

Bryan W. Shaw, Ph.D., *Chairman*  
Carlos Rubinstein, *Commissioner*  
Toby Baker, *Commissioner*  
Zak Covar, *Executive Director*



RECEIVED

MAY 07 2012

COUNTY ENGINEER

## TEXAS COMMISSION ON ENVIRONMENTAL QUALITY

*Protecting Texas by Reducing and Preventing Pollution*

May 1, 2012

Mr. James Gallaher  
Freedom Fellowship Church  
410 Oak Run Point  
New Braunfels, Texas 78132-3871

Re: Edwards Aquifer, Comal County

Name of Project: Freedom Fellowship Church; Located at 410 Oak Run Point; New Braunfels, Texas

Type of Plan: Request for Modification of an Approved Water Pollution Abatement Plan (WPAP); 30 Texas Administrative Code (TAC) Chapter 213 Edwards Aquifer

Edwards Aquifer Protection Program (EAPP) San Antonio File No. 1257.01; Investigation No. 989010; Regulated Entity No. RN102745890

Dear Mr. Gallaher:

The Texas Commission on Environmental Quality (TCEQ) has completed its review of the WPAP Modification for the above-referenced project submitted to the San Antonio Regional Office by Pawelek & Moy, Inc. on behalf of Freedom Fellowship Church on February 22, 2012. Final review of the WPAP was completed after additional material was received on April 2, 2012. As presented to the TCEQ, the Temporary and Permanent Best Management Practices (BMPs) and construction plans were prepared by a Texas Licensed Professional Engineer to be in general compliance with the requirements of 30 TAC Chapter 213. These planning materials were sealed, signed and dated by a Texas Licensed Professional Engineer. Therefore, based on the engineer's concurrence of compliance, the planning materials for construction of the proposed project and pollution abatement measures are hereby approved subject to applicable state rules and the conditions in this letter. The applicant or a person affected may file with the chief clerk a motion for reconsideration of the executive director's final action on this Edwards Aquifer Protection Plan. A motion for reconsideration must be filed no later than 23 days after the date of this approval letter. *This approval expires two (2) years from the date of this letter unless, prior to the expiration date, more than 10 percent of the construction has commenced on the project or an extension of time has been requested.*

### Background

The above referenced site was previously approved by letter dated July 26, 1999 for the construction of two church buildings along with associated parking lots and access drives, on a 5 acre tract. Stormwater runoff from the impervious cover was to be treated by a 0.70 acre vegetative filter strip and an enhanced extended detention basin designed in accordance with

Mr. James Gallaher

May 1, 2012

Page 2

the 1998 edition of the LCRA Nonpoint Source Pollution Control Technical Guidance Manual. Only the parking lots, access drives, and one of the two buildings have been constructed as of the date of this letter. This modification will continue the construction of the second building and add 3.05 acres to the site along with additional parking areas and access drives.

### **Project Description**

The proposed commercial project will have an area of approximately 8.05 acres. It will include the construction of the second church building approved in the previous approval, along with additional parking areas, access drives, utilities, a stormwater detention pond, and a sedimentation/filtration basin. The impervious cover will be 2.944 acres (36.6 percent). Project wastewater will be disposed of by conveyance to the existing Gruene Road Water Recycling Center owned by the New Braunfels Utilities.

### **Permanent Pollution Abatement Measures**

To prevent the pollution of stormwater runoff originating on-site or upgradient of the site and potentially flowing across and off the site after construction, four engineered vegetated filter strips and a partial sedimentation/filtration basin, designed using the TCEQ technical guidance document, Complying with the Edwards Aquifer Rules: Technical Guidance on Best Management Practices (2005), will be constructed to treat stormwater runoff. The existing 0.70 acre vegetated filter strip and the enhanced extended detention basin will continue to be utilized for the treatment of stormwater runoff. The required total suspended solids (TSS) treatment for this project is 2,643 pounds of TSS generated from the 2.944 acres of impervious cover. The approved measures meet the required 80 percent removal of the increased load in TSS caused by the project.

The individual treatment measures will consist of stormwater runoff from 1.902 acres of impervious cover being treated by the existing vegetated filter strip and enhanced extended detention basin.

The concrete lined partial sedimentation/filtration basin is designed to capture the first 3.33 inches of stormwater runoff from 0.316 acre of impervious cover within a 0.41 acre catchment area. The basin has been sized to account for 0.034 acres of impervious cover that was not able to be directed into the basin, providing a total capture volume of 3,594 cubic feet (3,481 cubic feet required). The filtration system for the basin will consist of 375 square feet of sand (290 square feet required) with an ASTM rating of C-33, which is 18 inches thick and an underdrain piping system covered with a minimum two inch gravel layer.

Four engineered vegetated filter strips will treat a total of 621 pounds of TSS from a total of 0.692 acres of impervious cover within a 3.57 acre drainage area. The vegetated filter strips will extend along the edge of the contributing area, be a minimum of 15 feet wide (in the direction of flow), have a uniform grade (free of gullies and rills), a maximum slope of 20 percent, and will have minimum vegetated cover of 80 percent.



### Geology

According to the geologic assessment included with the application, the site is located on the Person Formation of the Edwards Group. One geologic feature (inferred fault) was reported and assessed as not sensitive. The San Antonio Regional Office did not conduct a site assessment.

### Special Conditions

1. This modification is subject to all Special and Standard Conditions listed in the WPAP approval letter dated July 26, 1999.
2. All permanent pollution abatement measures shall be operational prior to use of the parking areas and access drive.
3. All sediment and/or media removed from the permanent pollution abatement measures during maintenance activities shall be properly disposed of according to 30 TAC 330 or 30 TAC 335, as applicable.

### Standard Conditions

1. Pursuant to Chapter 7 Subchapter C of the Texas Water Code, any violations of the requirements in 30 TAC Chapter 213 may result in administrative penalties.
2. The holder of the approved Edwards Aquifer protection plan must comply with all provisions of 30 TAC Chapter 213 and all best management practices and measures contained in the approved plan. Additional and separate approvals, permits, registrations and/or authorizations from other TCEQ Programs (i.e., Stormwater, Water Rights, UIC) can be required depending on the specifics of the plan.
3. In addition to the rules of the Commission, the applicant may also be required to comply with state and local ordinances and regulations providing for the protection of water quality.

### *Prior to Commencement of Construction:*

4. Within 60 days of receiving written approval of an Edwards Aquifer Protection Plan, the applicant must submit to the San Antonio Regional Office, proof of recordation of notice in the county deed records, with the volume and page number(s) of the county deed records of the county in which the property is located. A description of the property boundaries shall be included in the deed recordation in the county deed records. A suggested form (Deed Recordation Affidavit, TCEQ-0625) that you may use to deed record the approved WPAP is enclosed.
5. All contractors conducting regulated activities at the referenced project location shall be provided a copy of this notice of approval. At least one complete copy of the approved WPAP and this notice of approval shall be maintained at the project location until all regulated activities are completed.
6. Modification to the activities described in the referenced WPAP application following the date of approval may require the submittal of a plan to modify this approval, including the payment of appropriate fees and all information necessary for its review and approval prior to initiating construction of the modifications.

7. The applicant must provide written notification of intent to commence construction, replacement, or rehabilitation of the referenced project. Notification must be submitted to the San Antonio Regional Office no later than 48 hours prior to commencement of the regulated activity. Written notification must include the date on which the regulated activity will commence, the name of the approved plan and program ID number for the regulated activity, and the name of the prime contractor with the name and telephone number of the contact person. The executive director will use the notification to determine if the approved plan is eligible for an extension.
8. Temporary erosion and sedimentation (E&S) controls, i.e., silt fences, rock berms, stabilized construction entrances, or other controls described in the approved WPAP, must be installed prior to construction and maintained during construction. Temporary E&S controls may be removed when vegetation is established and the construction area is stabilized. If a water quality pond is proposed, it shall be used as a sedimentation basin during construction. The TCEQ may monitor stormwater discharges from the site to evaluate the adequacy of temporary E&S control measures. Additional controls may be necessary if excessive solids are being discharged from the site.
9. All borings with depths greater than or equal to 20 feet must be plugged with non-shrink grout from the bottom of the hole to within three (3) feet of the surface. The remainder of the hole must be backfilled with cuttings from the boring. All borings less than 20 feet must be backfilled with cuttings from the boring. All borings must be backfilled or plugged within four (4) days of completion of the drilling operation. Voids may be filled with gravel.

*During Construction:*

10. During the course of regulated activities related to this project, the applicant or agent shall comply with all applicable provisions of 30 TAC Chapter 213, Edwards Aquifer. The applicant shall remain responsible for the provisions and conditions of this approval until such responsibility is legally transferred to another person or entity.
11. This approval does not authorize the installation of temporary aboveground storage tanks on this project. If the contractor desires to install a temporary aboveground storage tank for use during construction, an application to modify this approval must be submitted and approved prior to installation. The application must include information related to tank location and spill containment. Refer to Standard Condition No. 6, above.
12. If any sensitive feature (caves, solution cavities, sink holes, etc.) is discovered during construction, all regulated activities near the feature must be suspended immediately. The applicant or his agent must immediately notify the San Antonio Regional Office of the discovery of the feature. Regulated activities near the feature may not proceed until the executive director has reviewed and approved the methods proposed to protect the feature and the aquifer from potentially adverse impacts to water quality. The plan must be sealed, signed, and dated by a Texas Licensed Professional Engineer.
13. No wells exist on site. All water wells, including injection, dewatering, and monitoring wells must be in compliance with the requirements of the Texas Department of Licensing and Regulation under Title 16 TAC Chapter 76 (relating to Water Well Drillers and Pump Installers) and all other locally applicable rules, as appropriate.



14. If sediment escapes the construction site, the sediment must be removed at a frequency sufficient to minimize offsite impacts to water quality (e.g., fugitive sediment in street being washed into surface streams or sensitive features by the next rain). Sediment must be removed from sediment traps or sedimentation ponds not later than when design capacity has been reduced by 50 percent. Litter, construction debris, and construction chemicals shall be prevented from becoming stormwater discharge pollutants.
15. Intentional discharges of sediment laden storm water are not allowed. If dewatering becomes necessary, the discharge will be filtered through appropriately selected best management practices. These may include vegetated filter strips, sediment traps, rock berms, silt fence rings, etc.
16. The following records shall be maintained and made available to the executive director upon request: the dates when major grading activities occur, the dates when construction activities temporarily or permanently cease on a portion of the site, and the dates when stabilization measures are initiated.
17. Stabilization measures shall be initiated as soon as practicable in portions of the site where construction activities have temporarily or permanently ceased, and construction activities will not resume within 21 days. When the initiation of stabilization measures by the 14th day is precluded by weather conditions, stabilization measures shall be initiated as soon as practicable.

*After Completion of Construction:*


18. A Texas Licensed Professional Engineer must certify in writing that the permanent BMPs or measures were constructed as designed. The certification letter must be submitted to the San Antonio Regional Office within 30 days of site completion.
19. The applicant shall be responsible for maintaining the permanent BMPs after construction until such time as the maintenance obligation is either assumed in writing by another entity having ownership or control of the property (such as without limitation, an owner's association, a new property owner or lessee, a district, or municipality) or the ownership of the property is transferred to the entity. The regulated entity shall then be responsible for maintenance until another entity assumes such obligations in writing or ownership is transferred. A copy of the transfer of responsibility must be filed with the executive director through San Antonio Regional Office within 30 days of the transfer. A copy of the transfer form (TCEQ-10263) is enclosed.
20. Upon legal transfer of this property, the new owner(s) is required to comply with all terms of the approved Edwards Aquifer protection plan. If the new owner intends to commence any new regulated activity on the site, a new Edwards Aquifer protection plan that specifically addresses the new activity must be submitted to the executive director. Approval of the plan for the new regulated activity by the executive director is required prior to commencement of the new regulated activity.
21. An Edwards Aquifer protection plan approval or extension will expire and no extension will be granted if more than 50 percent of the total construction has not been completed within ten years from the initial approval of a plan. A new Edwards Aquifer protection plan must be submitted to the San Antonio Regional Office with the appropriate fees for review and approval by the executive director prior to commencing any additional regulated activities.

Mr. James Gallaher  
May 1, 2012  
Page 6

22. At project locations where construction is initiated and abandoned, or not completed, the site shall be returned to a condition such that the aquifer is protected from potential contamination.

If you have any questions or require additional information, please contact Mr. Javier Anguiano of the Edwards Aquifer Protection Program of the San Antonio Regional Office at (210) 490-3096.

Sincerely,



Zack Covar, Executive Director  
Texas Commission on Environmental Quality

ZC/JA/eg

Enclosure: Deed Recordation Affidavit, Form TCEQ-0625  
Change in Responsibility for Maintenance of Permanent BMPs, Form TCEQ-10263

cc: Mr. John J. Moy, P.E., Pawelek & Moy, Inc.  
Mr. James C. Klien, P.E., City of New Braunfels  
Mr. Thomas H. Hornseth, P.E., Comal County  
Mr. Karl J. Dreher, Edwards Aquifer Authority  
TCEQ Central Records, Building F, MC 212



- RESIDENTIAL DEVELOPMENT
- SITE DEVELOPMENT
- PUBLIC WORKS
- UTILITIES

April 25, 2012

Mr. Javier Anguiano  
TCEQ San Antonio Regional Office – Region 13  
14250 Judson Rd.  
San Antonio, Texas 78233-4480

RECEIVED  
JUN 21 2012  
COUNTY ENGINEER

Re: Response to TCEQ Comments dated April 20, 2012  
Edwards Aquifer, Comal County  
NAME OF PROJECT: Freedom Fellowship Church  
TYPE OF PLAN: Request for the Modification of an Approved Water Pollution  
Abatement Plan (WPAP); 30 Texas Administrative Code (TAC) Chapter 213 Edwards  
Aquifer;  
Edwards Aquifer Protection Program San Antonio File No. 1257.01; Investigation No.  
989010; Regulated Entity No. RN102745890

Dear Mr. Anguiano,

Pawelek & Moy, Inc. (P&M) has addressed the comments by the TCEQ dated April 20, 2012 for the above mentioned project. P&M has taken the following actions with regards to the comments:

**General Concerns:**

<u>Comment</u>	<u>Response</u>
1	The Impervious Cover currently built at the site is 1.595 Ac. (32%) and is shown on Attachment "C" – Current Site Plan, Note #3, included with the application.
2	Please find the attached Certification Letter with Exhibit 'A' certifying to the required 2,250 cubic feet of volume in the existing extended detention basin and the required 0.70 acre vegetated filter strip associated with the previously approved WPAP, Dated July 26, 1999.
3	The treatment summary table has been revised to reflect the removal rate being provided with Basin B1 is 315 lb/yr. instead of the previously shown 323 lb/yr., see attached revised table.

Please call if you have questions regarding these responses. Thank you for your assistance.

Sincerely,

  
John J. Moy, Jr., P.E.  
Project Engineer

Attachments: Certification Letter with Exhibit 'A'

cc via email: Mr. James Gallaher – Freedom Fellowship Church

F:\1111.01 - FREEDOM FELLOWSHIP\DWG\WPAP\TCEQ COMMENTS\TCEQCOMMENTS.DOC

RECEIVED TCEQ  
SAN ANTONIO  
REGION  
2012 APR 25 PM 4:36

FREEDOM FELLOWSHIP CHURCH 8.05 ACRE SITE 2.944 ACRES OF IMPERVIOUS COVER									
Existing/Approved Enhanced Extended Detention Basin and Vegetative Filter Strip (Per Previously Approved WPAP)									
Watershed Area	Permanent BMP	Drainage Area (Acres)	Imp. Cover (Acres)						
*A1-A4	Existing Enhanced Extended Detention Basin and Vegetative Filter Strip	4.07	1.902	Note: The total proposed Impervious Cover of 1.902 acres is less than the maximum allowed Impervious Cover of 1.928 acres (per TCEQ Approval dated July 26, 1999).					
Basin B-1 Summary - Partial Sedimentation and Filtration Basin									
Watershed Area	Permanent BMP Partial Sedimentation and Filtration Basin	Drainage Area (Acres)	Imp. Cover (Acres)	Calc. Min. Capture Volume (cf)	Capture Volume Provided (cf)	Calc. Min. Filter Area (sf)	Filter Area Provided (sf)	Target TSS Removal (lb/yr)	TSS Removal Provided (lb/yr)
B1	Basin B1	0.41	0.316	3,481	3,594	290	348	284	315
**Uncaptured Area 'C3' (Portion Offsite Driveway Apron Draining towards State Highway 46)	Overtreatment in Basin B1	0.01	0.009	----	----	----	----	8	0
**Uncaptured Area 'C4' (Portion Offsite Driveway Apron Draining away from State Highway 46)	Overtreatment in Basin B1	0.02	0.024	----	----	----	----	22	0
**Uncaptured Area 'D1' (Offsite Sidewalk)	Overtreatment in Basin B1	0.001	0.001	----	----	----	----	1	0
Sub-Total - Basin B1	----	0.44	0.350	----	----	----	----	315	315
Engineered Vegetative Filter Strips									
Watershed Area	Permanent BMP	Drainage Area (Acres)	Imp. Cover (Acres)	Calc. Min. Capture Volume (cf)	Capture Volume Provided (cf)	Calc. Min. Filter Area (sf)	Filter Area Provided (sf)	Target TSS Removal (lb/yr)	TSS Removal Provided (lb/yr)
A5	Vegetative Filter Strips	0.11	0.020	----	----	----	----	18	18
B2	Vegetative Filter Strips	0.63	0.287	----	----	----	----	258	258
B3	Vegetative Filter Strips	1.11	0.066					59	59
B4	Vegetative Filter Strips	1.72	0.319					286	286
Sub-Total - Vegetative Filter Strips	----	3.57	0.692	----	----	----	----	621	621
Total	----	**8.08	2.944	----	----	----	----	936	936

**Notes:**

- \*1. Includes existing driveway aprons shown on previously approved WPAP (per TCEQ letter dated July 26, 1999)
- \*\*2. Areas 'C3', 'C4' and 'D1' are Off-Site Areas (Proposed Driveway and Sidewalk, respectively) (Uncaptured) but being treated by Overtreatment provide with the Water Quality Basin B1.
- 3. Drainage Areas 'C1' and 'C2' are Off-site/By-pass Areas.



- RESIDENTIAL DEVELOPMENT
- SITE DEVELOPMENT
- PUBLIC WORKS
- UTILITIES

April 25, 2012

Mr. Javier Anguiano  
TCEQ San Antonio Regional Office – Region 13  
14250 Judson Rd.  
San Antonio, Texas 78233-4480

Re: Response to TCEQ Comments dated April 20, 2012  
Edwards Aquifer, Comal County  
NAME OF PROJECT: Freedom Fellowship Church  
TYPE OF PLAN: Request for the Modification of an Approved Water Pollution  
Abatement Plan (WPAP); 30 Texas Administrative Code (TAC) Chapter 213 Edwards  
Aquifer;  
Edwards Aquifer Protection Program San Antonio File No. 1257.01; Investigation No.  
989010; Regulated Entity No. RN102745890

**Certification Letter for the existing Enhanced Extended Detention Basin Volume  
and the Area of the existing Vegetative Filter Strip.**


Dear Mr. Anguiano,

Please accept this letter as certification that the existing Enhanced Extended Detention Basin captures approximately 3,100 cubic feet of stormwater runoff, which is greater than the 2,250 cubic feet required in the approved WPAP dated July 26, 1999, see attached Exhibit 'A'. Additionally, the area that was delineated as Vegetative Filter Strip on the Site Plan for the originally approved WPAP is approximately 1.31 acres, which is greater than the 0.70 acres required in the approved WPAP dated July 26, 1999, see attached Exhibit 'A'.

Please call if you have questions regarding these responses. Thank you for your assistance.

Sincerely,

*John J. Moy, Jr., P.E.*  
John J. Moy, Jr., P.E.  
Project Engineer

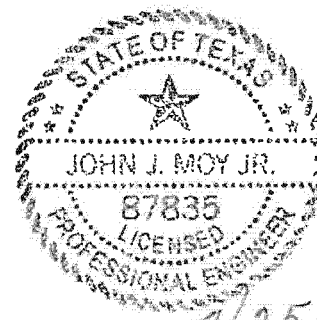

Attachments: Certification Letter with Exhibit 'A'


cc via email: Mr. James Gallaher – Freedom Fellowship Church

F:\1111.01 - FREEDOM FELLOWSHIP\DWG\WPAP\TCEQ COMMENTS\TCEQCOMMENTS.DOC

APPROXIMATELY 3,100 CUBIC FEET OF EXISTING  
STORMWATER CAPTURE VOLUME IN THE ENHANCED  
EXTENDED DETENTION BASIN FROM ORIGINALLY  
APPROVED WPAP, DATED JULY 26, 1999.

APPROXIMATE LIMITS OF VEGETATIVE  
FILTER STRIP SHOWN ON SITE PLAN  
FROM ORIGINALLY APPROVED WPAP,  
DATED JULY 26, 1999. ( $\pm 1.31$  AC.)

OAK RUN POINT  
(60' ROW)



( IN FEET )  
1 inch = 100 ft.

# EXHIBIT "A" FOR FREEDOM FELLOWSHIP CHURCH



**PAWELEK & MOY, INC.**

CIVIL ENGINEERING & CONSULTING SERVICES  
130 W. Jahn Street tel: (830) 629-2563  
New Braunfels, Texas 78130 fax: (830) 629-2564

TECHNICIAN:	D.G.III	DATE:	04-23-12
JOB NO.	1111.01	SHEET:	E1





F A X T R A N S M I T T A L

DATE: April 20, 2012NUMBER OF PAGES (including this  
cover sheet):

2

TO: Name Mr. John J. Moy, P.E.  
Organization Pawelek & Moy, Inc.  
FAX Number 830/629-2564

TO: Name Mr. James Gallaher  
Organization Freedom Fellowship Church  
FAX Number 830/620-4642

FROM: TEXAS COMMISSION ON ENVIRONMENTAL QUALITY

Name Javier Angulano  
Division/Region EAPP/San Antonio  
Telephone Number 210/403-4019  
FAX Number 210/545-4329

## NOTES:

Re: Edwards Aquifer, Comal County  
NAME OF PROJECT: Freedom Fellowship Church; Located at 410 Oak Run Point;  
New Braunfels, Texas.  
TYPE OF PLAN: Request for the Modification of an Approved of a Water Pollution  
Abatement Plan (WPAP); 30 Texas Administrative Code (TAC) Chapter 213 Edwards  
Aquifer;  
Edwards Aquifer Protection Program San Antonio File No. 1257.01; Investigation No.  
989010; Regulated Entity No. RN102745890

Dear Mr. Moy:

We are in the process of technically reviewing the WPAP Modification application you submitted for the above-referenced project. Before we can proceed with our review, the following comments relating to the application must be addressed:

## General Concerns:

1. What is the impervious cover (IC) currently built at the site?
2. Special Conditions 6 of the July 26, 1999 approval letter required written certification, from a Texas Licensed P.E., that the extended detention was constructed to capture 2,250 cubic feet of stormwater runoff be submitted to the Regional Office

Mr. John J. Moy, P.E.  
April 20, 2012  
Page 2

upon the basin's completion. Since the previously approved PBMPs are to be utilized for the treatment of stormwater runoff, please provide the aforementioned certification letter and certify that the previously approved vegetated filter strip area is sized to equal the calculated 0.70 acres.

3. The treatment summary table states the provided TSS removal rate for Basin B1 to be 323 lb/yr. However, the desired TSS removal rate was stated to be 315 to the sizing calculations. Revise as necessary.

We ask that you submit **one original and four copies** of the amended materials to supplement the WPAP Modification application to this office by no later than **14 days from the date of this letter** to avoid denial of the plan. If the response to this notice is not received, is incomplete or inadequate, or provides new information that is incomplete or inadequate, a second notice will be sent to you requiring a response within 14 days from the notice date. If the response to the second is not received, is incomplete or inadequate, or provides new information that is incomplete or inadequate, the application will be denied unless you provide written notification that the application is being withdrawn. Please note that the application fee will be forfeited if the plan is not withdrawn. If you have any questions or require additional information, please contact Javier Anguiano of the Edwards Aquifer Protection Program of the San Antonio Regional Office at the number listed above.  
**[END]**

- RESIDENTIAL DEVELOPMENT
- SITE DEVELOPMENT
- PUBLIC WORKS
- UTILITIES

April 25, 2012

Mr. Javier Anguiano  
TCEQ San Antonio Regional Office – Region 13  
14250 Judson Rd.  
San Antonio, Texas 78233-4480

New Braunfels

Re: Response to TCEQ Comments dated April 20, 2012  
Edwards Aquifer, Comal County  
NAME OF PROJECT: Freedom Fellowship Church  
TYPE OF PLAN: Request for the Modification of an Approved Water Pollution  
Abatement Plan (WPAP); 30 Texas Administrative Code (TAC) Chapter 213 Edwards  
Aquifer;  
Edwards Aquifer Protection Program San Antonio File No. 1257.01; Investigation No.  
989010; Regulated Entity No. RN102745890

Dear Mr. Anguiano,

Pawelek & Moy, Inc. (P&M) has addressed the comments by the TCEQ dated April 20, 2012 for the above mentioned project. P&M has taken the following actions with regards to the comments:

RECEIVED

JUN 21 2012

**General Concerns:**

<u>Comment</u>	<u>Response</u>
----------------	-----------------

- |   |                                                                                                                                                                                                                                                                                    |
|---|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | The Impervious Cover currently built at the site is 1.595 Ac. (32%) and is shown on Attachment "C" – Current Site Plan, Note #3, included with the application.                                                                                                                    |
| 2 | Please find the attached Certification Letter with Exhibit 'A' certifying to the required 2,250 cubic feet of volume in the existing extended detention basin and the required 0.70 acre vegetated filter strip associated with the previously approved WPAP, Dated July 26, 1999. |
| 3 | The treatment summary table has been revised to reflect the removal rate being provided with Basin B1 is 315 lb/yr. instead of the previously shown 323 lb/yr., see attached revised table.                                                                                        |

COUNTY ENGINEER

Please call if you have questions regarding these responses. Thank you for your assistance.

Sincerely,

*John J. Moy, Jr., P.E.*  
John J. Moy, Jr., P.E.  
Project Engineer

Attachments: Certification Letter with Exhibit 'A'

cc via email: Mr. James Gallaher – Freedom Fellowship Church

F:\1111.01 - FREEDOM FELLOWSHIP\DWG\WPAP\TCEQ COMMENTS\TCEQCOMMENTS.DOC

RECEIVED TCEQ  
SAN ANTONIO  
REGION  
2012 APR 25 PM 4:36



FREEDOM FELLOWSHIP CHURCH 8.05 ACRE SITE 2.944 ACRES OF IMPERVIOUS COVER									
Existing/Approved Enhanced Extended Detention Basin and Vegetative Filter Strip (Per Previously Approved WPAP)									
Watershed Area	Permanent BMP	Drainage Area (Acres)	Imp. Cover (Acres)						
*A1-A4	Existing Enhanced Extended Detention Basin and Vegetative Filter Strip	4.07	1.902	Note: The total proposed Impervious Cover of 1.902 acres is less than the maximum allowed Impervious Cover of 1.928 acres (per TCEQ Approval dated July 26, 1999).					
Basin B-1 Summary - Partial Sedimentation and Filtration Basin									
Watershed Area	Permanent BMP Partial Sedimentation and Filtration Basin	Drainage Area (Acres)	Imp. Cover (Acres)	Calc. Min. Capture Volume (cf)	Capture Volume Provided (cf)	Calc. Min. Filter Area (sf)	Filter Area Provided (sf)	Target TSS Removal (lb/yr)	TSS Removal Provided (lb/yr)
B1	Basin B1	0.41	0.316	3,481	3,594	290	348	284	315
**Uncaptured Area 'C3' (Portion Offsite Driveway Apron Draining towards State Highway 46)	Overtreatment in Basin B1	0.01	0.009	----	----	----	----	8	0
**Uncaptured Area 'C4' (Portion Offsite Driveway Apron Draining away from State Highway 46)	Overtreatment in Basin B1	0.02	0.024	----	----	----	----	22	0
**Uncaptured Area 'D1' (Offsite Sidewalk)	Overtreatment in Basin B1	0.001	0.001	----	----	----	----	1	0
Sub-Total - Basin B1	----	0.44	0.350	----	----	----	----	315	315
Engineered Vegetative Filter Strips									
Watershed Area	Permanent BMP	Drainage Area (Acres)	Imp. Cover (Acres)	Calc. Min. Capture Volume (cf)	Capture Volume Provided (cf)	Calc. Min. Filter Area (sf)	Filter Area Provided (sf)	Target TSS Removal (lb/yr)	TSS Removal Provided (lb/yr)
A5	Vegetative Filter Strips	0.11	0.020	----	----	----	----	18	18
B2	Vegetative Filter Strips	0.63	0.287	----	----	----	----	258	258
B3	Vegetative Filter Strips	1.11	0.066					59	59
B4	Vegetative Filter Strips	1.72	0.319					286	286
Sub-Total - Vegetative Filter Strips	----	3.57	0.692	----	----	----	----	621	621
Total	----	**8.08	2.944	----	----	----	----	936	936

**Notes:**

- \*1. Includes existing driveway aprons shown on previously approved WPAP (per TCEQ letter dated July 26, 1999)
- \*\*2. Areas 'C3', 'C4' and 'D1' are Off-Site Areas (Proposed Driveway and Sidewalk, respectively) (Uncaptured) but being treated by Overtreatment provide with the Water Quality Basin B1.
- 3. Drainage Areas 'C1' and 'C2' are Off-site/By-pass Areas.

- RESIDENTIAL DEVELOPMENT
- SITE DEVELOPMENT
- PUBLIC WORKS
- UTILITIES

April 25, 2012

Mr. Javier Anguiano  
TCEQ San Antonio Regional Office – Region 13  
14250 Judson Rd.  
San Antonio, Texas 78233-4480

Re: Response to TCEQ Comments dated April 20, 2012  
Edwards Aquifer, Comal County  
NAME OF PROJECT: Freedom Fellowship Church  
TYPE OF PLAN: Request for the Modification of an Approved Water Pollution  
Abatement Plan (WPAP); 30 Texas Administrative Code (TAC) Chapter 213 Edwards  
Aquifer;  
Edwards Aquifer Protection Program San Antonio File No. 1257.01; Investigation No.  
989010; Regulated Entity No. RN102745890

**Certification Letter for the existing Enhanced Extended Detention Basin Volume  
and the Area of the existing Vegetative Filter Strip.**


Dear Mr. Anguiano,

Please accept this letter as certification that the existing Enhanced Extended Detention Basin captures approximately 3,100 cubic feet of stormwater runoff, which is greater than the 2,250 cubic feet required in the approved WPAP dated July 26, 1999, see attached Exhibit 'A'. Additionally, the area that was delineated as Vegetative Filter Strip on the Site Plan for the originally approved WPAP is approximately 1.31 acres, which is greater than the 0.70 acres required in the approved WPAP dated July 26, 1999, see attached Exhibit 'A'.

Please call if you have questions regarding these responses. Thank you for your assistance.

Sincerely,

*John J. Moy, Jr., P.E.*  
John J. Moy, Jr., P.E.  
Project Engineer

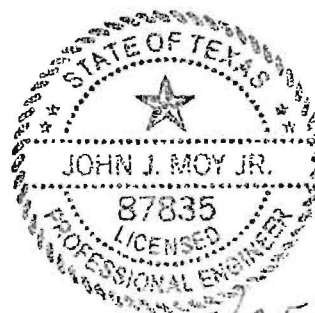

Attachments: Certification Letter with Exhibit 'A'


cc via email: Mr. James Gallaher – Freedom Fellowship Church

F:\1111.01 - FREEDOM FELLOWSHIP\DWG\WPAP\TCEQ COMMENTS\TCEQCOMMENTS.DOC

APPROXIMATELY 3,100 CUBIC FEET OF EXISTING  
STORMWATER CAPTURE VOLUME IN THE ENHANCED  
EXTENDED DETENTION BASIN FROM ORIGINALLY  
APPROVED WPAP, DATED JULY 26, 1999.

APPROXIMATE LIMITS OF VEGETATIVE  
FILTER STRIP SHOWN ON SITE PLAN  
FROM ORIGINALLY APPROVED WPAP,  
DATED JULY 26, 1999. ( $\pm 1.31$  AC.)

OAK RUN POINT  
(60' ROW)



( IN FEET )  
1 inch = 100 ft.

EXHIBIT "A"  
FOR  
FREEDOM FELLOWSHIP CHURCH



**PAWELEK & MOY, INC.**

CIVIL ENGINEERING & CONSULTING SERVICES  
130 W. Jahn Street tel: (830) 629-2563  
New Braunfels, Texas 78130 fax: (830) 629-2564

TECHNICIAN:	D.G.III	DATE:	04-23-12
JOB NO.	1111.01	SHEET:	E1





**TCEQ**  
Protecting Texas  
by Reducing and  
Preventing Pollution

F A X T R A N S M I T T A L

DATE: April 20, 2012NUMBER OF PAGES (including this  
cover sheet):2

TO: Name Mr. John J. Moy, P.E.  
Organization Pawelek & Moy, Inc.  
FAX Number 830/629-2564

TO: Name Mr. James Gallaher  
Organization Freedom Fellowship Church  
FAX Number 830/620-4642

FROM: TEXAS COMMISSION ON ENVIRONMENTAL QUALITY

Name Javier Anguiano  
Division/Region EAPP/San Antonio  
Telephone Number 210/403-4019  
FAX Number 210/545-4329

## NOTES:

Re: Edwards Aquifer, Comal County  
NAME OF PROJECT: Freedom Fellowship Church; Located at 410 Oak Run Point;  
New Braunfels, Texas.  
TYPE OF PLAN: Request for the Modification of an Approved of a Water Pollution  
Abatement Plan (WPAP); 30 Texas Administrative Code (TAC) Chapter 213 Edwards  
Aquifer;  
Edwards Aquifer Protection Program San Antonio File No. 1257.01; Investigation No.  
989010; Regulated Entity No. RN102745890

Dear Mr. Moy:

We are in the process of technically reviewing the WPAP Modification application you submitted for the above-referenced project. Before we can proceed with our review, the following comments relating to the application must be addressed:

## General Concerns:

1. What is the impervious cover (IC) currently built at the site?
2. Special Conditions 6 of the July 26, 1999 approval letter required written certification, from a Texas Licensed P.E., that the extended detention was constructed to capture 2,250 cubic feet of stormwater runoff be submitted to the Regional Office

Mr. John J. Moy, P.E.

April 20, 2012

Page 2

upon the basin's completion. Since the previously approved PBMPs are to be utilized for the treatment of stormwater runoff, please provide the aforementioned certification letter and certify that the previously approved vegetated filter strip area is sized to equal the calculated 0.70 acres.

3. The treatment summary table states the provided TSS removal rate for Basin B1 to be 323 lb/yr. However, the desired TSS removal rate was stated to be 315 to the sizing calculations. Revise as necessary.

We ask that you submit **one original and four copies** of the amended materials to supplement the WPAP Modification application to this office by no later than **14 days from the date of this letter** to avoid denial of the plan. If the response to this notice is not received, is incomplete or inadequate, or provides new information that is incomplete or inadequate, a second notice will be sent to you requiring a response within 14 days from the notice date. If the response to the second is not received, is incomplete or inadequate, or provides new information that is incomplete or inadequate, the application will be denied unless you provide written notification that the application is being withdrawn. Please note that the application fee will be forfeited if the plan is not withdrawn. If you have any questions or require additional information, please contact Javier Anguiano of the Edwards Aquifer Protection Program of the San Antonio Regional Office at the number listed above.  
[END]

Bryan W. Shaw, Ph.D., *Chairman*  
Buddy Garcia, *Commissioner*  
Carlos Rubinstein, *Commissioner*  
Mark R. Vickery, P.G., *Executive Director*



## TEXAS COMMISSION ON ENVIRONMENTAL QUALITY

*Protecting Texas by Reducing and Preventing Pollution*

February 23, 2012

**RECEIVED**

FEB 29 2012

**COUNTY ENGINEER**

Mr. Thomas H. Hornseth, P.E.  
Comal County Engineer  
195 David Jonas Drive  
New Braunfels TX 78132-3710

Re: Edwards Aquifer, Comal County  
PROJECT NAME: Freedom Fellowship Church, located at 410 Oak Run Point, New Braunfels, Texas  
PLAN TYPE: Application for Approval of a Water Pollution Abatement Plan (WPAP) 30 Texas Administration Code (TAC) Chapter 213; Edwards Aquifer Protection Program  
EAPP File No.: 1257.01

Dear Mr. Hornseth:

The referenced application is being forwarded to you pursuant to the Edwards Aquifer Rules. The Texas Commission on Environmental Quality (TCEQ) is required by 30 TAC Chapter 213 to provide copies of all applications to affected incorporated cities and underground water conservation districts for their comments prior to TCEQ approval.

Please forward your comments to this office by March 22, 2012.

The Texas Commission on Environmental Quality appreciates your assistance in this matter and your compliance efforts to ensure protection of the State's environment. If you or members of your staff have any questions regarding these matters, please feel free to contact the San Antonio Region Office at (210) 490-3096.

Sincerely

A handwritten signature in blue ink, appearing to read "Todd Jones".

Todd Jones  
Water Section Work Leader  
San Antonio Regional Office

TJ/eg





CIVIL ENGINEERING & CONSULTING SERVICES

- RESIDENTIAL DEVELOPMENT
- SITE DEVELOPMENT
- PUBLIC WORKS
- UTILITIES

FEB 22 2012

TCEQ-R13

# *Modification of a Previously Approved Water Pollution Abatement Plan*

## *Freedom Fellowship Church*

*410 Oak Run Point  
New Braunfels, Texas 78132*

by

***Pawelek & Moy, Inc.***

***Job No. 1111.01***

***February 2012***



*John J. Moy Jr. P.E.  
2/21/12*

## Modification of a Previously Approved Plan Checklist

- X General Information Form (TCEQ-0587)
  - ATTACHMENT A - Road Map
  - ATTACHMENT B - USGS / Edwards Recharge Zone Map
  - ATTACHMENT C - Project Description
  
- X Geologic Assessment Form (TCEQ-0585)
  - ATTACHMENT A - Geologic Assessment Table, TCEQ-0585-Table
  - Comments to the Geologic Assessment Table
  - ATTACHMENT B - Soil Profile and Narrative of Soil Units
  - ATTACHMENT C - Stratigraphic Column
  - ATTACHMENT D - Narrative of Site Specific Geology
  - Site Geologic Map(s)
  - Table or list for the position of features' latitude/longitude (if mapped using GPS)
  
- X Modification of a Previously Approved Plan (TCEQ-0590)
  - ATTACHMENT A - Original Approval Letter and Approved Modification Letters
  - ATTACHMENT B - Narrative of Proposed Modification
  - ATTACHMENT C - Current Site Plan of the Approved Project
  
- X Application Form (appropriate for the modification)
  - Aboveground Storage Tank Facility Plan (TCEQ-0575)
  - Organized Sewage Collection System Plan (TCEQ-0582)
  - Underground Storage Tank Facility Plan (TCEQ-0583)
  - Water Pollution Abatement Plan Application Form (TCEQ-0584)
  - Lift Station / Force Main System Application (TCEQ-0624)
  
- X Temporary Stormwater Section (TCEQ-0602), if necessary
  - ATTACHMENT A - Spill Response Actions
  - ATTACHMENT B - Potential Sources of Contamination
  - ATTACHMENT C - Sequence of Major Activities
  - ATTACHMENT D - Temporary Best Management Practices and Measures
  - ATTACHMENT E - Request to Temporarily Seal a Feature, if sealing a feature
  - ATTACHMENT F - Structural Practices
  - ATTACHMENT G - Drainage Area Map
  - ATTACHMENT H - Temporary Sediment Pond(s) Plans and Calculations
  - ATTACHMENT I - Inspection and Maintenance for BMPs
  - ATTACHMENT J - Schedule of Interim and Permanent Soil Stabilization Practices
  
- X Permanent Stormwater Section (TCEQ-0600), if necessary
  - ATTACHMENT A - 20% or Less Impervious Cover Waiver, if project is multi-family residential, a school, or a small business and 20% or less impervious cover is proposed for the site
  - ATTACHMENT B - BMPs for Upgradient Stormwater
  - ATTACHMENT C - BMPs for On-site Stormwater
  - ATTACHMENT D - BMPs for Surface Streams
  - ATTACHMENT E - Request to Seal Features, if sealing a feature
  - ATTACHMENT F - Construction Plans
  - ATTACHMENT G - Inspection, Maintenance, Repair and Retrofit Plan
  - ATTACHMENT H - Pilot-Scale Field Testing Plan, if BMPs not based on *Complying with the Edwards Aquifer Rules: Technical Guidance for BMPs*
  - ATTACHMENT I - Measures for Minimizing Surface Stream Contamination

**Modification of a Previously Approved Plan Checklist** (continued)

- X Agent Authorization Form (*TCEQ-0599*), if application submitted by agent
- X Application Fee Form (*TCEQ-0574*)
- X Check Payable to the "Texas Commission on Environmental Quality"
- X Core Data Form (*TCEQ-10400*)



**General Information Form**  
For Regulated Activities on the  
Edwards Aquifer Recharge and Transition Zones  
and Relating to 30 TAC §213.4(b) & §213.5(b)(2)(A), (B)  
Effective June 1, 1999

REGULATED ENTITY NAME: Freedom Fellowship Church  
COUNTY: Comal STREAM BASIN: Blieber's Creek

EDWARDS AQUIFER: ☒ RECHARGE ZONE  
☐ TRANSITION ZONE

PLAN TYPE: ☐ WPAP ☐ AST ☐ EXCEPTION  
☐ SCS ☐ UST ☒ MODIFICATION

**CUSTOMER INFORMATION**

1. Customer (Applicant):

Contact Person: James Gallaher  
Entity: Freedom Fellowship Church  
Mailing Address: 410 Oak Run Point  
City, State: New Braunfels, Texas Zip: 78132-3871  
Telephone: (830) 625-1288 FAX: (830) 620-4642

Agent/Representative (If any):

Contact Person: John J. Moy, Jr.  
Entity: Pawelek & Moy, Inc.  
Mailing Address: 130 W. Jahn St.  
City, State: New Braunfels, Texas Zip: 78130  
Telephone: (830) 629-2563 FAX: (830) 629-2564

2. ☒ This project is inside the city limits of New Braunfels.  
☐ This project is outside the city limits but inside the ETJ (extra-territorial jurisdiction) of \_\_\_\_\_.  
☐ This project is not located within any city's limits or ETJ.

3. The location of the project site is described below. The description provides sufficient detail and clarity so that the TCEQ's Regional staff can easily locate the project and site boundaries for a field investigation.

Address: 410 Oak Run Point, New Braunfels, Texas  
Site is approximately 600 feet north of the intersection of  
State Highway 46 and Oak Run Point, on Oak Run Point.

4. ☒ **ATTACHMENT A - ROAD MAP.** A road map showing directions to and the location of the project site is attached at the end of this form.
5. ☒ **ATTACHMENT B - USGS / EDWARDS RECHARGE ZONE MAP.** A copy of the official 7 1/2 minute USGS Quadrangle Map (Scale: 1" = 2000') of the Edwards Recharge Zone is attached behind this sheet. The map(s) should clearly show:

- X   Project site.
- X   USGS Quadrangle Name(s).
- X   Boundaries of the Recharge Zone (and Transition Zone, if applicable).
- X   Drainage path from the project to the boundary of the Recharge Zone.

6.   X   Sufficient survey staking is provided on the project to allow TCEQ regional staff to locate the boundaries and alignment of the regulated activities and the geologic or manmade features noted in the Geologic Assessment. **The TCEQ must be able to inspect the project site or the application will be returned.**

7.   X   **ATTACHMENT C - PROJECT DESCRIPTION.** Attached at the end of this form is a detailed narrative description of the proposed project.

8. Existing project site conditions are noted below:

- X   Existing commercial site (5.00 Ac)
- Existing industrial site
- Existing residential site
- Existing paved and/or unpaved roads
- Undeveloped (Cleared)
- X   Undeveloped (Undisturbed/Uncleared) (3.05 Ac.)
- Other: \_\_\_\_\_

#### PROHIBITED ACTIVITIES

9.   X   I am aware that the following activities are prohibited on the **Recharge Zone** and are not proposed for this project:

- (1) waste disposal wells regulated under 30 TAC Chapter 331 of this title (relating to Underground Injection Control);
- (2) new feedlot/concentrated animal feeding operations, as defined in 30 TAC §213.3;
- (3) land disposal of Class I wastes, as defined in 30 TAC §335.1;
- (4) the use of sewage holding tanks as parts of organized collection systems; and
- (5) new municipal solid waste landfill facilities required to meet and comply with Type I standards which are defined in §330.41(b), (c), and (d) of this title (relating to Types of Municipal Solid Waste Facilities).

10.   N/A   I am aware that the following activities are prohibited on the **Transition Zone** and are not proposed for this project:

- (1) waste disposal wells regulated under 30 TAC Chapter 331 (relating to Underground Injection Control);
- (2) land disposal of Class I wastes, as defined in 30 TAC §335.1; and
- (3) new municipal solid waste landfill facilities required to meet and comply with Type I standards which are defined in §330.41 (b), (c), and (d) of this title.

#### ADMINISTRATIVE INFORMATION

11. The fee for the plan(s) is based on:

- X   For a Water Pollution Abatement Plan and Modifications, the total acreage of the site where regulated activities will occur.
- For an Organized Sewage Collection System Plans and Modifications, the total linear

- footage of all collection system lines.
- For a UST Facility Plan or an AST Facility Plan, the total number of tanks or piping systems.
- A request for an exception to any substantive portion of the regulations related to the protection of water quality.
- A request for an extension to a previously approved plan.
12. Application fees are due and payable at the time the application is filed. If the correct fee is not submitted, the TCEQ is not required to consider the application until the correct fee is submitted. Both the fee and the Edwards Aquifer Fee Form have been sent to the Commission's:
- TCEQ cashier
- Austin Regional Office (for projects in Hays, Travis, and Williamson Counties)
- X San Antonio Regional Office (for projects in Bexar, Comal, Kinney, Medina, and Uvalde Counties)
13. X Submit one (1) original and one (1) copy of the application, plus additional copies as needed for each affected incorporated city, groundwater conservation district, and county in which the project will be located. The TCEQ will distribute the additional copies to these jurisdictions. The copies must be submitted to the appropriate regional office.
14. X No person shall commence any regulated activity until the Edwards Aquifer Protection Plan(s) for the activity has been filed with and approved by the Executive Director.

To the best of my knowledge, the responses to this form accurately reflect all information requested concerning the proposed regulated activities and methods to protect the Edwards Aquifer. This **GENERAL INFORMATION FORM** is hereby submitted for TCEQ review. The application was prepared by:

John J. Moy, Jr.

Print Name of Customer/Agent

Signature of Customer/Agent


Date

2/21/12

If you have questions on how to fill out this form or about the Edwards Aquifer protection program, please contact us at 210/490-3096 for projects located in the San Antonio Region or 512/339-2929 for projects located in the Austin Region.

Individuals are entitled to request and review their personal information that the agency gathers on its forms. They may also have any errors in their information corrected. To review such information, contact us at 512/239-3282.



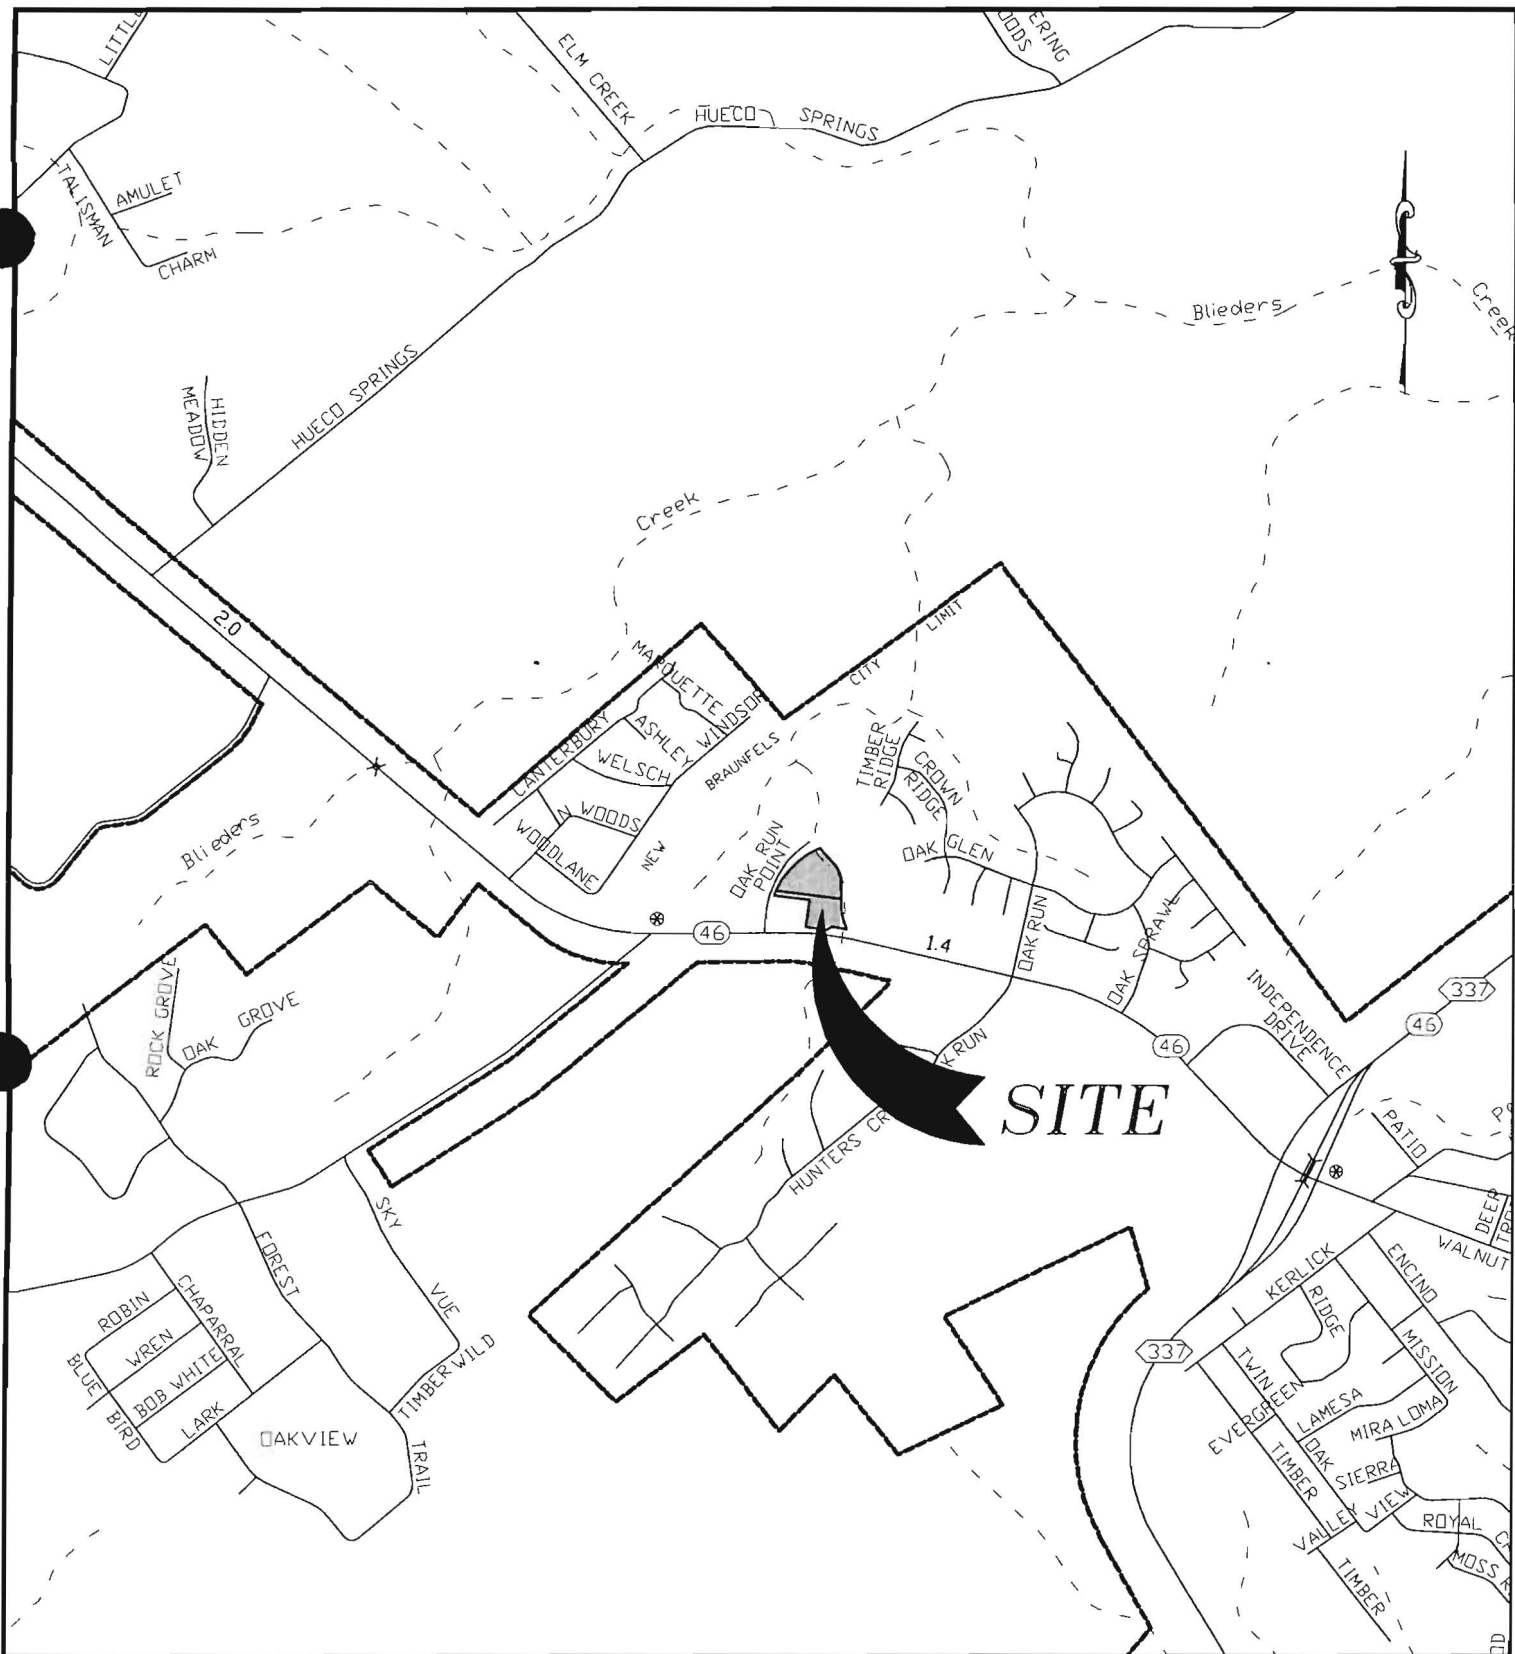

# LOCATION MAP

SCALE: 1" = 2000'

## ATTACHMENT A ROAD MAP



**PAWELEK & MOY, INC.**

CIVIL ENGINEERING & CONSULTING SERVICES

130 W. Jahn Street

tel: (830) 629-2563

New Braunfels, Texas 78130

fax: (830) 629-2564

TECHNICIAN:

D.G.III

DATE:

01-06-12

JOB NO.

1111.01

SHEET:

R1

**ATTACHMENT B**  
**USGS/EDWARDS RECHARGE ZONE MAP**





Produced by the United States Geological Survey  
Revised in cooperation with the Texas Water Development Board  
Control by USGS, NOS/NOAA, and USCE

Compiled by the Army Map Service by photogrammetric methods  
from aerial photographs taken 1956. Field checked 1958  
Revised from aerial photographs taken 1966. Field checked 1967  
Map edited 1968

Projection and 10,000-foot grid ticks: Texas coordinate  
system, south central zone (Lambert conformal conic)  
1000-meter Universal Transverse Mercator grid, zone 14  
1927 North American Datum  
To place on the projected North American Datum, 1983  
move the projection lines 20 meters south and  
20 meters east as shown by dashed corner ticks

Fine red dashed lines indicate selected fence and field lines  
generally visible on aerial photographs. This information is unclassified

UTM GRID AND 1983 MAGNETIC NORTH  
DECLINATION AT CENTER OF MAP  
DIAGRAM IS APPROXIMATE

SCALE 1:24 000

CONTOUR INTERVAL 10 FEET  
NATIONAL GEODETIC VERTICAL DATUM OF 1929

QUADRANGLE LOCATION

TEXAS

2988-413

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS  
FOR SALE BY U. S. GEOLOGICAL SURVEY, DENVER, COLORADO 80226, OR RESTON, VIRGINIA 22092  
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

1988  
DMA 6343 II NW-SERIES V822

ROAD CLASSIFICATION

Primary highway, hard surface ..... Light-duty road, hard or improved surface .....  
Secondary highway, hard surface ..... Unimproved road .....  
Interstate Route U. S. Route State Route

Produced by the United States Geological Survey  
Revised in cooperation with the Texas Water Development Board  
Control by USGS, NOS/NOAA, and USCE

Compiled by the Army Map Service by photogrammetric methods  
from aerial photographs taken 1956. Field checked 1958  
Revised from aerial photographs taken 1966. Field checked 1967  
Map edited 1968

Projection and 10,000-foot grid ticks: Texas coordinate  
system, south central zone (Lambert conformal conic)  
1000-meter Universal Transverse Mercator grid, zone 14  
1927 North American Datum  
To place on the projected North American Datum, 1983  
move the projection lines 20 meters south and  
20 meters east as shown by dashed corner ticks

Fine red dashed lines indicate selected fence and field lines  
generally visible on aerial photographs. This information is unclassified

UTM GRID AND 1983 MAGNETIC NORTH  
DECLINATION AT CENTER OF SHEET

SCALE 1:24 000

CONTOUR INTERVAL 10 FEET  
SUPPLEMENTARY CONTOUR INTERVALS 5 FEET  
NATIONAL GEODETIC VERTICAL DATUM OF 1929

QUADRANGLE LOCATION

TEXAS

2988-414

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS  
FOR SALE BY U. S. GEOLOGICAL SURVEY, DENVER, COLORADO 80226, OR RESTON, VIRGINIA 22092  
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

1988  
DMA 6343 II NE-SERIES V882

ROAD CLASSIFICATION

Primary highway, hard surface ..... Light-duty road, hard or improved surface .....  
Secondary highway, hard surface ..... Unimproved road .....  
Interstate Route U. S. Route State Route

Produced by the United States Geological Survey  
Revised in cooperation with the Texas Water Development Board  
Control by USGS, NOS/NOAA, and USCE

Compiled by the Army Map Service by photogrammetric methods  
from aerial photographs taken 1956. Field checked 1958  
Revised from aerial photographs taken 1966. Field checked 1967  
Map edited 1968

Projection and 10,000-foot grid ticks: Texas coordinate  
system, south central zone (Lambert conformal conic)  
1000-meter Universal Transverse Mercator grid, zone 14  
1927 North American Datum  
To place on the projected North American Datum, 1983  
move the projection lines 20 meters south and  
20 meters east as shown by dashed corner ticks

Fine red dashed lines indicate selected fence and field lines  
generally visible on aerial photographs. This information is unclassified

UTM GRID AND 1983 MAGNETIC NORTH  
DECLINATION AT CENTER OF SHEET

SCALE 1:24 000

CONTOUR INTERVAL 10 FEET  
SUPPLEMENTARY CONTOUR INTERVALS 5 FEET  
NATIONAL GEODETIC VERTICAL DATUM OF 1929

QUADRANGLE LOCATION

TEXAS

2988-415

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS  
FOR SALE BY U. S. GEOLOGICAL SURVEY, DENVER, COLORADO 80226, OR RESTON, VIRGINIA 22092  
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

1988  
DMA 6343 II NE-SERIES V882

ROAD CLASSIFICATION

Primary highway, hard surface ..... Light-duty road, hard or improved surface .....  
Secondary highway, hard surface ..... Unimproved road .....  
Interstate Route U. S. Route State Route

Last revision date of the Recharge Zone Boundary for this Quadrangle Map: March 1974

Last revision date of the Recharge Zone Boundary for this Quadrangle Map: March 1974

1988  
REVISÉ 1994  
DMA 6343 II NE-SERIES V882  
SAN ANTONIO  
FEB 22 2002  
13



**ATTACHMENT "C"**  
**PROJECT DESCRIPTION**

RECEIVED

FEB 29 2012

COUNTY ENGINEER

This 8.05 acre site is located at 410 Oak Run Point in Comal County approximately 600 feet north of the intersection of Oak Run Point and State Highway 46. The site consists of two abutting platted lots with the first being Lot 1, Block 1 of Oakrun Commercial Reserve (5.00 Acres, per recorded plat), and Lot 1, Block 1 of Oak Run Commercial Reserve, Unit Three (3.239 Acres, per recorded plat). Due to the State Highway 46 improvements, a portion of Lot 1, Block 1 of Oakrun Commercial Reserve, Unit Three was removed from this tract and dedicated to the State, which leaves approximately 3.05 acres in this lot. Therefore, this Modification of an Approved Water Pollution Abatement Plan (WPAP) will consist of 8.05 acres, with the 5.00 acre tract currently being covered by an existing WPAP and the abutting 3.05 acres seeking approval per this Modification. The project site is located in the Blieder's Creek drainage basin but is not located in a FEMA 100 yr. flood plain according to FEMA FIRM Map 48091C0435F (effective 09/02/2009). The site generally drains from the southwest to northeast to a natural channel located along the eastern property line.

The purpose of this Modification is to expand the current project site and include the 3.05 acre lot adjacent to the existing 5.00 acre site currently under an approved WPAP. There is an existing church with associated parking located on the 5.00 ac. tract and the current impervious cover is 32%. The total approved impervious cover for the 5.00 acre tract, per the TCEQ approval letter, is 1.928 ac (39%), see TCEQ Approval Letter associated with TCEQ Form-0590 in this application. This impervious cover is being treated by a combination of an existing Vegetated Filter Strip and an on-line Enhanced Extended Detention Basin. The proposed impervious cover contributing to these existing Permanent Pollution Abatement Measures is 1.902 acres, which does not exceed the approved 1.928 acres of impervious cover previously approved. The additional impervious cover associated with the proposed improvements for the overall 8.05 site will be treated by Engineered Vegetative Filter Strips and a Partial Sedimentation/Filtration Basin which is summarized on the following page.

The following table summarizes the impervious cover areas and the corresponding BMP for a total Impervious Cover of 36.6% for the overall site:

IMPERVIOUS COVER DESCRIPTION	PERMANENT BEST MANAGEMENT PRACTICE
Roof/Buildings – 28,546 sf Pavement & Sidewalks – 54,308 sf Impervious Cover = 82,854 sf (1.902 Ac.)  Total Approved Impervious Cover = 1.928 Ac. (Per Enclosed TCEQ Approval Letter)  Impervious Cover contributing to the existing/approved BMP's = <u>1.902 Ac.</u> , which is less than the approved 1.928 Ac.	Existing Vegetative Filter Strip and On-line Enhanced Extended Detention Basin (per enclosed TCEQ Approval Letter)
Roof/Buildings - 3,926 sf Pavement & Sidewalks - 11,340 sf Impervious Cover = 15,266 sf	Proposed - Partial Sedimentation/Filtration Basin
Pavement & Sidewalks - 30,134 sf	Proposed – Engineered Vegetative Filter Strip
Total Impervious Cover included in this 8.05 ac. Plan = 128,254 sf (2.944 Acres) (36.6%)	

# **GEOLOGIC SITE ASSESSMENT**

**PREPARED BY**

**FROST GEOSCIENCES**

**FOR**

**FREEDOM FELLOWSHIP CHURCH**



***Geologic Site Assessment (WPAP)***  
***for Regulated Activities / Development***  
***on the Edwards Aquifer Recharge / Transition Zone***

***Freedom Fellowship Church***  
***State Hwy 46 and Oak Run Point***  
***New Braunfels, Texas***

***FROST GEOSCIENCES CONTROL # FGS-E11230***

***December 30, 2011***

***Prepared exclusively for***

**RECEIVED**

**FEB 29 2012**

**COUNTY ENGINEER**

***Freedom Fellowship Church***  
***410 Oak Run Point***  
***New Braunfels, Texas 78132***

***Frost GeoSciences***  
***Geotechnical ▪ Construction Materials***  
***Forensics ▪ Environmental***

**13402 Western Oak • Helotes, Texas 78023 • Phone: (210) 372-1315 • Fax: (210) 372-1318**



**Frost GeoSciences**  
Geotechnical • Construction Materials  
Forensics • Environmental

13402 Western Oak  
Helotes, Texas 78023  
Phone (210) 372-1315  
Fax (210) 372-1318

SDVOSB VBE DIBE SBE  
www.frostgeosciences.com  
TBPE Firm Registration # F-9227  
TBPG Firm Registration # 50040

December 30, 2011

Freedom Fellowship Church  
410 Oak Run Point  
New Braunfels, Texas 78132

Attn: Mr. James Gallaher

Re: Geologic Site Assessment (WPAP)  
for Regulated Activities / Development on the  
Edwards Aquifer Recharge / Transition Zone  
Freedom Fellowship Church  
State Hwy 46 and Oak Run Pkwy  
New Braunfels, Texas

Frost GeoSciences, Inc. Control # FGS-E11230

Dear Sir:

Attached is a copy of the Geologic Assessment Report completed for the above referenced project site as it relates to 30 TAC §213.5(b)(3), effective June 1, 1999. Our investigation was conducted and this report was prepared in general accordance with the "Instructions to Geologists", TCEQ-0585-Instructions (Rev. 10-1-04). The results of our investigation, along with any recommendations for Best Management Practices (BMP's), are provided in the following report.

If you have any questions regarding this report, or if Frost GeoSciences, Inc. may be of additional assistance to you on this project, please feel free to call our office. It has been a pleasure to work with you and we wish to thank you for the opportunity to be of service to you on this project. We look forward to being of continued service.



Sincerely,  
Frost GeoSciences, Inc.

A handwritten signature in cursive script that reads "Steve Frost".

Steve Frost, C.P.G., P.G.  
President, Senior Geologist

Distribution: (1) Freedom Fellowship Church  
(5) Pawelek & Moy, Inc.

## Table of Contents

GEOLOGIC ASSESSMENT FORM .....	1
STRATIGRAPHIC COLUMN .....	3
GEOLOGIC ASSESSMENT TABLE .....	4
LOCATION .....	5
METHODOLOGY .....	5
RESEARCH & OBSERVATIONS .....	6
7.5 Minute Quadrangle Map Review .....	6
Recharge/Transition Zone .....	6
100-Year Floodplain .....	7
Soils .....	7
Narrative Description of the Site Geology .....	8
BEST MANAGEMENT PRACTICES .....	10
DISCLAIMER .....	10
REFERENCES .....	11
APPENDIX	
A:    Site Location Plates	
Plate 1:    Site Plan	
Plate 2:    Street Map	
Plate 3:    USGS Topographic Map	
Plate 4:    Official Edwards Aquifer Recharge Zone Map	
Plate 5:    FEMA Flood Map	
Plate 6:    1973 Aerial Photograph, 1"=500'	
Plate 7:    Geologic Map	
Plate 8:    2009 Aerial Photograph, 1"=500'	
Plate 9:    2009 Aerial Photograph with PRF's, 1"=200'	
B:    Site Inspection Photographs	
C:    Site Geologic Map	

**Geologic Assessment**  
For Regulated Activities  
on The Edwards Aquifer Recharge/transition Zones  
and Relating to 30 TAC §213.5(b)(3), Effective June 1, 1999

REGULATED ENTITY NAME: Freedom Fellowship Church

TYPE OF PROJECT: ☒ WPAP    ☐ AST    ☐ SCS    ☐ UST

LOCATION OF PROJECT: ☒ Recharge Zone    ☐ Transition Zone    ☐ Contributing Zone within the Transition Zone

**PROJECT INFORMATION**

1. ☒ Geologic or manmade features are described and evaluated using the attached **GEOLOGIC ASSESSMENT TABLE**.
2. Soil cover on the project site is summarized in the table below and uses the SCS Hydrologic Soil Groups\* (*Urban Hydrology for Small Watersheds, Technical Release No. 55, Appendix A, Soil Conservation Service, 1986*). If there is more than one soil type on the project site, show each soil type on the site Geologic Map or a separate soils map.

Soil Units, Infiltration Characteristics & Thickness		
Soil Name	Group*	Thickness (feet)
Rumple-Comfort Association	C/D	1 to 2

**\* Soil Group Definitions (Abbreviated)**

- A. Soils having a high infiltration rate when thoroughly wetted.
- B. Soils having a moderate infiltration rate when thoroughly wetted.
- C. Soils having a slow infiltration rate when thoroughly wetted.
- D. Soils having a very slow infiltration rate when thoroughly wetted.

3. ☒ A **STRATIGRAPHIC COLUMN** is attached at the end of this form that shows formations, members, and thicknesses. The outcropping unit should be at the top of the stratigraphic column.
4. ☒ A **NARRATIVE DESCRIPTION OF SITE SPECIFIC GEOLOGY** is attached at the end of this form. The description must include a discussion of the potential for fluid movement to the Edwards Aquifer, stratigraphy, structure, and karst characteristics of the site.
5. ☒ Appropriate **SITE GEOLOGIC MAP(S)** are attached:

The Site Geologic Map must be the same scale as the applicant's Site Plan. The minimum scale is 1" : 400'

Applicant's Site Plan Scale	1" = <u>40</u> '
Site Geologic Map Scale	1" = <u>40</u> '
Site Soils Map Scale (if more than 1 soil type)	1" = <u>500</u> '

6. Method of collecting positional data:



- ☒ Global Positioning System (GPS) technology.  
☒ Other method(s): 2009 Aerial Photograph
7. ☒ The project site is shown and labeled on the Site Geologic Map.
8. ☒ Surface geologic units are shown and labeled on the Site Geologic Map.
9. ☒ Geologic or manmade features were discovered on the project site during the field investigation. They are shown and labeled on the Site Geologic Map and are described in the attached Geologic Assessment Table.  
☐ Geologic or manmade features were not discovered on the project site during the field investigation.
10. ☒ The Recharge Zone boundary is shown and labeled, if appropriate.
11. All known wells (test holes, water, oil, unplugged, capped and/or abandoned, etc.):  
☐ There are \_\_\_ (#) wells present on the project site and the locations are shown and labeled. (Check all of the following that apply.)  
☐ The wells are not in use and have been properly abandoned.  
☐ The wells are not in use and will be properly abandoned.  
☐ The wells are in use and comply with 16 TAC Chapter 76.  
☒ There are no wells or test holes of any kind known to exist on the project site.

**ADMINISTRATIVE INFORMATION**

12. ☒ Submit one (1) original and one (1) copy of the application, plus additional copies as needed for each affected incorporated city, groundwater conservation district, and county in which the project will be located. The TCEQ will distribute the additional copies to these jurisdictions. The copies must be submitted to the appropriate regional office.

Date(s) Geologic Assessment was performed: November 21, 2011  
Date(s)

To the best of my knowledge, the responses to this form accurately reflect all information requested concerning the proposed regulated activities and methods to protect the Edwards Aquifer. My signature certifies that I am qualified as a geologist as defined by 30 TAC Chapter 213.

Steve Frost, C.P.G., P.G.  
Print Name of Geologist

*Steve Frost*  
Signature of Geologist



(210) 372-1315  
Telephone

(210) 372-1318  
Fax

December 30, 2011  
Date

Representing: Frost GeoSciences, Inc.  
(Name of Company)

If you have questions on how to fill out this form or about the Edwards Aquifer protection program, please contact us at 210/490-3096 for projects located in the San Antonio Region or 512/339-2929 for projects located in the Austin Region.

Individuals are entitled to request and review their personal information that the agency gathers on its forms. They may also have any errors in their information corrected. To review such information, contact us at 512/239-3282.



## Stratigraphic Column

[Hydrogeologic subdivisions modified from Maclay and Small (1976); groups, formations, and members modified from Rose (1972); lithology modified from Dunham (1962); and porosity type modified from Choquette and Pray (1970). CU, confining unit; AQ, aquifer]

Hydrogeologic subdivision		Group, formation, or member	Hydro-logic function	Thickness (feet)	Lithology	Field identification	Cavern development	Porosity/permeability type			
Upper Cretaceous	Upper confining units	Eagle Ford Group	CU	30 – 50	Brown, flaggy shale and argillaceous limestone	Thin flagstones; petroliferous	None	Primary porosity lost/ low permeability			
		Buda Limestone	CU	40 – 50	Buff, light gray, dense mudstone	Porcelaneous limestone with calcite-filled veins	Minor surface karst	Low porosity/low permeability			
		Del Rio Clay	CU	40 – 50	Blue-green to yellow-brown clay	Fossiliferous; <i>Ilumatogyra arietina</i>	None	None/primary upper confining unit			
Lower Cretaceous	I	Edwards aquifer	Edwards Group	Person Formation	Georgetown Formation	Karst AQ; not karst CU	2 - 20	Reddish-brown, gray to light tan marly limestone	Marker fossil: <i>Waconella wacoensis</i>	None	Low porosity/low permeability
	II				Cyclic and marine members, undivided	AQ	80 – 90	Mudstone to packstone; <i>miliolid</i> grainstone; chert	Thin graded cycles; massive beds to relatively thin beds; crossbeds	Many subsurface; might be associated with earlier karst development	Laterally extensive; both fabric and not fabric/water-yielding
	III				Leached and collapsed members, undivided	AQ	70 – 90	Crystalline limestone; mudstone to grainstone; chert; collapsed breccia	Bioturbated iron-stained beds separated by massive limestone beds; stromatolitic limestone	Extensive lateral development; large rooms	Majority not fabric/one of the most permeable
	IV				Regional dense member	CU	20 – 24	Dense, argillaceous mudstone	Wispy iron-oxide stains	Very few; only vertical fracture enlargement	Not fabric/low permeability; vertical barrier
	V				Grainstone member	AQ	50 – 60	<i>Miliolid</i> grainstone; mudstone to wackestone; chert	White crossbedded grainstone	Few	Not fabric/ recrystallization reduces permeability
	VI				Kirschberg evaporite member	AQ	50 – 60	Highly altered crystalline limestone; chalky mudstone; chert	Boxwork voids, with neospar and travertine frame	Probably extensive cave development	Majority fabric/one of the most permeable
	VII				Dolomitic member	AQ	110 – 130	Mudstone to grainstone; crystalline limestone; chert	Massively bedded light gray, <i>Toucasia</i> abundant	Caves related to structure or bedding planes	Mostly not fabric; some bedding plane-fabric/water-yielding
	VIII				Basal nodular member	Karst AQ; not karst CU	50 – 60	Shaly, nodular limestone; mudstone and <i>miliolid</i> grainstone	Massive, nodular and mottled, <i>Exogyra texana</i>	Large lateral caves at surface; a few caves near Cibolo Creek	Fabric; stratigraphically controlled/large conduit flow at surface; no permeability in subsurface
		Lower confining unit	Upper member of the Glen Rose Limestone	CU; evaporite beds AQ	350 – 500	Yellowish tan, thinly bedded limestone and marl	Stair-step topography; alternating limestone and marl	Some surface cave development	Some water production at evaporite beds/relatively impermeable		

[illegible]

## LOCATION

The project site consists of 8.05 acres of land located along and north of State Highway 46 near the northeastern corner of the intersection of State Highway 46 and Oak Run Point in New Braunfels, Texas. An overall view of the area is shown on copies of the site plan, a street map, the USGS Topographic Map, the Official Edwards Aquifer Recharge Zone Map, the Flood Insurance Rate Map (FIRM), a 1973 aerial photograph at a scale of 1"=500', a geologic map, a 2009 aerial photograph at a scale of 1"=500', and a 2009 aerial photograph at a scale of 1"=200'. Plates 1 through 9 in Appendix A.

## METHODOLOGY

The Geologic Assessment was performed by Mr. Steve Frost, C.P.G., President and Senior Geologist with Frost GeoSciences, Inc. Mr. Frost is a Licensed Professional Geoscientist in the State of Texas (License # 315) and is a Certified Professional Geologist with the American Institute of Professional Geologist (Certification # 10176).

Frost GeoSciences, Inc. researched the geology of the area in the immediate vicinity of the project site. The research included, but was not limited to, the Geologic Atlas of Texas, San Antonio Sheet, FIRM maps, Edwards Aquifer Recharge Zone Maps, USGS 7.5 Minute Quadrangle Maps, the Geologic Map of the New Braunfels, Texas 30 X 60 Minute Quadrangle, the USGS Water-Resources Investigations Report 94-4117, and the USDA Soil Survey of Comal & Hays County, Texas.

After reviewing the available information, a field investigation was performed to identify any geologic or man-made potential recharge features. A transect spacing of approximately 50 feet or less, depending on vegetation thickness, was used to inspect the project site. A 2009 aerial photograph, in conjunction with a hand held Garmin eTrex Summit Global Positioning System with an Estimated Potential Error ranging from 7 to 10 feet, was used to navigate around the property and identify the locations of potential recharge features, as recommended in the "Instructions to Geologists",



TCEQ-0585-Instructions (Rev. 10-1-04). The locations of any potential recharge features noted in the field were identified with blue and white flagging. The flagging is numbered with the same potential recharge feature I.D. # that is used on the Site Geologic Map in Appendix C of this report. The Site Geologic Map indicating the limits of the project site is included in Appendix C. A copy of a 2009 aerial photograph at an approximate scale of 1"=200', indicating the locations of the potential recharge features, is included on Plate 9 in Appendix A. The Geologic Assessment Form (Rev. 10-01-10), Stratigraphic Column and the Geologic Assessment Table have been filled with the appropriate information for this project site and are included on pages 1-4 of this report.

## **RESEARCH & OBSERVATIONS**

### **7.5 Minute Quadrangle Map Review**

According to the USGS 7.5 Minute Quadrangle Map, New Braunfels West, Texas Sheet (1988), the elevation of the project site ranges from 820 feet in the northeastern portion of the project site to 840 feet in the western portion of the site. These elevations are calculated above mean sea level (AMSL). Overall, the surface runoff from the project site flows to the east into Blieders Creek Tributary #6. An overhead utility easement is located through the northern portion of the project site. State Highway 46 is located immediately south of the project site. Oak Run Point is located west of the project site. A copy of the above referenced USGS 7.5 Minute Quadrangle Map indicating the location of the project site, is included in this report on Plate 3 in Appendix A.

### **Recharge / Transition Zone**

According to the Official Edwards Aquifer Recharge Zone Map, New Braunfels West, Texas Sheet (1996), the project site is located within the Recharge Zone of the Edwards Aquifer. A copy of the Official Edwards Aquifer Recharge Zone Map, New Braunfels West, Texas Sheet (1996), indicating the location of the project site, is included on Plate 4 in Appendix A.



### 100-Year Floodplain

The Federal Emergency Management Agency (FEMA) Flood Insurance Rate Map for Comal County, Texas, Community Panel Number 48091C0435F (Revised 9/02/09) was reviewed to determine if the project site is located in areas prone to flooding. A review of the above-mentioned panel indicates that no portion of the project site is located within the 100 year floodplain. The project site is located within Zone X. According to the panel legend, Zone X represents areas determined to be outside the 0.2% annual chance floodplain. A copy of the Comal County, Texas, FIRM map, indicating the location of the project site, is included in this report on Plate 5 in Appendix A.

### Soils

According to the United States Department of Agriculture, Soil Conservation Service, Soil Survey of Comal & Hays County, Texas (1982), the project site is located on the Rumble-Comfort Association (RUD). A copy of the 1973 aerial photograph (approximate scale: 1"=500') from the USDA Soil Survey of Comal & Hays County, Texas indicating the location of the project site and the soil types is included on Plate 6 in Appendix A.

The Rumble-Comfort Association (RUD) consists of shallow and moderately deep soils on uplands in the Edwards Plateau Land Resource Area. The surface layer of the Rumble Soil is dark reddish brown very cherty clay loam about 10 inches thick. Rounded chert and limestone cobbles and gravel cover about 20 percent of the surface. The subsoil to a depth of 14 inches is dark reddish-brown very cherty clay, and to a depth of 28 inches it is dark reddish-brown extremely stony clay. The underlying material is indurated fractured limestone. The Comfort Soil is dark brown, neutral, extremely stony clay about 7 inches thick. The subsoil to a depth of 12 inches is dark reddish-brown, mildly alkaline, extremely stony clay. The underlying material is indurated fractured limestone. The soil is noncalcareous throughout. The soils in this association are well drained. Surface runoff is medium, but varies due to the occurrence of caves, fracture zones, and sinks. Permeability is moderately slow. Water erosion is a moderate hazard.

### **Narrative Description of the Site Geology**

The project site consists of 8.05 acres of partially developed land located at 411 Oak Run Point in New Braunfels, Texas. The northern 5 acres of the site is mostly developed with an existing church and associated parking areas. Based on a visual inspection of the ground surface the overall potential for fluid flow from the project site into the Edwards Aquifer appears to be low.

One Potential Recharge Feature was identified during our research of the property and site inspection. The following is a summary of the feature noted during our assessment.

Potential Recharge Feature # S-1 consists of an inferred fault noted on the USGS Geologic Map for Comal County, Texas (WRI 94-4117). This fault was also listed as inferred south of State Highway 46 on the Bureau of Economic Geology, Geologic Map of the New Braunfels, Texas 30 X 60 Minute Quadrangle. No evidence of this fault was noted on the project during the site visit. Frost GeoSciences, Inc., rates the relative infiltration of this feature as low on figure 1 of the TCEQ-0585-Instructions (Rev. 10-01-04). This feature scores a 27 on the sensitivity scale, column 10 in the Geologic Assessment Table on page 4 of this report. FGS is of the opinion that this is not a sensitive feature.

The northern portion of the project site is covered by an existing church with associated parking areas and open mowed grassy areas with sparse vegetative cover. The southern portion of the project site is covered by a sparse to moderate stand of vegetative cover with isolated areas of dense ash juniper and cactus. The overall vegetative cover on the project site consists of Ashe juniper (*Juniperus ashei*), Live Oak (*Quercus virginiana*) and Texas Persimmon (*Diospyros texana*) with Hackberry (*Celtis sp.*), mesquite, prickly pear cactus, and native grasses. The variations in the vegetative cover across the project site are visible in the 2009 aerial photographs on Plates 8 and 9 in Appendix A and in the site visit photographs included in Appendix B.

According to the USGS 7.5 Minute Quadrangle Map, New Braunfels West, Texas Sheet (1988), the elevation of the project site ranges from 820 to 840 feet. These elevations are calculated above mean sea level (AMSL). According to topographic data obtained from Pawelek & Moy Engineers, the elevations on the project site ranges from 813 feet at the

northeastern portion of the site to 838 feet at the western property boundary. A copy of the site plan, indicating the boundary of the project site and the elevations, is included on Plate 1 in Appendix A and on the Site Geologic Map in Appendix C of this report.

According to the Bureau of Economic Geology, Geologic Map of the New Braunfels, Texas 30 X 60 Minute Quadrangle (2000), the project site is covered by the Cretaceous Edwards Person Limestone. Based on our site inspection FGS is of the opinion that the project site is located on the Leached and Collapsed Member of the Edwards Person Limestone. According to the USGS WRI 94-4117 Geologic Map of Comal County, Texas, a fault is located through the southeastern tip of the project site. This fault displaces the Leached and Collapsed Member of the Person Limestone to the west against the Cyclic and Marine Member of the Person Limestone to the east. Due to soil cover and vegetative cover in the area, no evidence of this fault was noted on the project site.

The Cyclic and Marine Member of the Cretaceous Edwards Person Limestone consists of mudstone to packstone and miliolid grainstone with chert. The member is characterized by massive beds of limestone to relatively thin beds of limestone with some crossbedding. The Cyclic and Marine Member forms a few caves some that are laterally extensive. Overall thickness ranges from 80 to 90 feet thick.

The Leached and Collapsed Member of the Edwards Person Limestone consists of crystalline limestone, mudstone to grainstone with chert, and collapsed breccia. This member is stromatolitic limestone. The Leached and Collapsed Member is characterized by bioturbated iron stained beds separated by massive limestone beds. This member is typically one of the most permeable and has extensive lateral development with large rooms. Overall thickness ranges from 70 to 90 feet thick.

A copy of the Bureau of Economic Geology, Geologic Map of the New Braunfels, Texas 30 X 60 Minute Quadrangle (2000), indicating the location of the project site, is included on Plate 7a in Appendix A. A copy of the U.S.G.S. WRI 94-4117 Geologic Map of Comal County, Texas, indicating the location of the project site, is included on Plate 7b in Appendix A.



### **BEST MANAGEMENT PRACTICE (BMP)**

Based on a visual inspection of the ground surface the overall potential for fluid flow from the project site into the Edwards Aquifer appears to be low. The potential always exists to encounter subsurface features that lack a surface expression. Frost GeoSciences, Inc. recommends that construction personnel be informed of the potential to encounter subsurface karst features during excavating activities. Construction personnel should also be informed of the proper protocol to follow in the event that a solution cavity and/or cave is encountered during the excavation and development of the property.

### **DISCLAIMER**

This report has been prepared in general accordance with the "Instructions to Geologists", TCEQ-0585-Instructions (Rev. 10-1-04) by a Licensed Texas Professional Geoscientist. All areas of the project site were carefully inspected for features that could contribute to the recharge of the Edwards Aquifer, however, this survey cannot preclude the presence of subsurface karst features that lack surface expression. This report is not intended to be a definitive investigation of all possible geologic or karst features at this site. All conclusions, opinions and recommendations for Best Management Practices (BMP's) in this report are based on information obtained while researching the project and on the site conditions at the time of our field investigation.

This report has been prepared for and may be relied upon by Freedom Fellowship Church and Pawelek & Moy Engineers. This report is based on available known records, a visual inspection of the project site and the work generally accepted for a Geologic Assessment TAC §213.5(b)(3), effective June 1, 1999.




## REFERENCES

- 1) USGS 7.5 Minute Quadrangle Map. New Braunfels West, Texas Sheet (1988).
- 2) Official Edwards Aquifer Recharge Zone Map. New Braunfels West, Texas Sheet (1996).
- 3) Stein, W.G. and Ozuna, G.B., 1995. Geologic Framework and Hydrogeologic Characteristics of the Edwards Aquifer Recharge Zone, Comal County, Texas. U.S. Geological Survey Water Resources Investigations 94-4117.
- 4) Collins, Edward, W., 2000. Geologic Map of the New Braunfels, Texas 30 X 60 Minute Quadrangle.
- 5) Federal Emergency Management Agency (FEMA), Bexar County, Texas and Incorporated Areas, Flood Insurance Rate Map (FIRM), Panel 48091C04351F (9/02/09) FEMA, Washington D.C.
- 7) USDA Soil Conservation Service, Soil Survey of Comal & Hays Counties, Texas (1982).
- 8) TCEQ-0585-Instructions (Rev. 10-1-04). "Instructions to Geologists for Geologic Assessments on the Edwards Aquifer Recharge/Transition Zone".

# Appendix A

Site Location Plates

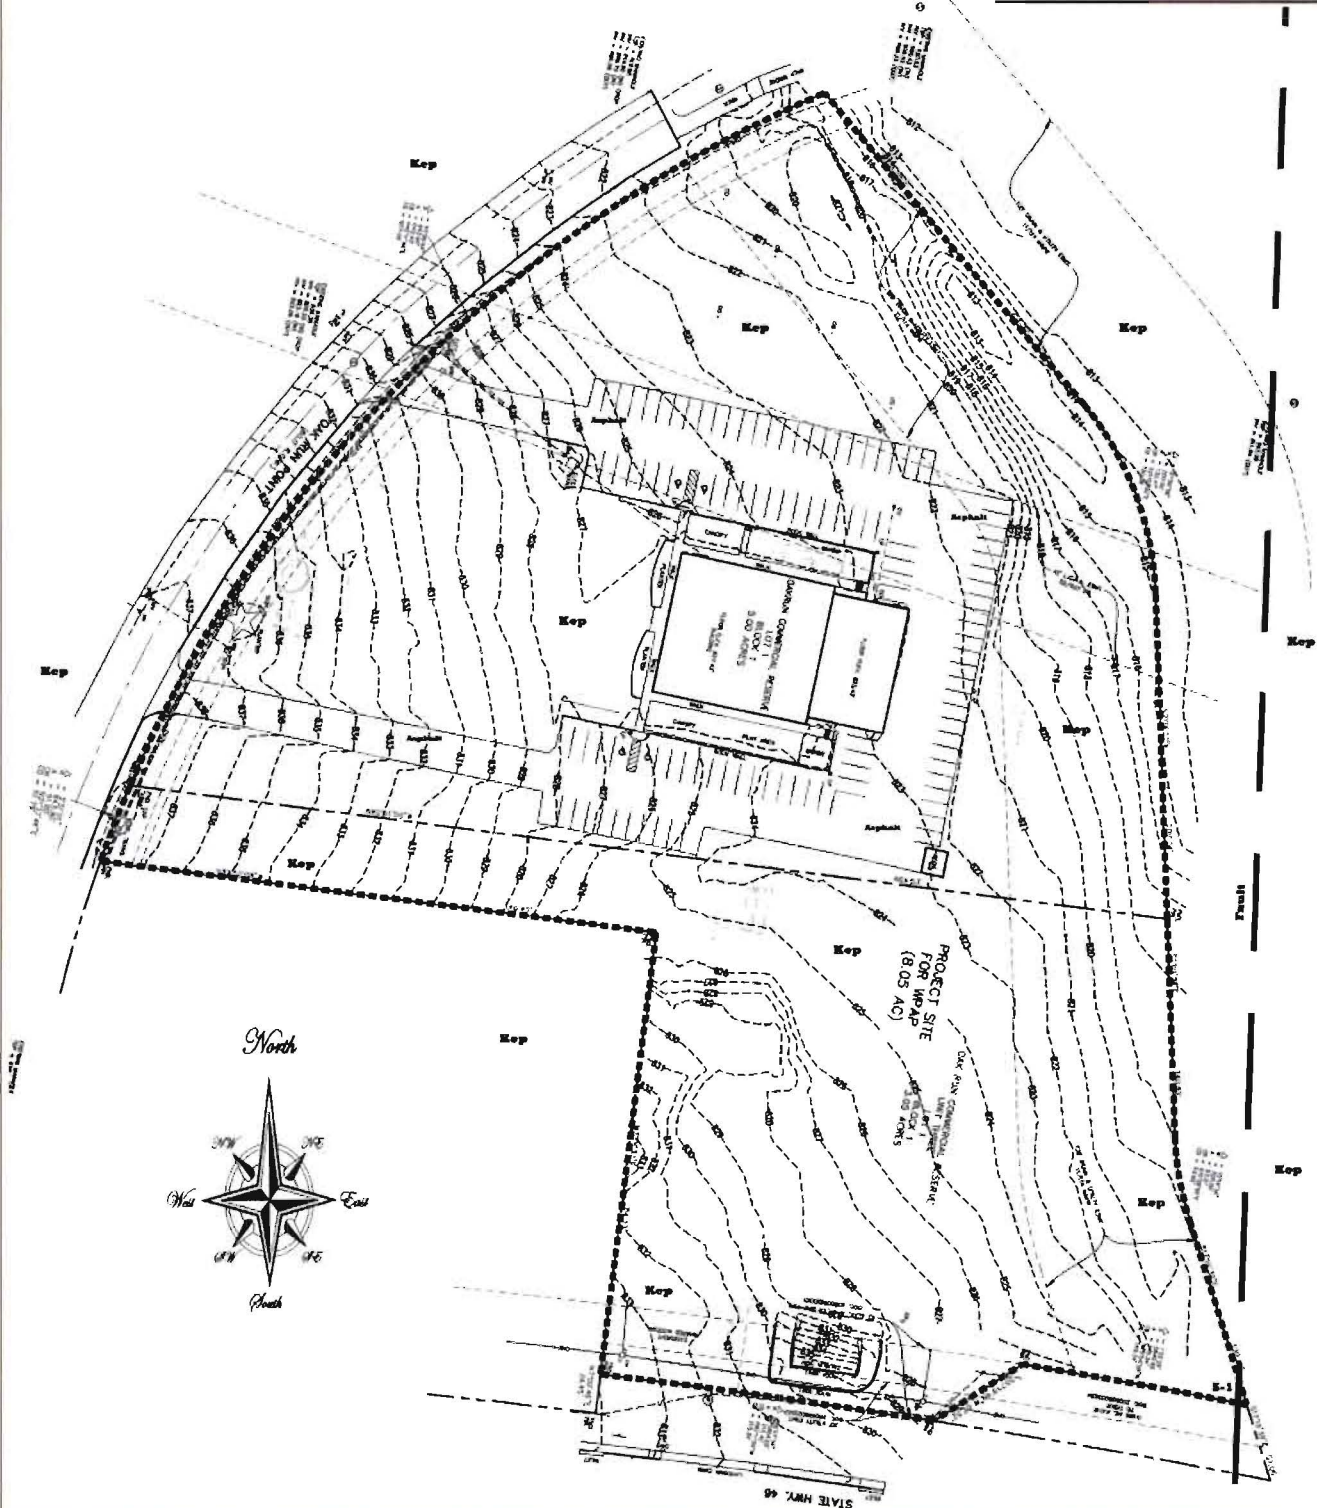

**PROJECT NAME:**

Geologic Site Assessment (WPAP)  
for Regulated Activities / Development on the  
Edwards Aquifer Recharge / Transition Zone  
Freedom Fellowship Church  
New Braunfels, Texas


**Site Plan**

**PROJECT NO.:**

FGS-E11230

**DATE:**

December 30, 2011

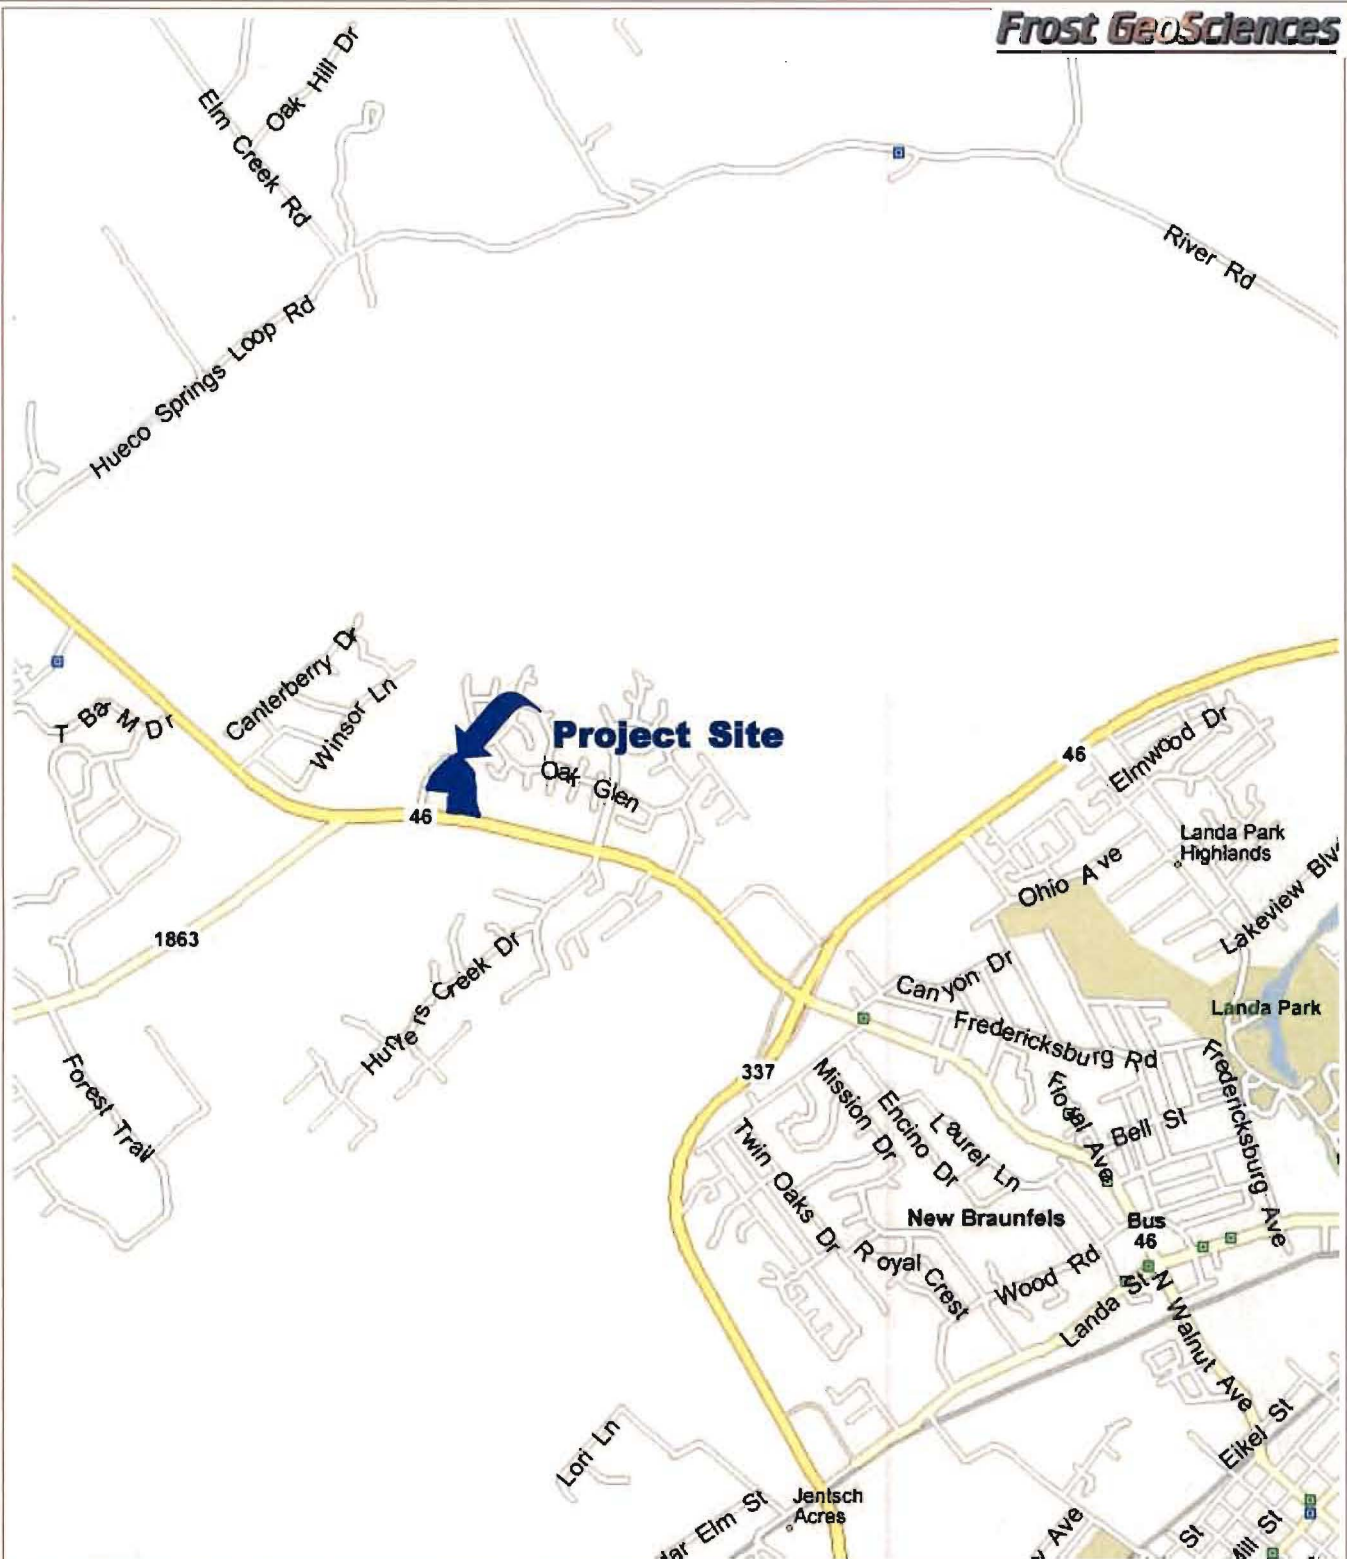

**PROJECT NAME:**

Geologic Site Assessment (WPAP)  
for Regulated Activities / Development on the  
Edwards Aquifer Recharge / Transition Zone  
Freedom Fellowship Church  
New Braunfels, Texas

**Street Map**


**PROJECT NO.:**

FGS-E11230

**DATE:**

December 30, 2011



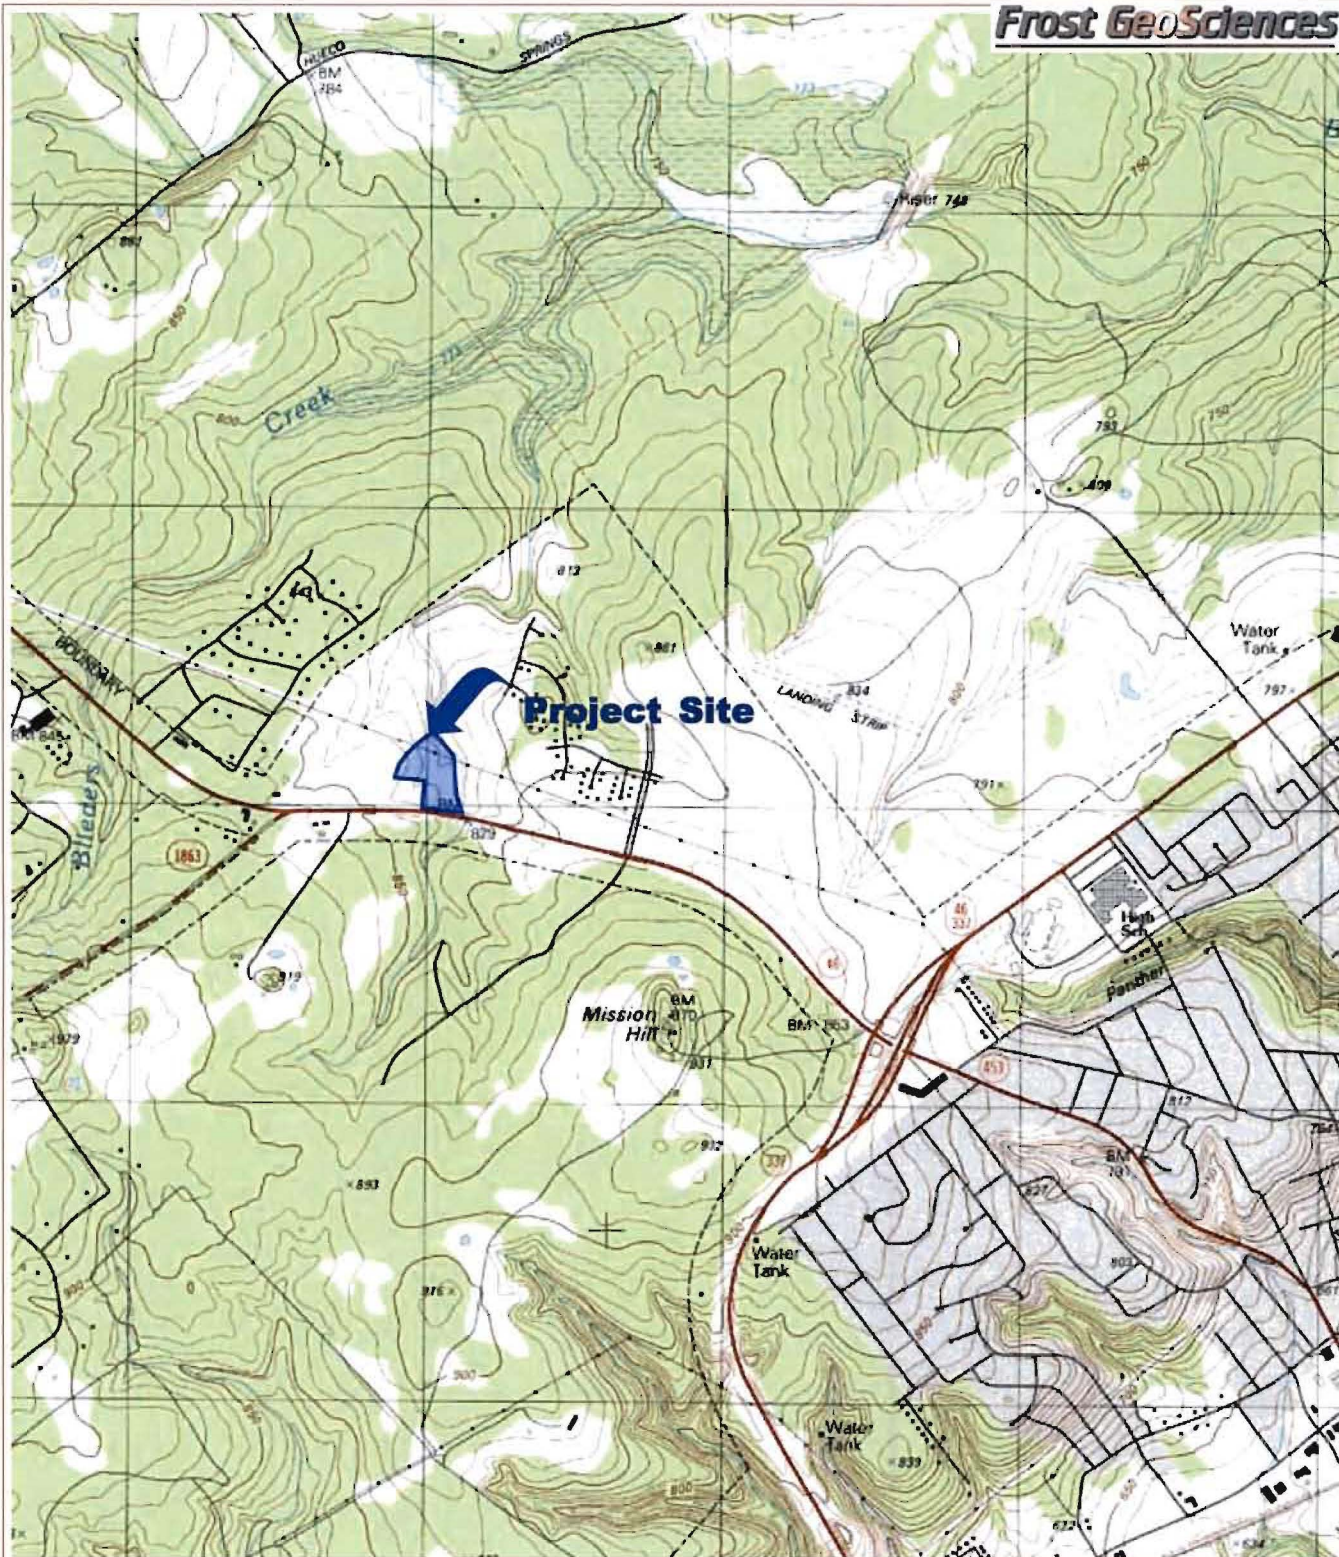

**PROJECT NAME:**

Geologic Site Assessment (WPAP)  
for Regulated Activities / Development on the  
Edwards Aquifer Recharge / Transition Zone  
Freedom Fellowship Church  
New Braunfels, Texas

U.S.G.S. 7.5 Minute Quadrangle Map  
New Braunfels West, Texas Sheet (1988)


**PROJECT NO.:**

FGS-E11230

**DATE:**

December 30, 2011



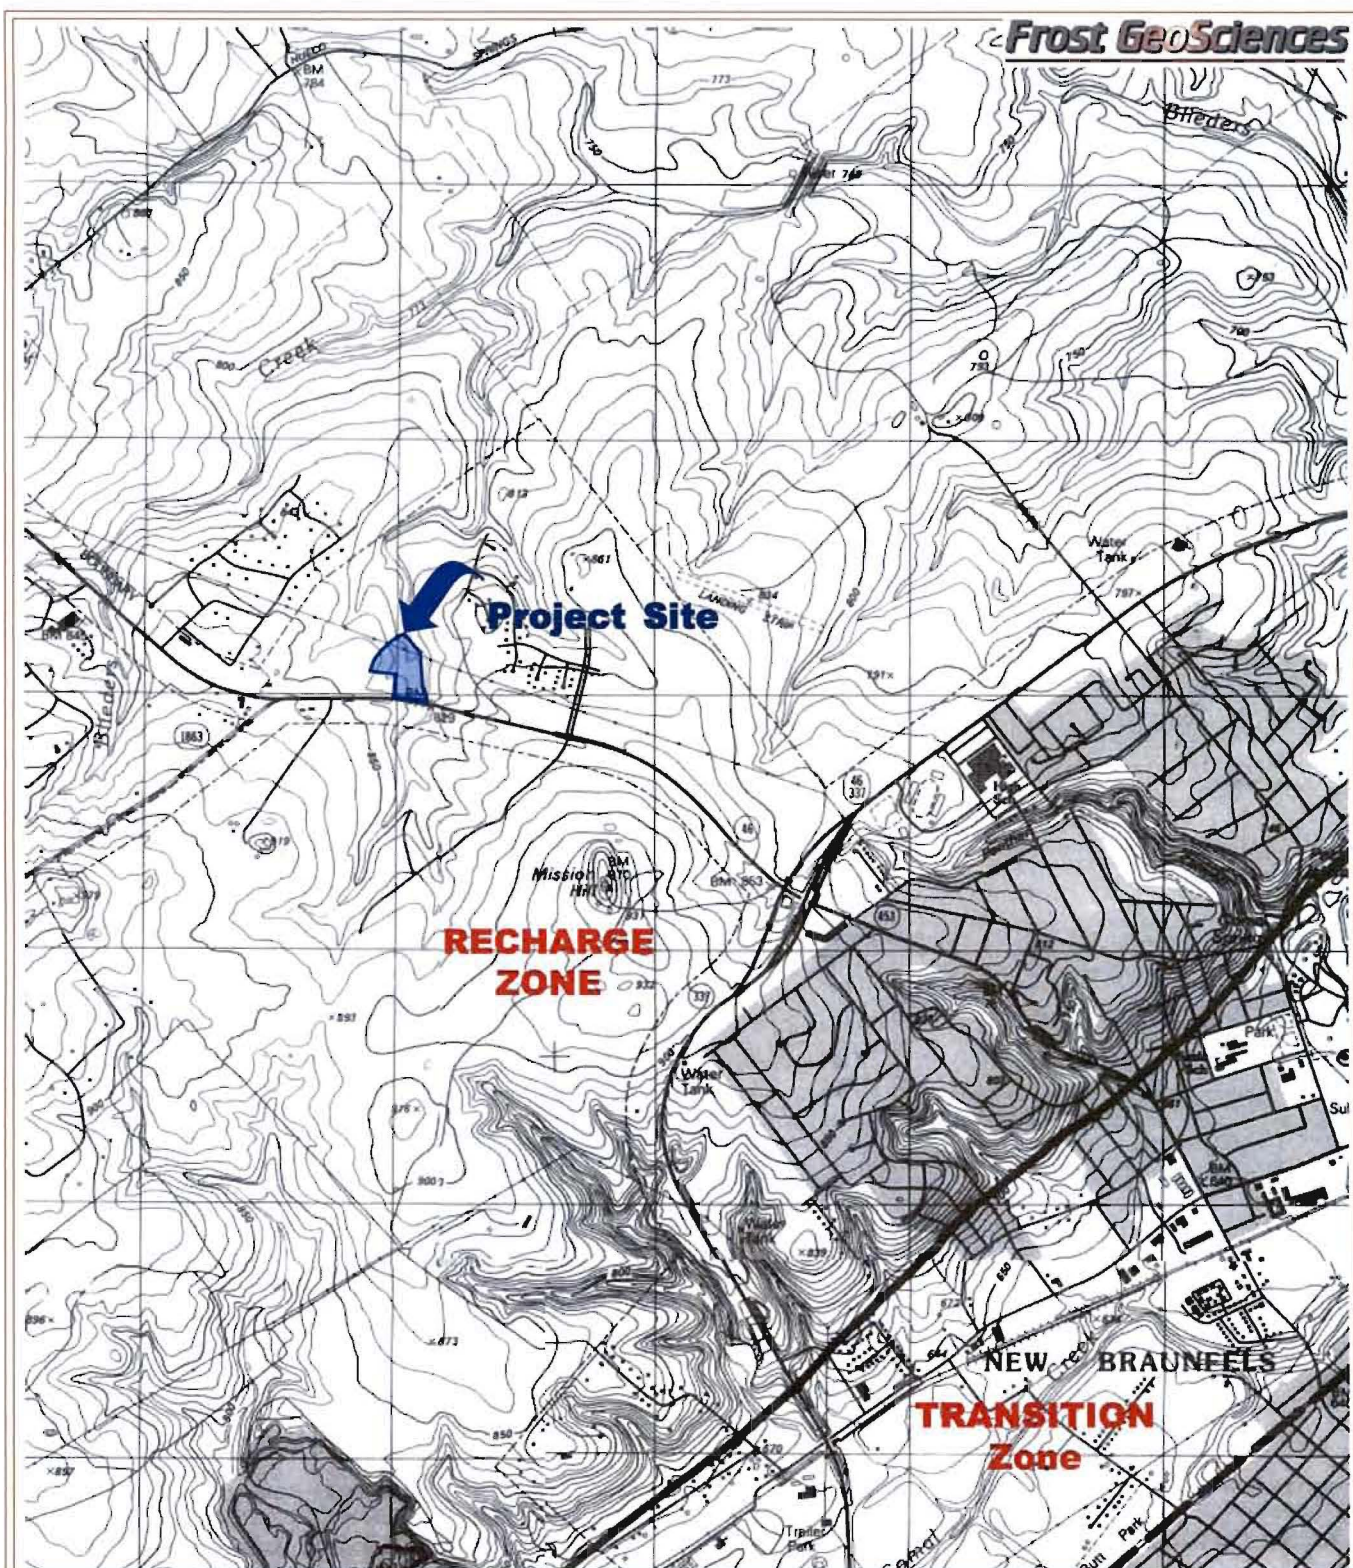

**PROJECT NAME:**

Geologic Site Assessment (WPAP)  
for Regulated Activities / Development on the  
Edwards Aquifer Recharge / Transition Zone  
Freedom Fellowship Church  
New Braunfels, Texas

Official Edwards Aquifer Recharge Zone Map  
New Braunfels West, Texas Sheet (1996)


**PROJECT NO.:**

FGS-E11230

**DATE:**

December 30, 2011



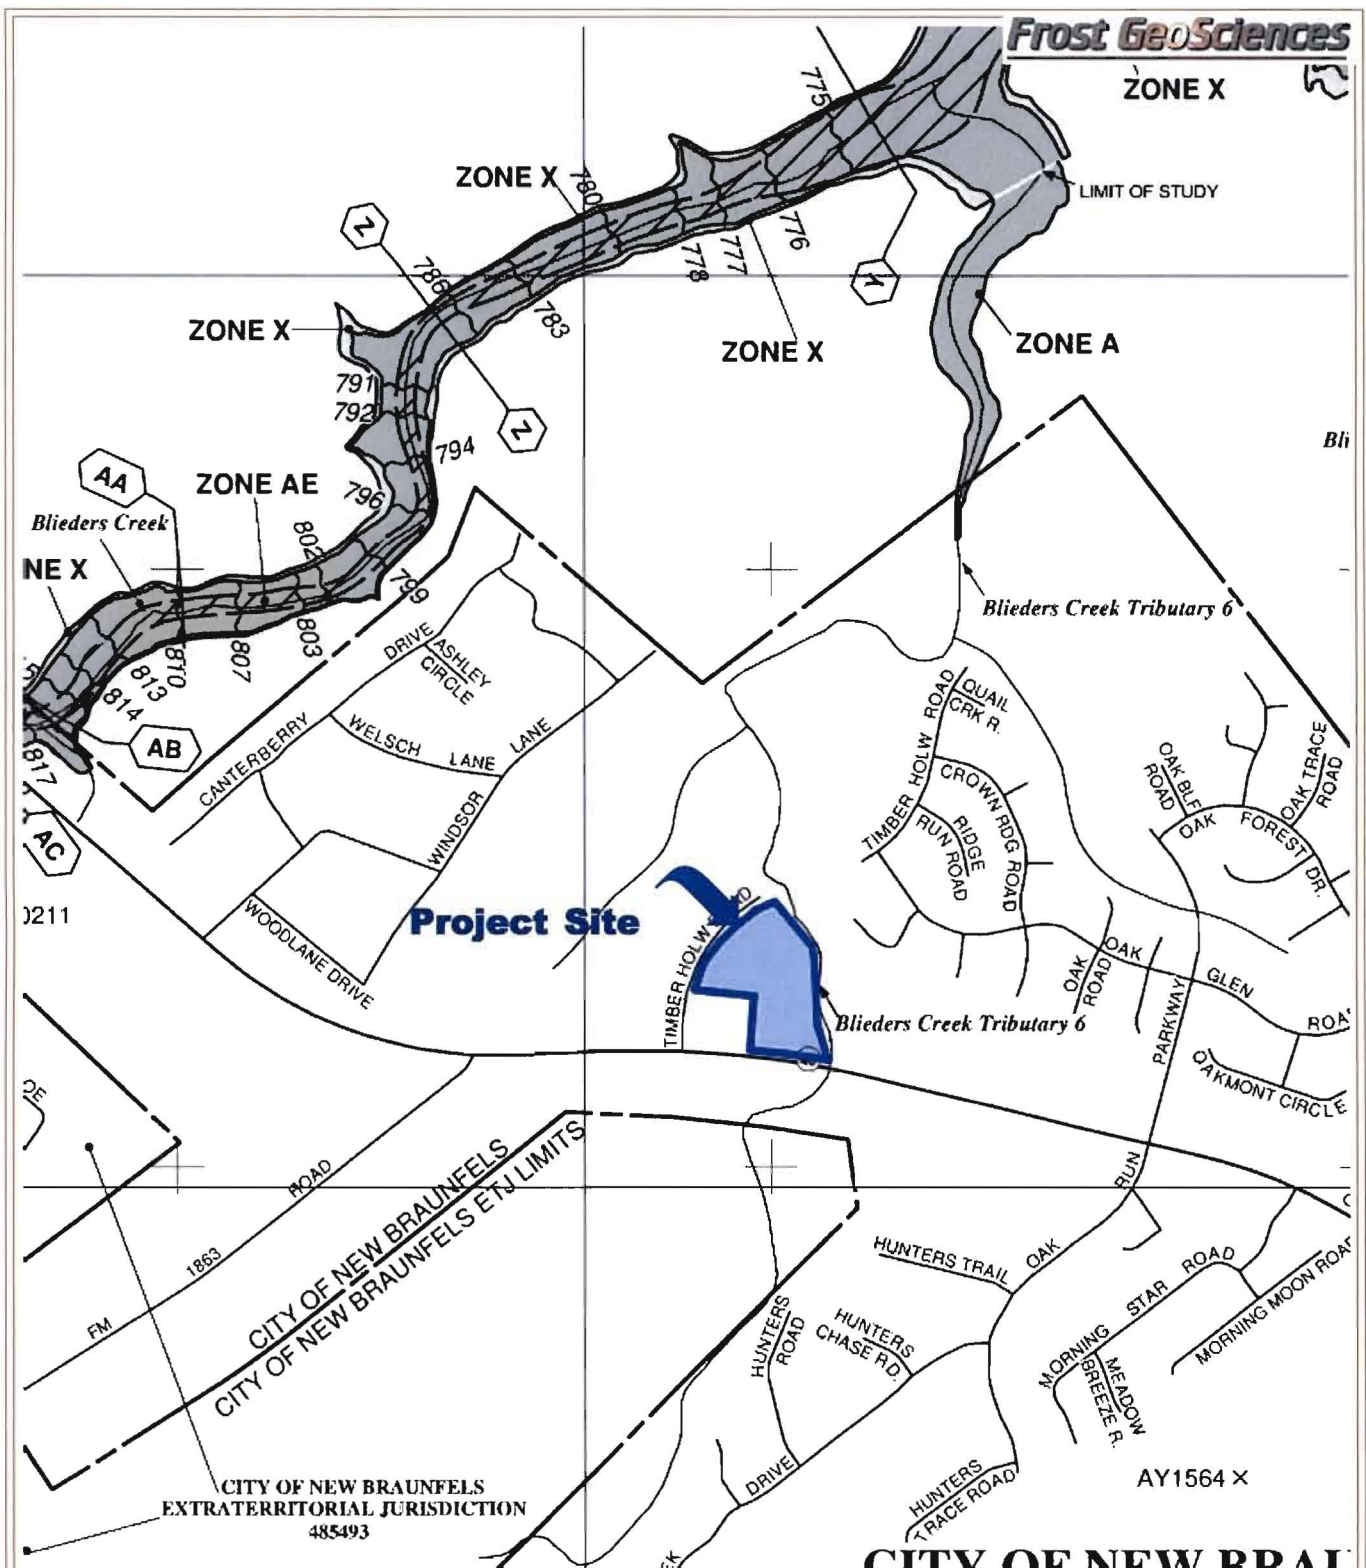

**PROJECT NAME:**

Geologic Site Assessment (WPAP)  
for Regulated Activities / Development on the  
Edwards Aquifer Recharge / Transition Zone  
Freedom Fellowship Church  
New Braunfels, Texas

**Flood Insurance Rate Map (FIRM)**

Community Panel # 48091C0435F  
(Revised 9/02/09)


**PROJECT NO.:**

FGS-E11230

**DATE:**

December 30, 2011



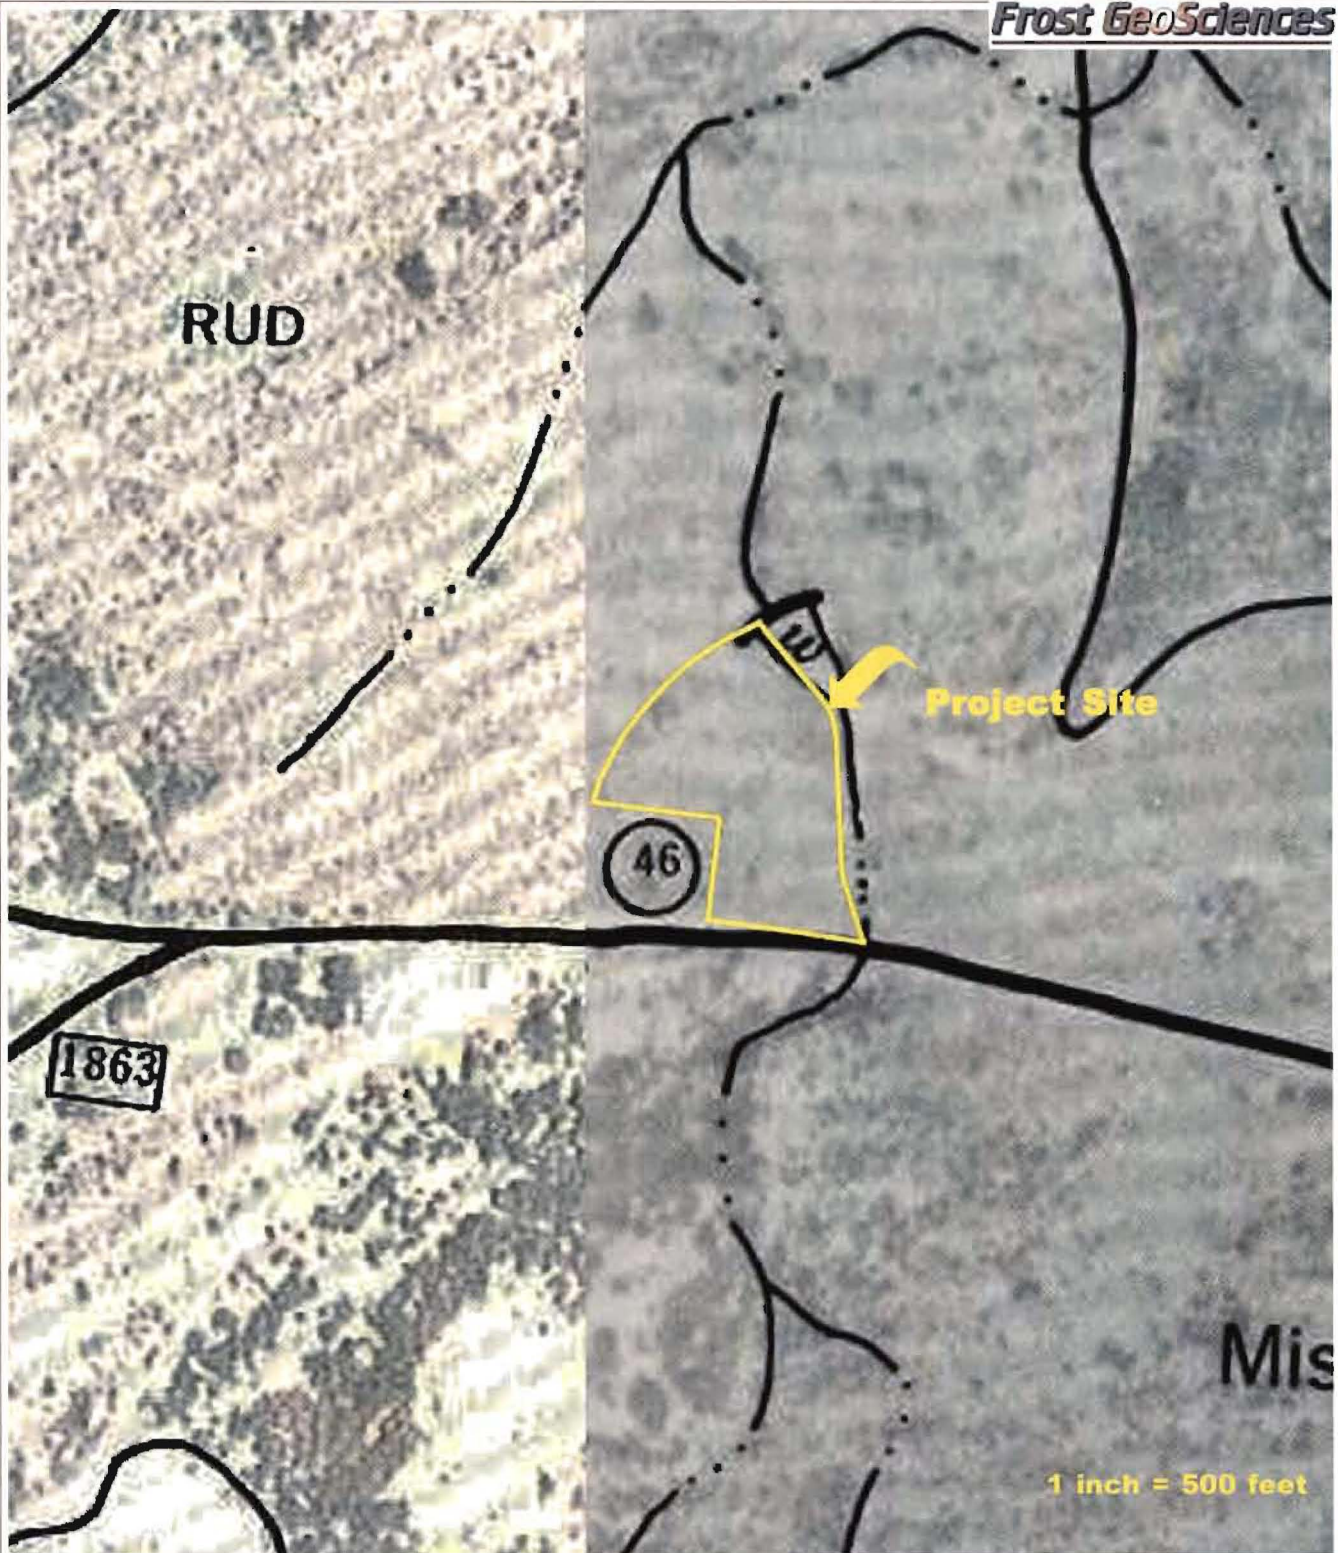

**PROJECT NAME:**

Geologic Site Assessment (WPAP)  
for Regulated Activities / Development on the  
Edwards Aquifer Recharge / Transition Zone  
Freedom Fellowship Church  
New Braunfels, Texas

**1973 Aerial Photograph**  
United States Department of Agriculture


**PROJECT NO.:**

FGS-E11230

**DATE:**

December 30, 2011



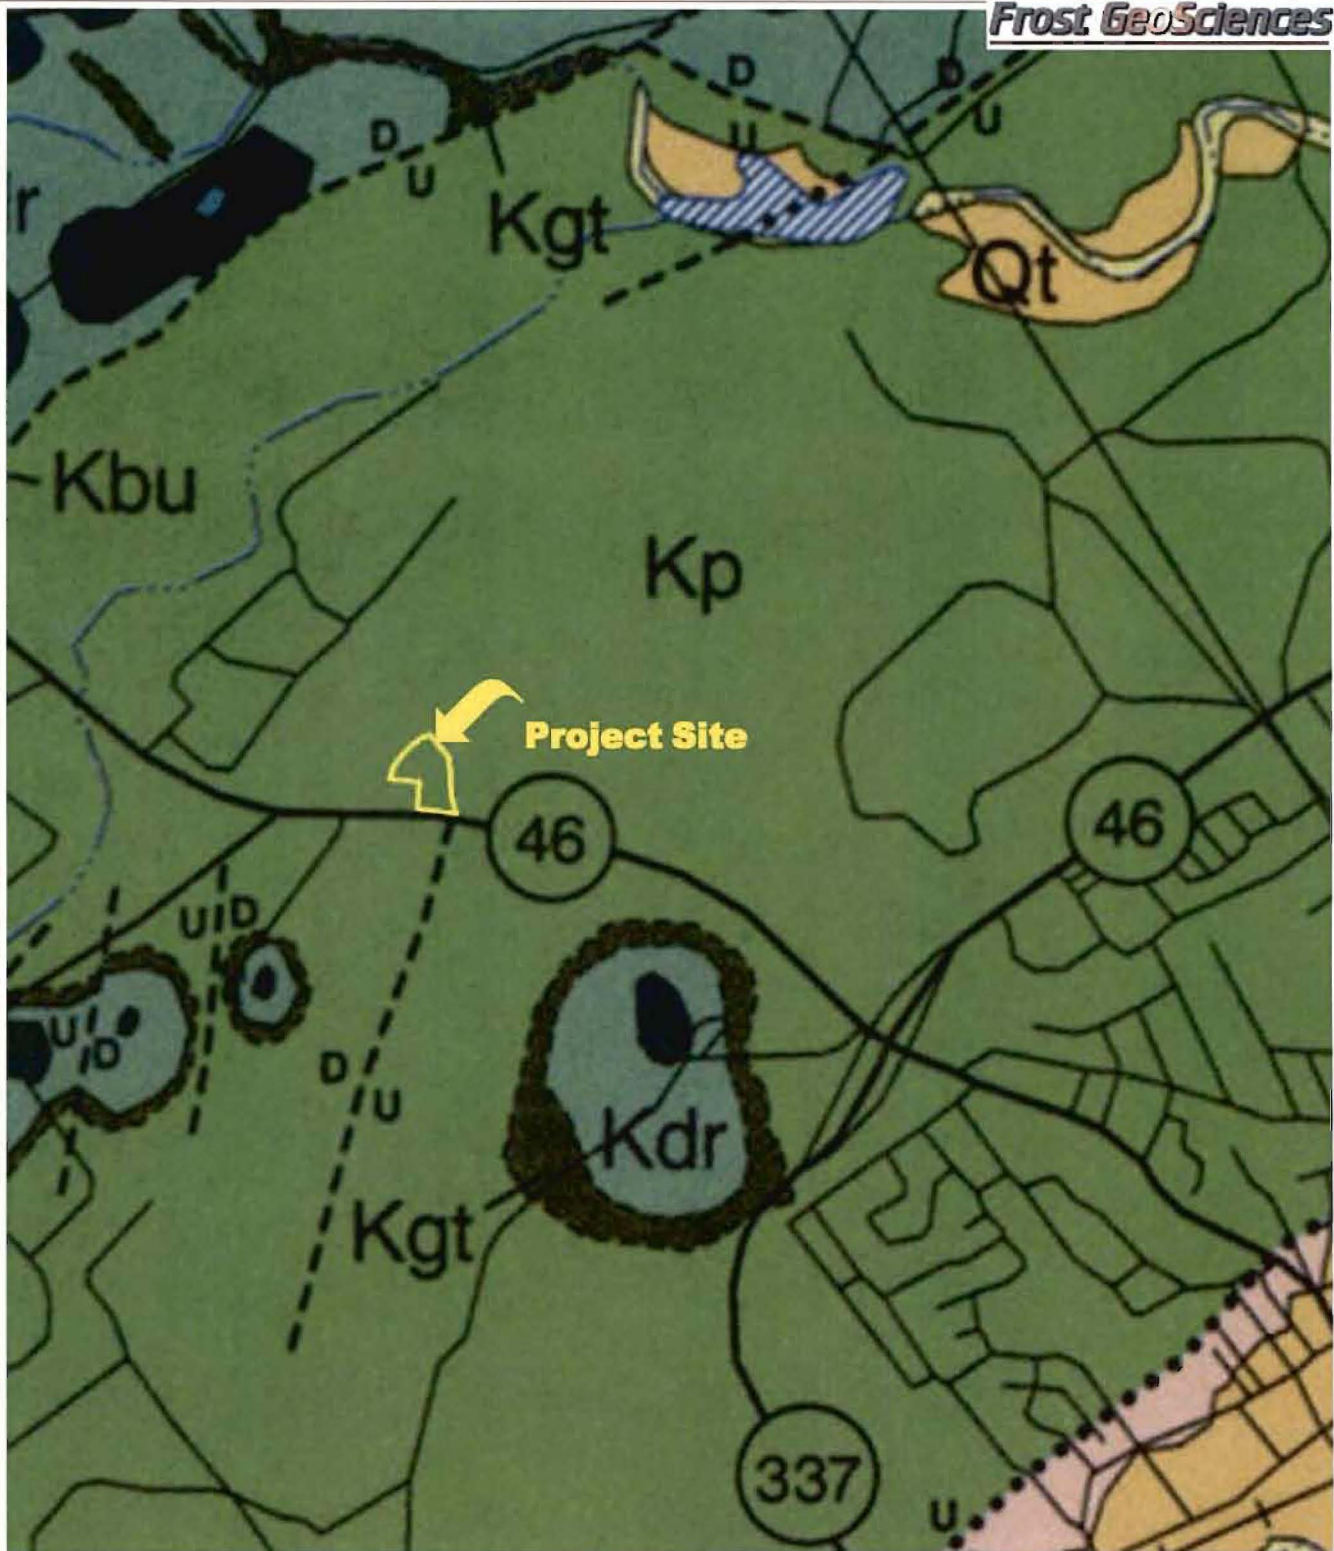

**PROJECT NAME:**

Geologic Site Assessment (WPAP)  
for Regulated Activities / Development on the  
Edwards Aquifer Recharge / Transition Zone  
Freedom Fellowship Church  
New Braunfels, Texas

Bureau of Economic Geology  
Geologic Map of the New Braunfels, Texas  
30 X 60 Minute Quadrangle (2000)


**PROJECT NO.:**

FGS-E11230

**DATE:**

December 30, 2011



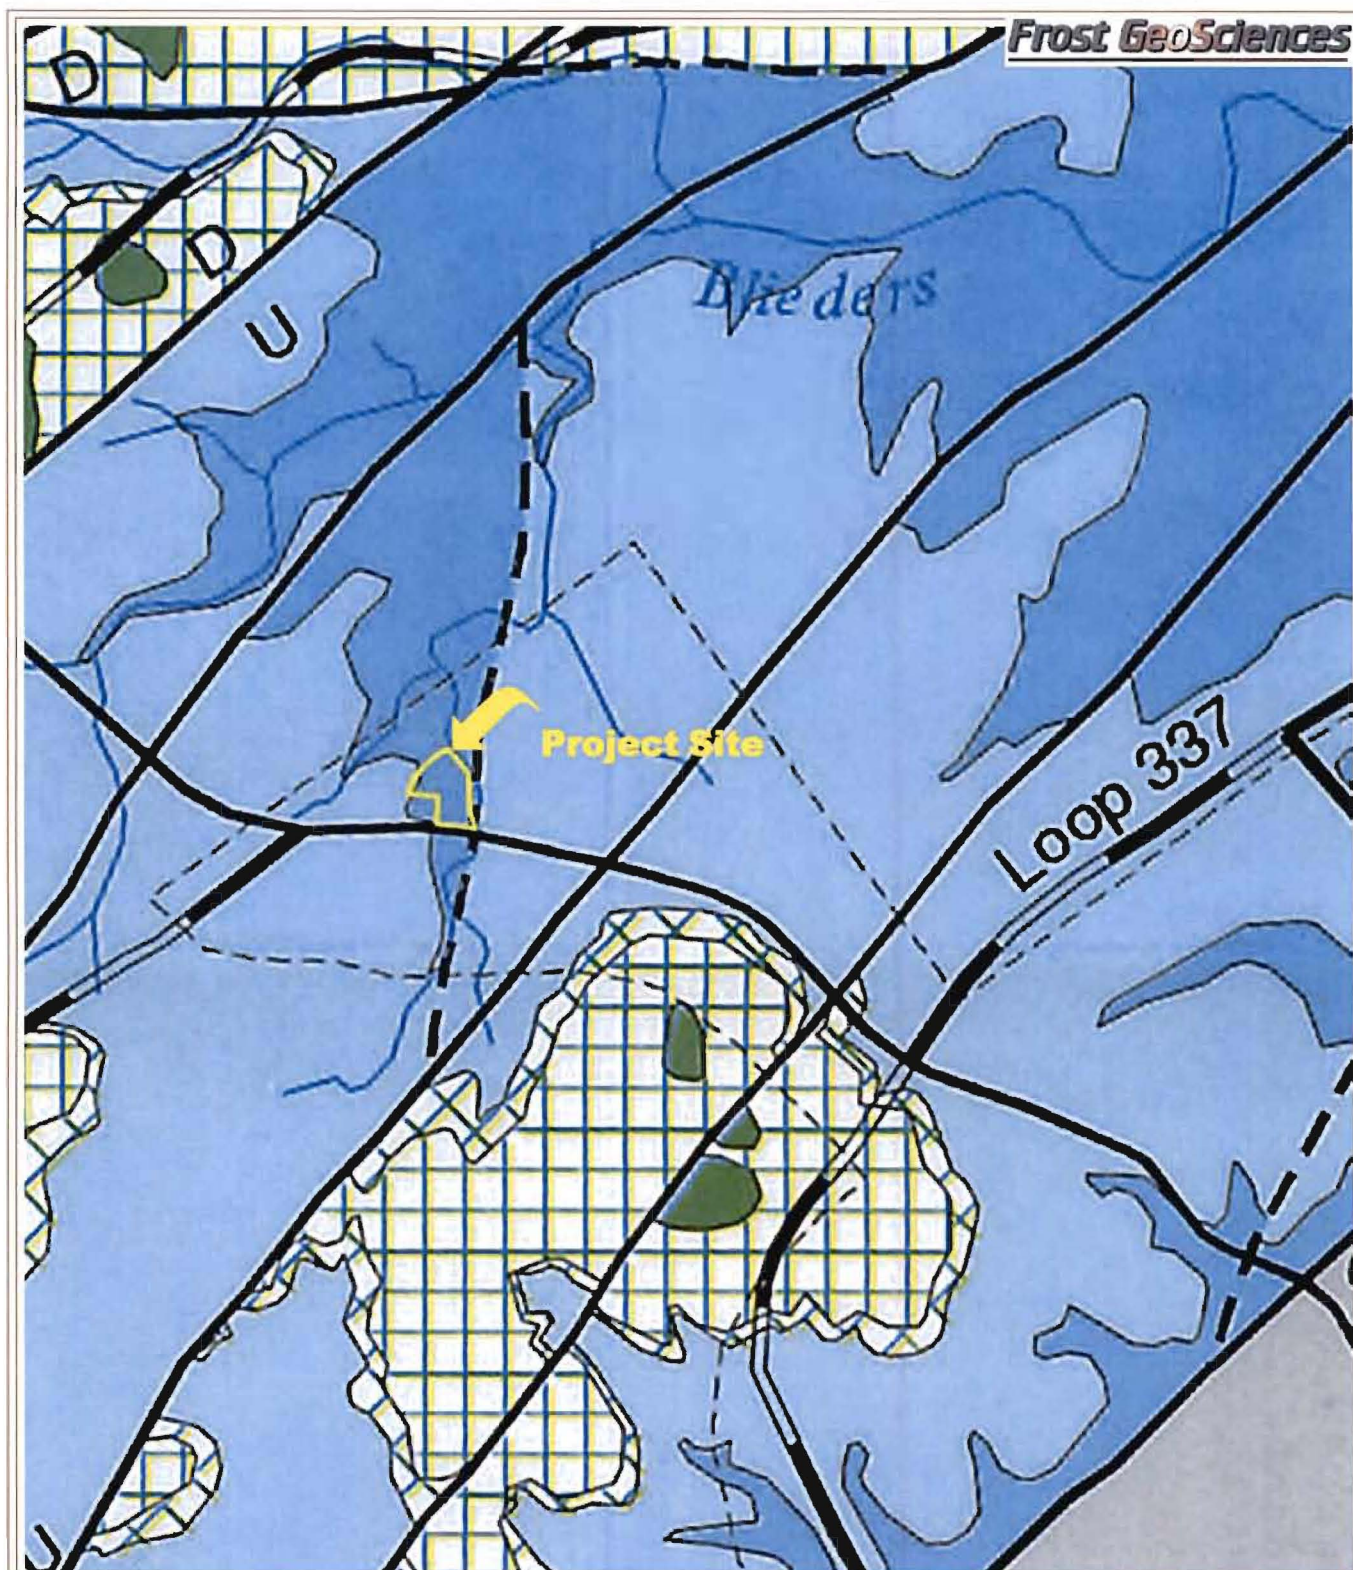

**PROJECT NAME:**

Geologic Site Assessment (WPAP)  
for Regulated Activities / Development on the  
Edwards Aquifer Recharge / Transition Zone  
Freedom Fellowship Church  
New Braunfels, Texas

United States Geologic Survey  
Water Resources Investigations #94-4117  
Geologic Map of Comal County, Texas (1997)


**PROJECT NO.:**

FGS-E11230

**DATE:**

December 30, 2011

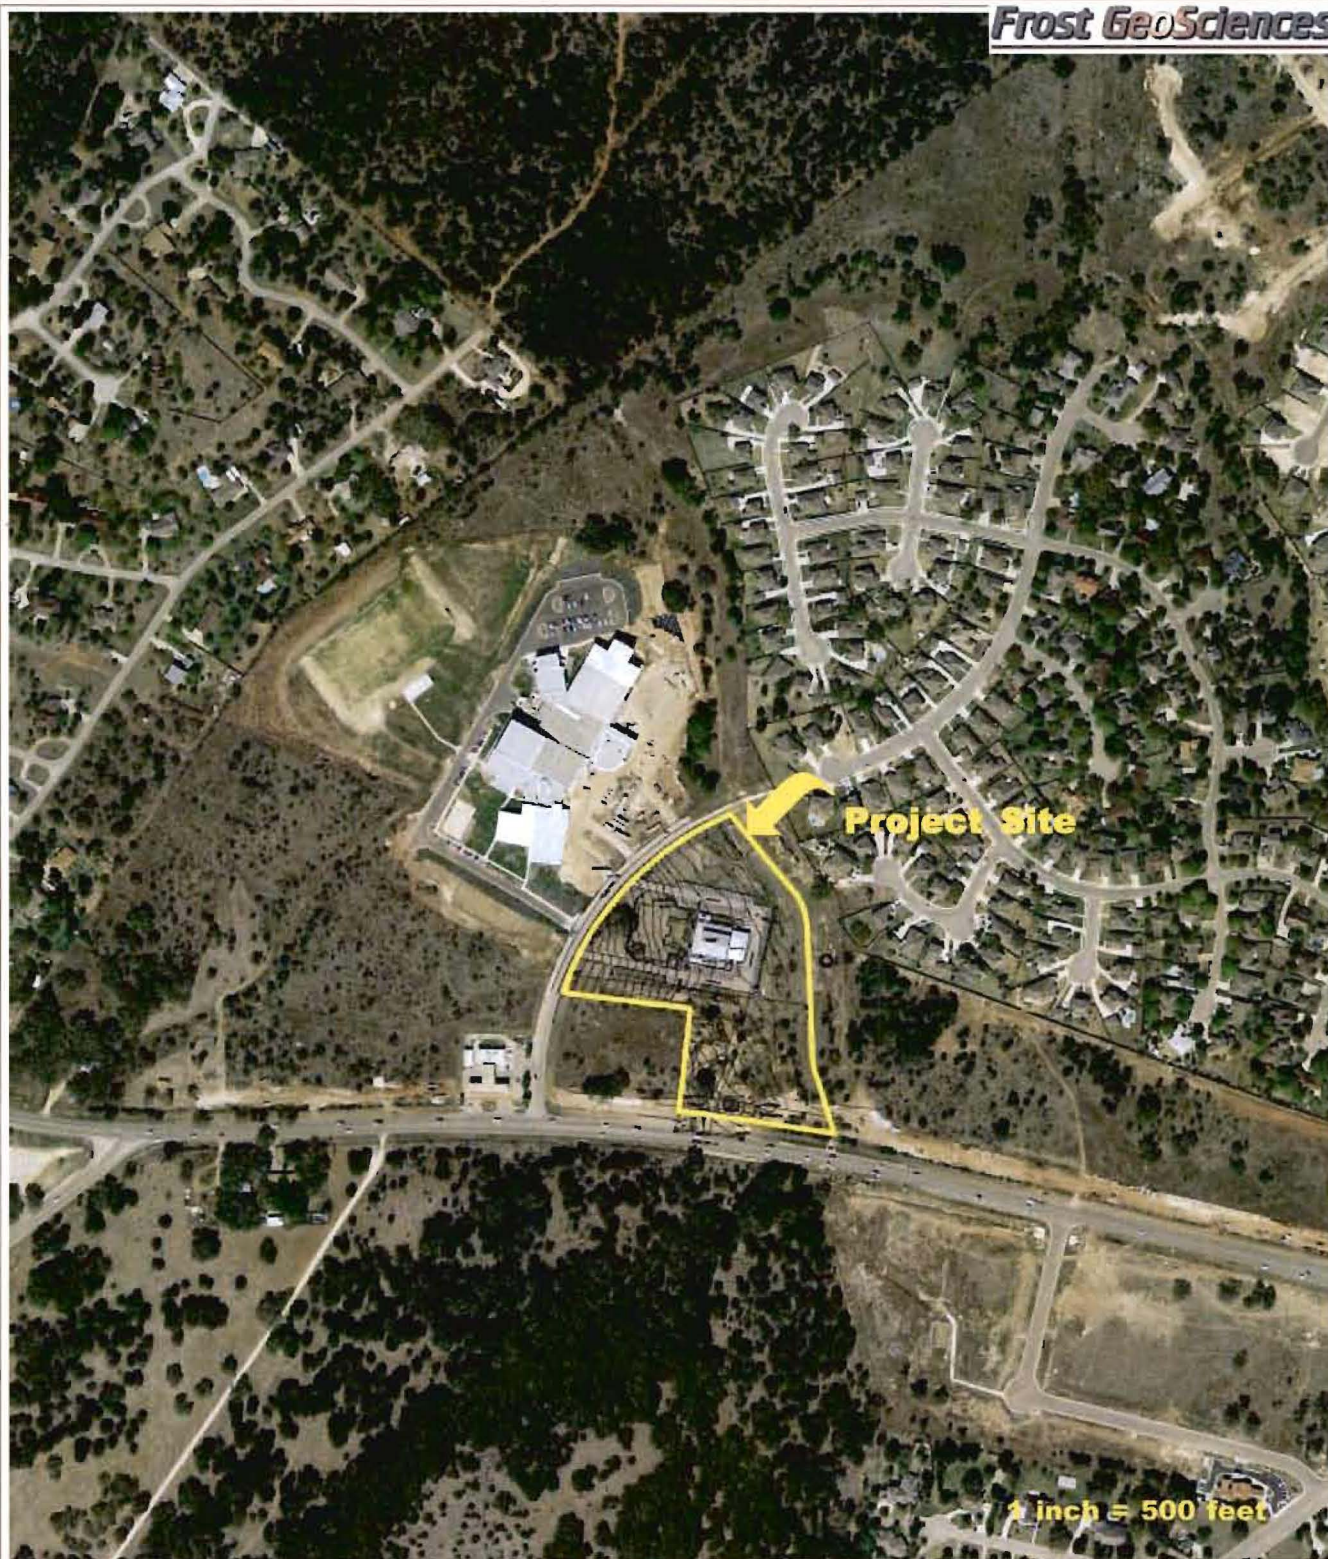

**PROJECT NAME:**

Geologic Site Assessment (WPAP)  
for Regulated Activities / Development on the  
Edwards Aquifer Recharge / Transition Zone  
Freedom Fellowship Church  
New Braunfels, Texas

**2009 Aerial Photograph**  
Landiscor Aerial Information**PROJECT NO.:**

FGS-EI1230

**DATE:**

December 30, 2011





**PROJECT NAME:**

Geologic Site Assessment (WPAP)  
for Regulated Activities / Development on the  
Edwards Aquifer Recharge / Transition Zone  
Freedom Fellowship Church  
New Braunfels, Texas

2009 Aerial Photograph with PRF's  
Landscor Aerial Information

**PROJECT NO.:**

FGS-E11230

**DATE:**

December 30, 2011



## Appendix B

### Site Inspection Photographs



View of the entrance of the project site along the western boundary.



View of the Freedom Fellowship Church.



View to the north, of the paved area in the eastern portion of the site.



View to the west, of the parking area north of Freedom Fellowship Church.



View to the north, of the northern portion of the project site.



View to the north, of the project site along Oak Run Point.





View to the north, of the project site along the eastern property line.



View to the south, of the project site along the eastern property line.



View of the sign for the church along the southern property line.



Typical view of vegetative cover in the southeastern portion of the project site.



Typical view of vegetative cover in the southwestern portion of the project site.



Typical view of vegetative cover in the south central portion of the project site.

## Appendix C

Site Geologic Map



12/30/11



**Modification of a Previously Approved Plan**  
for Regulated Activities on the  
Edwards Aquifer Recharge Zone and Transition Zone  
and Relating to 30 TAC 213.4(j), Effective June 1, 1999

1. Current Regulated Entity Name: Freedom Fellowship Church  
Original Regulated Entity Name: Freedom Fellowship Church  
Assigned Regulated Entity Numbers (RN): 1) 102745890, 2) \_\_\_\_\_, 3) \_\_\_\_\_

\_\_\_\_\_ The applicant has not changed and the Customer Number (CN) is: CN 601399827  
\_\_\_\_\_ The applicant has changed. A new Core Data Form has been provided.

2. X **Attachment A: Original Approval Letter and Approved Modification Letters:** A copy of the original approval letter and copies any letters approving modification are found at the end of this form.

3. A modification of a previously approved plan is requested for (check all that apply):

- \_\_\_\_\_ physical or operational modification of any water pollution abatement structure(s) including but not limited to ponds, dams, berms, sewage treatment plants, and diversionary structures;  
\_\_\_\_\_ change in the nature or character of the regulated activity from that which was originally approved or a change which would significantly impact the ability of the plan to prevent pollution of the Edwards Aquifer;  
X development of land previously identified as undeveloped in the original water pollution abatement plan;  
\_\_\_\_\_ physical modification of the approved organized sewage collection system;  
\_\_\_\_\_ physical modification of the approved underground storage tank system;  
\_\_\_\_\_ physical modification of the approved aboveground storage tank system.

4. Summary of Proposed Modifications (select plan type being modified). If the approved plan has been modified more than once, copy the appropriate table below, as necessary, and complete the information for each additional modification.

WPAP Modification Summary	Approved Project	Proposed Modification
Acres	<u>5.00 ac.</u>	<u>8.05 ac.</u>
Type of Development	<u>Church</u>	<u>Church</u>
Number of Residential Lots	<u>na</u>	<u>na</u>
Impervious Cover (acres)	<u>1.928 ac.</u>	<u>2.944 ac.</u>
Impervious Cover (%)	<u>39%</u>	<u>36.4%</u>
Permanent BMPs	<u>Veg. Filter Strip &amp;</u>	<u>Veg. Filter Strips</u>
Other	<u>Enhanced Extended</u>	<u>&amp; Partial Sedimentation</u>
	<u>Detention Basin</u>	<u>and Filtration Basin</u>
SCS Modification Summary	Approved Project	Proposed Modification
Linear Feet	<u>na</u>	_____
Pipe Diameter	_____	_____
Other	_____	_____
AST Modification Summary	Approved Project	Proposed Modification
Number of ASTs	<u>na</u>	_____
Volume of ASTs	_____	_____
Other	_____	_____



## UST Modification Summary

Number of USTs

Volume of USTs

Other

## Approved Project

na

## Proposed Modification

5. X **Attachment B: Narrative of Proposed Modification.** A narrative description of the nature of the proposed modification is provided at the end of this form. It discusses what was approved, including previous modifications, and how this proposed modification will change the approved plan.
6. X **Attachment C: Current site plan of the approved project.** A current site plan showing the existing site development (i.e., current site layout) at the time this application for modification is provided at the end of this form. A site plan detailing the changes proposed in the submitted modification is required elsewhere.
- \_\_\_\_\_ The approved construction has not commenced. The original approval letter, and any subsequent modification approval letters are included as Attachment A to document that the approval has not expired.
- \_\_\_\_\_ The approved construction has commenced and has been completed. Attachment C illustrates that the site was constructed as approved.
- \_\_\_\_\_ The approved construction has commenced and has been completed. Attachment C illustrates that the site was **not** constructed as approved.
- X The approved construction has commenced and has **not** been completed. Attachment C illustrates that, thus far, the site was constructed as approved.
- \_\_\_\_\_ The approved construction has commenced and has **not** been completed. Attachment C illustrates that, thus far, the site was **not** constructed as approved.
7. X The acreage of the approved plan has increased. A Geologic Assessment has been provided for the new acreage.
- \_\_\_\_\_ Acreage has not been added to **or** removed from the approved plan.
8. X Submit one (1) original and one (1) copy of the application, plus additional copies as needed for each affected incorporated city, groundwater conservation district, and county in which the project will be located. The TCEQ will distribute the additional copies to these jurisdictions. The copies must be submitted to the appropriate regional office.

To the best of my knowledge, the responses to this form accurately reflect all information requested concerning the proposed regulated activities and methods to protect the Edwards Aquifer. This request for a **MODIFICATION TO A PREVIOUSLY APPROVED PLAN** is hereby submitted for TCEQ review and executive director approval. The request was prepared by:

John J. Moy, Jr.

Print Name of Customer/Agent

  
Signature of Customer/Agent

2/21/12  
Date



# Attachment "A"

Robert J. Huston, *Chairman*  
R. B. "Ralph" Marquez, *Commissioner*  
John M. Baker, *Commissioner*  
Jeffrey A. Saitas, *Executive Director*



## TEXAS NATURAL RESOURCE CONSERVATION COMMISSION

*Protecting Texas by Reducing and Preventing Pollution*

July 26, 1999

Mr. Pete Meckel  
Freedom Fellowship Church  
330 S. Hackberry  
New Braunfels, TX 78130

Re: EDWARDS AQUIFER, Comal County  
PROJECT: Freedom Fellowship Church, Project number 1257.00, Located on south side of SH 46 approximately 1.1 miles west of Loop 337, New Braunfels, Texas  
TYPE: Request for Approval of Water Pollution Abatement Plan; 30 Texas Administrative Code (TAC) §213.5(b); Edwards Aquifer Protection Program

Dear Mr. Meckel:

The Texas Natural Resource Conservation Commission (TNRCC) has completed its review of the WPAP application for the referenced project that was submitted by C.B. "Mac" McCoy, P.E. of Sumac Engineering Services, Inc. on behalf of Freedom Fellowship Church, to the San Antonio Regional Office on March 22, 1999. Final review of the WPAP submittal was completed after additional materials were received on April 26, 1999, and July 2, 1999. The WPAP proposed in the application is in general compliance with 30 TAC § 213.5(b); therefore, approval of the plan is hereby granted subject to applicable state rules and the conditions in this approval letter. *This approval expires two (2) years from the date of this approval unless, prior to the expiration date, construction has commenced on the project or an extension of time has been requested.*

### PROJECT DESCRIPTION

The proposed commercial project will have an area of 5.0 acres and will consist of two church buildings (20,000 square feet) and associated parking (1.469 acres). Project wastewater will be disposed of by conveyance to the existing Gruene Sewage Treatment Plant owned by the City of New Braunfels. The proposed impervious cover for the development is approximately 1.928 acres (39%). The site is located within the City of New Braunfels, and must conform with applicable codes and requirements of the City of New Braunfels.

### GEOLOGY ON SITE

According to the geologic assessment (dated February 14, 1999) included with the submittal, one possibly sensitive manmade feature (a clay base for the Freedom Fellowship Church foundation) is located on the

REPLY TO: REGION 13 • 140 HEIMER RD., STE. 360 • SAN ANTONIO, TEXAS 78232-5042 • 210/490-3096 • FAX 210/545-4329

P.O. Box 13087 • Austin, Texas 78711-3087 • 512/239-1000 • Internet address: [www.tnrcc.state.tx.us](http://www.tnrcc.state.tx.us)

printed on recycled paper using soy-based ink



project site. The San Antonio Regional Office site inspection of June 3, 1999, revealed no additional geologic features. However, the following observations were made:

- A. Construction of the building pad had commenced, but was inactive at the time of the site inspection.
- B. The lateral line for the church building had been installed.
- C. Soil appeared to have been imported and placed on the east and north sides of the church pad.

#### GEOLOGY DOWNGRADIENT OF SITE

According to the geologic assessment included with the submittal, there is one possibly sensitive feature located within 1/2-mile downgradient of the project site.

#### PERMANENT POLLUTION ABATEMENT MEASURES

The following measures will be taken to prevent pollution of stormwater originating on-site or up-gradient from the project site and potentially flowing across and off the site after construction:

- A. The on-line, enhanced extended detention basin is designed to remove total phosphorous and total suspended solids, and is designed in accordance with the 1998 edition of the LCRA Nonpoint Source Pollution Control Technical Manual and is sized to capture the first 2,250 cubic feet (0.0517 acre-feet) of stormwater run-off from five (5) acres. According to the 1998 edition of the LCRA Nonpoint Source Pollution Control Technical Manual, Page C-26, Paragraphs 4 and 5, the on-line, enhanced extended detention basin will consist of:
  - 1. An outflow structure sized to allow for complete drawdown of the water quality volume in 40 hours. No more than 50 percent of the water quality volume shall drain within the first 12 hours. The outflow structure shall be configured to provide at least 6-hour detention for the runoff from a 0.5 inch rainfall.
  - 2. The facility shall have a separate drain pipe with a manual valve that can completely or partially drain the pond for maintenance purposes. To allow for possible sediment accumulation, the submerged end of the pipe should be protected, and the drain pipe should be sized one pipe schedule higher than the calculated diameter needed to drain the pond within 24 hours. The valves should be located where they can be operated in a safe and convenient manner.
  - 3. Vegetation. The facility shall be planted and maintained to provide for a full and robust vegetative cover.
- B. The 0.70 acre vegetative filter strip is designed to remove the oil and grease component of the stormwater runoff and is designed in accordance with the on-line, enhanced extended



detention basin is designed in accordance with the 1998 edition of the LCRA Nonpoint Source Pollution Control Technical Manual. The filter strip will:

1. be contiguous with developed area,
2. be at the same elevation as the developed area,
3. have a level spreading device, and
4. be sized to filter stormwater run-off from 1.469 acres of impervious cover.

#### SPECIAL CONDITIONS

1. If any potential sensitive features are encountered during construction, a geologist shall evaluate the significance of the features. The evaluation shall include representative photographs and a description of the feature forwarded to the San Antonio office. Construction in the vicinity of the features may only continue with written approval from the TNRCC.
2. Placement of hydrocarbon or hazardous substance storage facilities regulated pursuant to 213.5(d) and 213.5(e), requires submittal of all appropriate applications with appropriate fees and must receive prior approval from the TNRCC.
3. The temporary and permanent best management practices (BMPs) for the proposed project have been reviewed by the Commission's staff. As presented to the TNRCC, the BMPs were designed by a Texas Licensed Professional Engineer to be in accordance with the requirements of 30 TAC §213.5(b). Therefore, based on the Texas Licensed Professional Engineer's certification of compliance, the planning materials for construction of the proposed pollution abatement measures are hereby approved.
4. The vegetated filter and on-line, enhanced extended detention basin are designed in accordance with the 1998 edition of the LCRA Nonpoint Source Pollution Control Technical Manual. They will incorporate stormwater treatment as described above.
5. All sediment and or media removed from the basin during maintenance activities shall be properly disposed of according to 30 TAC 330 or 30 TAC 335 as applicable.
6. After construction of the on-line, enhanced extended detention basin, a Texas Licensed Professional Engineer will provide certification that it was constructed to capture 2,250 cubic feet of stormwater runoff.
7. All permanent pollution abatement measures shall be operational prior to commencement of commercial operation.
8. Any use of this commercial property, other than retail stores, restaurants, and office space, shall require prior approval from the regional office of the TNRCC and may require submittal and approval of a WPAP.



9. The TNRCC may monitor stormwater discharges from the site to evaluate the adequacy of permanent erosion and sedimentation (E&S) control measures. Additional controls may be necessary if excessive solids are being discharged from the site.
10. Based on the June 3, 1999, on-site inspection of the project site, construction of building pad was actually initiated on or before June 3, 1999. This activity was conducted without the prior approval of the water pollution abatement plan, as required by Commission rules (30 TAC Chapter 213). Therefore, the applicant is hereby advised that the after-the-fact approval of the water pollution abatement plan, as provided by this letter, shall not absolve the applicant of any prior violations of Commission rules related to this project, and shall not necessarily preclude the Commission from pursuing appropriate enforcement actions and administrative penalties associated with such violations, as provided in 30 TAC §313.10 of Commission rules.
11. Provide an affidavit to the TNRCC certifying that all fill material from each source site that has been placed on the project site is inert material, as defined by 30 TAC 330.2, and free of hazardous materials, and free of all municipal solid waste, including asphalt and demolition materials. This affidavit should be based on:
  1. Phase I site assessment, or
  2. Results of testing (RCRA-8 metals and TPH).

Note #1: For petroleum-substance contaminated soil, 30 TAC 334.481 defines "clean fill" as, "Clean fill standard - Soil which is no longer considered waste, e.g. soil cleaned to less than .5 mg/kg for each constituent of BTEX, and less than 10 mg/kg for TPH."

Note #2: EPA Method 418.1 may not be available in the future, and an alternative method acceptable to the TNRCC would then be required.

Note #3: Results of a composite soil sample collected around existing structures at each source material site, evaluated for presence of chlordane. Should chlordane be present in excess of 0.493 mg/kg (per 30 TAC §335.551 to §335.569) the material shall be disposed of at an authorized landfill.

#### STANDARD CONDITIONS

1. During the course of regulated activities related to this project, the applicant or his agent shall comply with all applicable provisions of 30 TAC Chapter 213, Edwards Aquifer. The applicant shall remain responsible for the provisions and conditions of this approval until such responsibility is legally transferred to another person or entity, upon which that person or entity shall assume responsibility for all provisions and conditions of this approval.



Mr. Pete Meckel

July 26, 1999

Page 5

2. Any modification to the activities described in the referenced WPAP application following the date of approval may require the submittal of a WPAP to amend this approval, including the payment of appropriate fees and all information necessary for its review and approval.
3. Prior to commencing any regulated activity, the applicant or his agent must notify the San Antonio Regional Office in writing of the date on which the regulated activity will begin.
4. The applicant or his agent shall record this WPAP approval in the county deed records within 30 days of receiving this notice of approval. Proof of deed recordation shall be submitted to the San Antonio Regional Office prior to commencing construction. A suggested format that you may use to deed record the approved WPAP is enclosed.
5. All contractors conducting regulated activities at the project location shall be provided a copy of this notice of approval. At least one complete copy of the approved WPAP and this notice of approval shall be maintained at the project location until all regulated activities are completed.
6. Temporary erosion and sedimentation (E&S) controls, i.e., silt fences, rock berms, stabilized construction entrances, or other controls described in the approved WPAP, must be installed prior to construction and maintained during construction. Temporary E&S controls may be removed when vegetation is established and the construction area is stabilized. If a water quality pond is proposed, it shall be used as a sedimentation basin during construction. The TNRCC may monitor stormwater discharges from the site to evaluate the adequacy of temporary E&S control measures. Additional controls may be necessary if excessive solids are being discharged from the site.
7. If any significant recharge feature [sensitive feature] is discovered during construction, all regulated activities near the feature must be suspended immediately. The applicant or his agent must immediately notify the San Antonio Regional Office of the discovery of the feature. Regulated activities near the feature may not proceed until the executive director has reviewed and approved the methods proposed to protect the feature and the aquifer from potential adverse impacts to water quality.
8. At project locations where construction is initiated and abandoned, or not completed, the site shall be returned to a condition such that the aquifer is protected from potential contamination.
9. Approval of the design of the sewage collection system for this proposed project shall be obtained from the TNRCC prior to commencement of construction of any sewage collection system.
10. No wells exist on the site. Any abandoned wells shall be plugged in accordance with 16 TAC §76 or an equivalent method, as approved by the Executive Director.

Any drill holes resulting from core sampling on-site or down-gradient of the site shall be plugged with native soil, from the bottom of the hole to the top of the hole, so as to not allow water or contaminants to enter the subsurface environment.




Mr. Pete Meckel  
July 26, 1999  
Page 6

11. Pursuant to §26.136 of the Texas Water Code, any violations of the requirements in 30 TAC §213 may result in administrative penalties.

Should clarification of this letter be desired or if we may be of any other assistance, please contact John Mauser of our San Antonio Regional office at 210/403-4024. Please reference project number 1257.

Sincerely,



Jeffrey A. Saitas, P.E.  
Executive Director

Texas Natural Resource Conservation Commission

JAS/JKM/EG

Enclosure: Deed Recordation Affidavit

cc: C.B. "Mac" McCoy, Sumac Engineering Services  
Harry Bennett, City of New Braunfels  
John Bohuslav, TxDot San Antonio District  
Tom Hornseth, Comal County  
Greg Ellis, Edwards Aquifer Authority  
TNRCC Field Operations, Austin



Kathleen Hartnett White, *Chairman*  
R. B. "Ralph" Marquez, *Commissioner*  
Larry R. Soward, *Commissioner*  
Glenn Shankle, *Executive Director*



## TEXAS COMMISSION ON ENVIRONMENTAL QUALITY

*Protecting Texas by Reducing and Preventing Pollution*

January 6, 2006

Mr. Pete Meckel  
Freedom Fellowship Church  
330 S. Hackberry  
New Braunfels, Texas 78130

Re: Edwards Aquifer, Comal County  
NAME OF PROJECT: Freedom Fellowship Church; Located on south side of SH 46 approximately 1.1 miles west of Loop 337, New Braunfels, Texas  
TYPE OF PLAN: Request for Approval of a Water Pollution Abatement Plan (WPAP); 30 Texas Administrative Code (TAC) Chapter 213 Edwards Aquifer  
Edwards Aquifer Protection Program File No. 1257.00

Dear Mr. Meckel:

The Texas Commission on Environmental Quality (TCEQ) received a request for technical assistance regarding changes for the referenced project that was submitted on behalf of Freedom Fellowship Church by L. David Givler, MSCE, P.E. of Givler Engineering, Inc. and received by the San Antonio office on December 15, 2005.

The correspondence describing changes to the approved Water Pollution Abatement Plan (WPAP) and a revised site plan have been placed in the files. It is noted that this revision will consist of the addition of a 3,840 square foot expansion to the back side of the existing church building. The building expansion will be built on the existing asphalt parking area. The addition of the proposed building expansion will not increase the impervious cover on the developed portion of the property.


A strip of asphalt (960 square feet) will be added to the parking lot directly behind the proposed expansion. The asphalt will increase the impervious cover by 0.02 acres. The permanent Best Management Practices (BMPs) (vegetative filter strip and enhanced extended detention basin) on site were approved in the WPAP dated July 26, 1999. The BMPs were designed to treat 39% impervious cover for the 5 acre site. Included in the 39% impervious cover calculations was a second church building, however the structure was never built. The actual current impervious cover on site is 32.8%. The proposed addition of the asphalt strip will result in an increase of 0.4%. The new total impervious cover will be 33.2%. The new addition will not exceed the amount of impervious cover originally approved (39%) by the July 26, 1999 WPAP, therefore no modifications to the existing BMPs will be necessary.



Mr. Pete Meckel  
January 6, 2006  
Page 2

Should clarification of this letter be desired or if we may be of any other assistance, please contact Agnieszka M. Hobson of our San Antonio office at 210/403-4075. Please reference project number 1257.00.

Sincerely,



Bobby D. Caldwell,  
Water Section Manager  
San Antonio Region Office

BDC/AMH/eg

fc/cc: Mr. L. David Givler, P.E., Givler Engineering, Inc.  
Mr. Michael Short, City of New Braunfels  
Mr. Tom Hornseth, Comal County  
Mr. Robert J. Potts, Edwards Aquifer Authority  
TCEQ Central Records, MC 212




**ATTACHMENT "B"**  
**NARRATIVE OF PROPOSED MODIFICATION**

The purpose of this Modification is to expand the current project site and include the 3.05 acre lot adjacent to the existing 5.00 acre tract currently under an approved WPAP. There is an existing church with associated parking located on the 5.00 ac. tract and the current impervious cover is 32%. The total approved impervious cover for the 5.00 acre tract, per the TCEQ approval letter, is 1.928 ac (39%). This impervious cover is being treated by a combination of an existing Vegetated Filter Strip and an on-line Enhanced Extended Detention Basin which will remain in place. The proposed impervious cover consisting of the construction of the second church building and associated pavement/sidewalks, per the approved WPAP, contributing to these existing Permanent Pollution Abatement Measures is 1.902 acres, which does not exceed the approved 1.928 acres of impervious cover previously approved.

The proposed Modification will change the previously approved WPAP by adding the adjacent 3.05 ac. site to the existing 5.00 acre site for a total project site plan of 8.05 acres. Contained in this Modification are the areas of new development on the 5.00 ac. tract as well as the improvements on the 3.05 ac. tract. The overall proposed improvements will consist of a new access driveway which will connect the existing parking area to State Highway 46, the construction of the second church building and the addition of some parking areas which are located predominantly on the southern side of the existing building. The additional impervious cover associated with the proposed improvements, not draining to the existing BMP's, will be treated by Engineered Vegetative Filter Strips and a Partial Sedimentation/Filtration Basin.



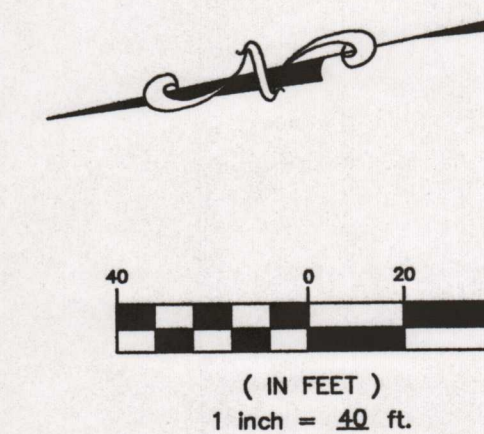

1. EXISTING SITE IMPROVEMENTS SHOWN ARE BASED ON SURVEY INFORMATION PROVIDED BY McMICHAEL LAND SURVEYING.
2. APPROXIMATE LOCATION OF ENHANCED EXTENDED DETENTION BASIN AND VEGETATIVE FILTER STRIP WAS SCALED IN BASED ON APPROVED WPAP SITE PLAN.
3. EXISTING APPROVED SITE = 5.00 AC.

APPROVED IMPERVIOUS COVER PER TCEQ LETTER  
DATED JULY 26, 1999 = 1.928 AC (39%)

EXISTING IMPERVIOUS COVER = 1.595 AC (32%)

APPROVED IMPERVIOUS COVER PER TCEQ LETTER  
DATED JULY 26, 1999 = 1.928 AC (39%)

EXISTING IMPERVIOUS COVER = 1.595 AC (32%)

**FREEDOM FELLOWSHIP CHURCH**  
NEW BRAUNFELS, TEXAS



**OWNER:**  
FREEDOM FELLOWSHIP CHURCH  
10 OAK RUN POINT  
NEW BRUNSWICK, TX 78132

<b>DRAWN BY:</b>	D.G. III	<b>DATE:</b>	FEBRUARY 2012
<b>CHECKED BY:</b>	J.J.M.	<b>JOB NO.:</b>	1111.01



RECEIVED

FEB 29 2012

COUNTY ENGINEER

**Water Pollution Abatement Plan Application**  
for Regulated Activities  
on the Edwards Aquifer Recharge Zone  
and Relating to 30 TAC §213.5(b), Effective June 1, 1999

REGULATED ENTITY NAME: Freedom Fellowship Church

**REGULATED ENTITY INFORMATION**

1. The type of project is:  
☐ Residential: # of Lots: \_\_\_\_\_  
☐ Residential: # of Living Unit Equivalents: \_\_\_\_\_  
☒ Commercial  
☐ Industrial  
☐ Other: \_\_\_\_\_
2. Total site acreage (size of property): 8.05 acres
3. Projected population: 512 Seats
4. The amount and type of impervious cover expected after construction are shown below:

Impervious Cover of Proposed Project	Sq. Ft.	Sq. Ft./Acre	Acres
Structures/Rooftops	32,472	÷ 43,560 =	0.745
Parking (Parking & Drives)	81,482	÷ 43,560 =	1.871
Other paved surfaces (Sidewalks & Retaining Wall)	14,300	÷ 43,560 =	0.328
Total Impervious Cover	128,254	÷ 43,560 =	2.944
Total Impervious Cover ÷ Total Acreage x 100 =			36.6%

5. ☒ **ATTACHMENT A - Factors Affecting Water Quality.** A description of any factors that could affect surface water and groundwater quality is provided at the end of this form.
6. ☒ Only inert materials as defined by 30 TAC §330.2 will be used as fill material.

**FOR ROAD PROJECTS ONLY**

Complete questions 7-12 if this application is exclusively for a road project.

7. Type of project:  
☐ TXDOT road project.  
☐ County road or roads built to county specifications.  
☐ City thoroughfare or roads to be dedicated to a municipality.  
☐ Street or road providing access to private driveways.
8. Type of pavement or road surface to be used:  
☐ Concrete  
☐ Asphaltic concrete pavement  
☐ Other: \_\_\_\_\_



9. Length of Right of Way (R.O.W.): \_\_\_\_\_ feet.  
 Width of R.O.W.: \_\_\_\_\_ feet.  
 $L \times W = \text{_____ Ft}^2 \div 43,560 \text{ Ft}^2/\text{Acre} = \text{_____ acres}.$
10. Length of pavement area: \_\_\_\_\_ feet.  
 Width of pavement area: \_\_\_\_\_ feet.  
 $L \times W = \text{_____ Ft}^2 \div 43,560 \text{ Ft}^2/\text{Acre} = \text{_____ acres}.$   
 Pavement area \_\_\_\_\_ acres  $\div$  R.O.W. area \_\_\_\_\_ acres  $\times 100 = \text{_____ \%}$  impervious cover.
11. \_\_\_\_\_ A rest stop will be included in this project.  
 \_\_\_\_\_ A rest stop will **not** be included in this project.
12. \_\_\_\_\_ Maintenance and repair of existing roadways that do not require approval from the TCEQ Executive Director. Modifications to existing roadways such as widening roads/adding shoulders totaling more than one-half (1/2) the width of one (1) existing lane require prior approval from the TCEQ.

#### STORMWATER TO BE GENERATED BY THE PROPOSED PROJECT

13. X **ATTACHMENT B - Volume and Character of Stormwater.** A description of the volume and character (quality) of the stormwater runoff which is expected to occur from the proposed project is provided at the end of this form. The estimates of stormwater runoff quality and quantity should be based on area and type of impervious cover. Include the runoff coefficient of the site for both pre-construction and post-construction conditions.

#### WASTEWATER TO BE GENERATED BY THE PROPOSED PROJECT

14. The character and volume of wastewater is shown below:  
       X % Domestic            2,193 gallons/day (Based on NBU's LUE's)  
       \_\_\_\_ % Industrial        \_\_\_\_\_ gallons/day  
       \_\_\_\_ % Commingled      \_\_\_\_\_ gallons/day  
                                  TOTAL 2,193 gallons/day (Based on NBU's LUE's)
15. Wastewater will be disposed of by:  
N/A **On-Site** Sewage Facility (OSSF/Septic Tank):  
       \_\_\_\_\_ **ATTACHMENT C - Suitability Letter from Authorized Agent.** An on-site sewage facility will be used to treat and dispose of the wastewater. The appropriate licensing authority's (authorized agent) written approval is provided at the end of this form. It states that the land is suitable for the use of an on-site sewage facility or identifies areas that are not suitable.  
       \_\_\_\_\_ Each lot in this project/development is at least one (1) acre (43,560 square feet) in size. The system will be designed by a licensed professional engineer or registered sanitarian and installed by a licensed installer in compliance with 30 TAC Chapter 285.
- X Sewage Collection System (Sewer Lines):  
       X Private service laterals from the wastewater generating facilities will be connected to an existing SCS.  
       \_\_\_\_\_ Private service laterals from the wastewater generating facilities will be connected to a proposed SCS.  
       \_\_\_\_\_ The SCS was previously submitted on \_\_\_\_\_.



- ☐ The SCS was submitted with this application.  
☐ The SCS will be submitted at a later date. The owner is aware that the SCS may not be installed prior to Executive Director approval.

The sewage collection system will convey the wastewater to the Gruene Road  
(name) Treatment Plant. The treatment facility is:  
☒ existing.  
☐ proposed.

16. ☒ All private service laterals will be inspected as required in 30 TAC §213.5.

### SITE PLAN REQUIREMENTS

Items 17 through 27 must be included on the Site Plan.

17. The Site Plan must have a minimum scale of 1" = 400'.  
Site Plan Scale: 1" = 40'.

18. 100-year floodplain boundaries  
☐ Some part(s) of the project site is located within the 100-year floodplain. The floodplain is shown and labeled.  
☒ No part of the project site is located within the 100-year floodplain.

The 100-year floodplain boundaries are based on the following specific (including date of material) source(s):

FEMA Flood Insurance Rate Map for Comal County, Texas  
Community Panel Number 48091C0435F (Rev. 09/02/09)

19. ☒ The layout of the development is shown with existing and finished contours at appropriate, but not greater than ten-foot contour intervals. Show lots, recreation centers, buildings, roads, etc.  
☐ The layout of the development is shown with existing contours. Finished topographic contours will not differ from the existing topographic configuration and are not shown.
20. All known wells (oil, water, unplugged, capped and/or abandoned, test holes, etc.):  
☒ There are      (#) wells present on the project site and the locations are shown and labeled. (Check all of the following that apply)  
☐ The wells are not in use and have been properly abandoned.  
☐ The wells are not in use and will be properly abandoned.  
☐ The wells are in use and comply with 16 TAC §76.  
☒ There are no wells or test holes of any kind known to exist on the project site.

21. Geologic or manmade features which are on the site:  
☐ All **sensitive** geologic or manmade features identified in the Geologic Assessment are shown and labeled.  
☒ No **sensitive** geologic or manmade features were identified in the Geologic Assessment.  
☐ **ATTACHMENT D - Exception to the Required Geologic Assessment.** An exception to the Geologic Assessment requirement is requested and explained at the end of this form.

22. ☒ The drainage patterns and approximate slopes anticipated after major grading activities.

23. ☒ Areas of soil disturbance and areas which will not be disturbed.



24. X Locations of major structural and nonstructural controls. These are the temporary and permanent best management practices.
25. X Locations where soil stabilization practices are expected to occur.
26. X Surface waters (including wetlands).
27. X Locations where stormwater discharges to surface water or sensitive features. (Site Discharges  
There will be no discharges to surface water or sensitive features. to an existing  
dry/natural  
creek)

#### ADMINISTRATIVE INFORMATION

28. X Submit one (1) original and one (1) copy of the application, plus additional copies as needed for each affected incorporated city, groundwater conservation district, and county in which the project will be located. The TCEQ will distribute the additional copies to these jurisdictions. The copies must be submitted to the appropriate regional office.
29. X Any modification of this WPAP will require Executive Director approval, prior to construction, and may require submission of a revised application, with appropriate fees.

To the best of my knowledge, the responses to this form accurately reflect all information requested concerning the proposed regulated activities and methods to protect the Edwards Aquifer. This **WATER POLLUTION ABATEMENT PLAN APPLICATION FORM** is hereby submitted for TCEQ review and Executive Director approval. The form was prepared by:

John J. Moy, Jr.

Print Name of Customer/Agent

John J. Moy, Jr.  
Signature of Customer/Agent

2/21/12  
Date



## **WATER POLLUTION ABATEMENT PLAN APPLICATION**

### **5. Attachment A – Factors Affecting Water Quality**

The potential sources of contamination on the proposed project include, but are not limited to, hydrocarbons, such as oil and grease, vehicle/machinery fluid leaks, trash or debris, and fertilizers and soil runoff.

All construction equipment will be fueled off-site, and no hazardous materials shall be utilized for the construction of the proposed improvements. Portable toilets will be placed on site for use by construction workers during construction activities. All waste will be hauled off site daily, as generated.

Prior to any construction activity, stormwater pollution prevention controls shall be installed and these controls include silt fence east of the proposed access drive (down-gradient of soil disturbance), a rock berm downstream of the proposed 24" culvert, silt fence downstream of the proposed sidewalk construction along Oak Run Point, and the installation of a stabilized construction entrance/exit to reduce sediment removal from the site. The construction contractor will be responsible for the installation, repair and upkeep of all control measures.

After construction is complete and the site has been built, the factors affecting water quality will include runoff from the roofs, paved areas, sidewalks and greenbelt areas. Chemicals that may be present include pesticides and fertilizers for the greenbelt areas as well as miscellaneous oils or fuels from vehicles utilizing the drives. However, the stormwater runoff from these areas will be treated by the existing enhanced extended detention basin/vegetated filter strip, the proposed Partial Sedimentation/Filtration pond and Engineered Vegetative Filter strips as shown on the Site Plan, Sheet S-1.

### **13. Attachment B – Volume and Character of Stormwater**

The stormwater runoff generated from this site will consist of runoff from the roofs, paved areas, sidewalks and greenbelt areas. The runoff may contain small amounts of suspended solids, fertilizers/pesticides for the greenbelt areas or oils/fuel that would be associated with vehicles entering/exiting and/or being stored on the site. The average runoff coefficient for the site is  $C_{10pre} = 0.44$  due to the existing improvements and the average Post-Construction runoff coefficient is  $C_{10post} = 0.54$  (See Drainage Area Map in the Temporary Stormwater Section for hydrology calculations). Based on the BMP calculations provided in this submittal, there will be a Water Quality Volume of 3,481 cf required to treat the portion of the site that does not drain to the existing BMP's or the




engineered vegetated filter strips and 3,594 cf has been provided in the design of the Partial Sedimentation and Filtration Pond. Prior to exiting the site, a portion of the storm water will be conveyed to a detention pond which will aid in the sedimentation of solids and improve the overall water quality.



## SITE PLAN






**OWNER:**  
FREEDOM FELLOWSHIP CHURCH  
10 OAK RUN POINT  
NEW BRUNSWICK, TX 78132

**STILL  
PLAN  
FOR**

---

**FREEDOM FELLOWSHIP CHURCH**  
NEW BRAUNFELS, TEXAS

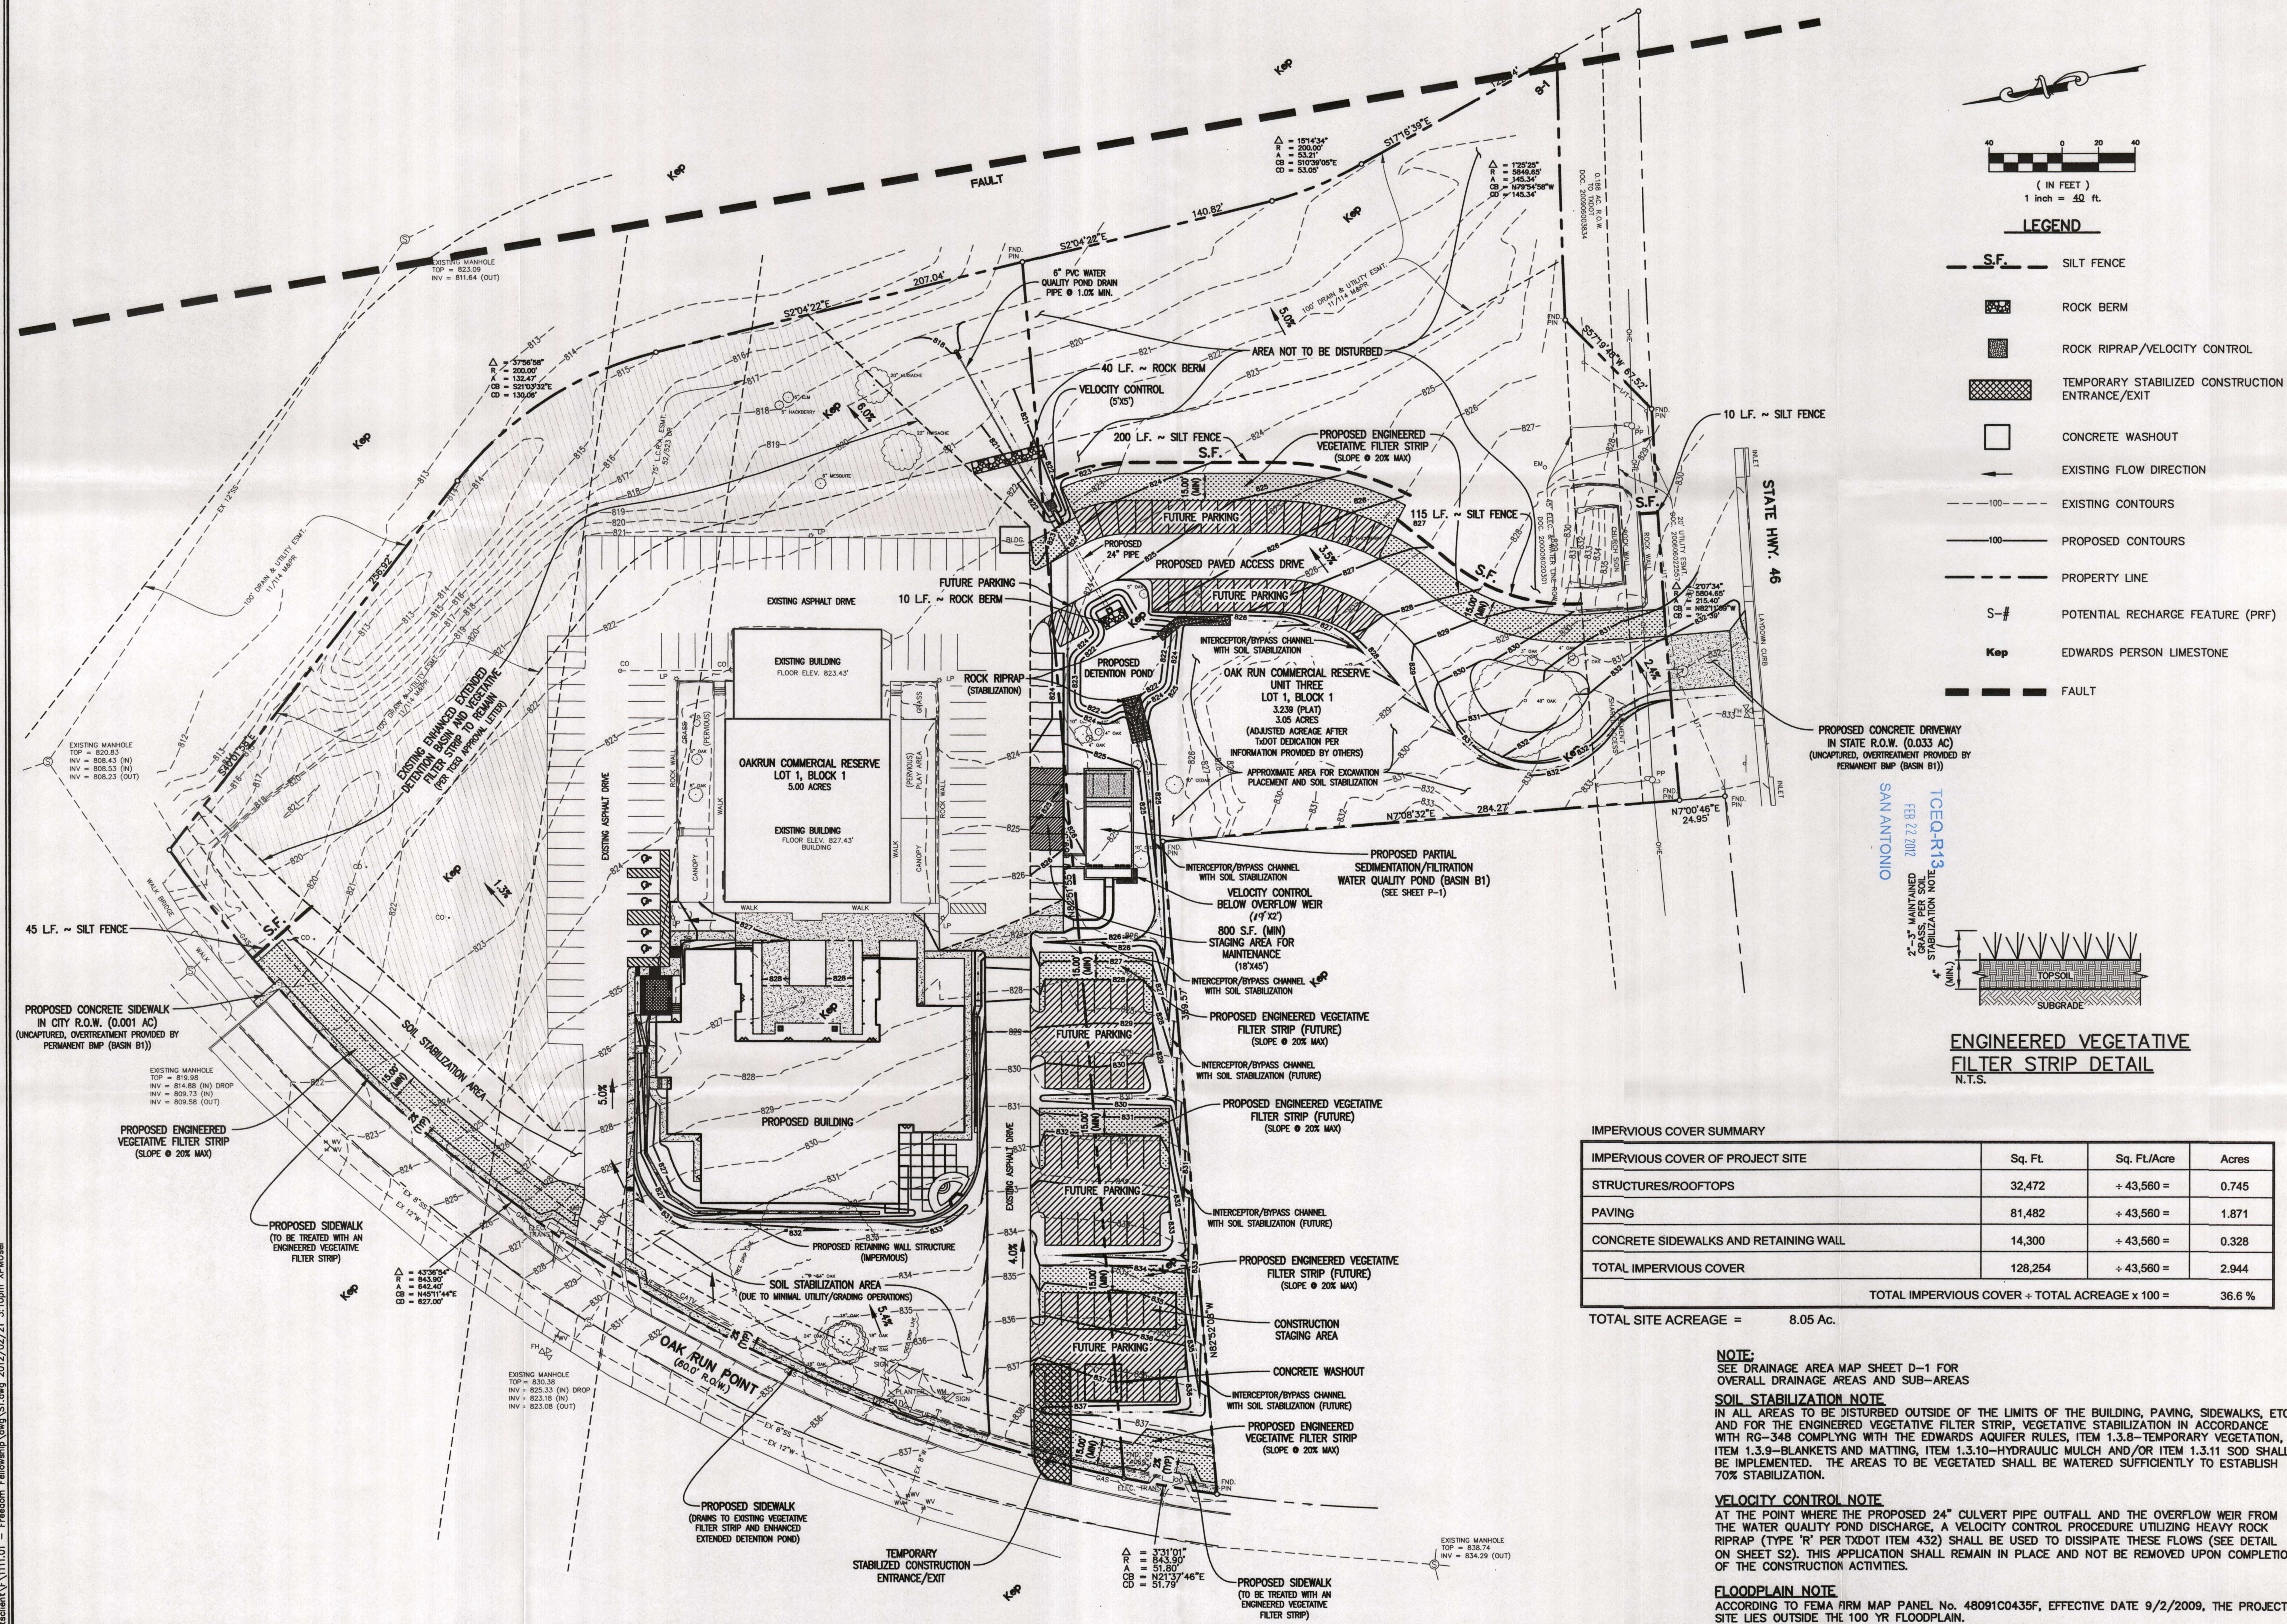[illegible]




Texas Commission on Environmental Quality  
Water Pollution Abatement Plan  
General Construction Notes


- Written construction notification must be given to the appropriate TCEQ regional office no later than 48 hours prior to commencement of the regulated activity. Information must include the date on which the regulated activity will commence, the name of the approved plan for the regulated activity, and the name of the prime contractor and the name and telephone number of the contact person.
- All contractors conducting regulated activities associated with this project must be provided with complete copies of the approved Water Pollution Abatement Plan and the TCEQ letter indicating the specific conditions of its approval. During the course of these regulated activities, the contractors are required to keep on-site copies of the approved plan and approval letter.
- If any sensitive feature is discovered during construction, all regulated activities near the sensitive feature must be suspended immediately. The appropriate TCEQ regional office must be immediately notified of any sensitive features encountered during construction. The regulated activities near the sensitive feature may not proceed until the TCEQ has reviewed and approved the methods proposed to protect the sensitive feature and the Edwards Aquifer from any potentially adverse impacts to water quality.
- No temporary aboveground hydrocarbon and hazardous substance storage tank system is installed within 150 feet of a domestic, industrial, irrigation, or public water supply well, or other sensitive feature.
- Prior to commencement of construction, all temporary erosion and sedimentation (E&S) control measures must be properly selected, installed, and maintained in accordance with the manufacturers specifications and good engineering practices. Controls specified in the temporary storm water section of the approved Edwards Aquifer Protection Plan are required during construction. If inspections indicate a control has been used inappropriately, or incorrectly, the applicant must replace or modify the control for site situations. The controls must remain in place until disturbed areas are revegetated and the areas have become permanently stabilized.
- If sediment escapes the construction site, off-site accumulations of sediment must be removed at a frequency sufficient to minimize offsite impacts to water quality (e.g., fugitive sediment in street being washed into surface streams or sensitive features by the next rain).
- Sediment must be removed from sediment traps or sedimentation ponds not later than when design capacity has been reduced by 50%. A permanent stake must be provided that can indicate when the sediment occupies 50% of the basin volume.
- Litter, construction debris, and construction chemicals exposed to stormwater shall be prevented from becoming a pollutant source for stormwater discharges (e.g., screening outfalls, picked up daily).
- All spoils (excavated material) generated from the project site must be stored on-site with proper E&S controls. For storage or disposal of spoils at another site on the Edwards Aquifer Recharge Zone, the owner of the site must receive approval of a water pollution abatement plan for the placement of fill material or mass grading prior to the placement of spoils at the other site.
- Stabilization measures shall be initiated as soon as practicable in portions of the site where construction activities have temporarily or permanently ceased, but in no case more than 14 days after the construction activity in that portion of the site has temporarily or permanently ceased. Where the initiation of stabilization measures by the 14th day after construction activity temporary or permanently cease is precluded by weather conditions, stabilization measures shall be initiated as soon as practicable. Where construction activity on a portion of the site is temporarily ceased, and earth disturbing activities will be resumed within 21 days, temporary stabilization measures do not have to be initiated on that portion of site. In areas experiencing droughts where the initiation of stabilization measures by the 14th day after construction activity has temporarily or permanently ceased is precluded by seasonal arid conditions, stabilization measures shall be initiated as soon as practicable.
- The following records shall be maintained and made available to the TCEQ upon request: the dates when major grading activities occur; the dates when construction activities temporarily or permanently cease on a portion of the site; and the dates when stabilization measures are initiated.
- The holder of any approved Edward Aquifer protection plan must notify the appropriate regional office in writing and obtain approval from the executive director prior to initiating any of the following:
  - any physical or operational modification of any water pollution abatement structure(s), including but not limited to ponds, dams, berms, sewage treatment plants, and diversionary structures;
  - any change in the nature or character of the regulated activity from that which was originally approved or a change which would significantly impact the ability of the plan to prevent pollution of the Edwards Aquifer;
  - any development of land previously identified as undeveloped in the original water pollution abatement plan.

Austin Regional Office  
2800 S. IH 35, Suite 100  
Austin, Texas 78704-5712  
Phone (512) 339-2929  
Fax (512) 339-3795


San Antonio Regional Office  
14250 Judson Road  
San Antonio, Texas 78233-4480  
Phone (210) 490-3096  
Fax (210) 545-4329

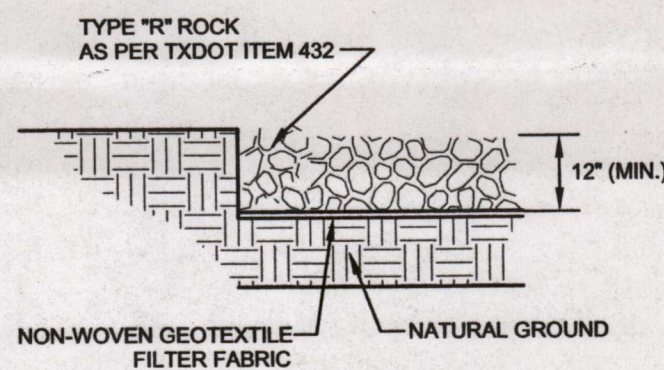

**ROCK RIPRAP DETAIL**  
N.T.S.

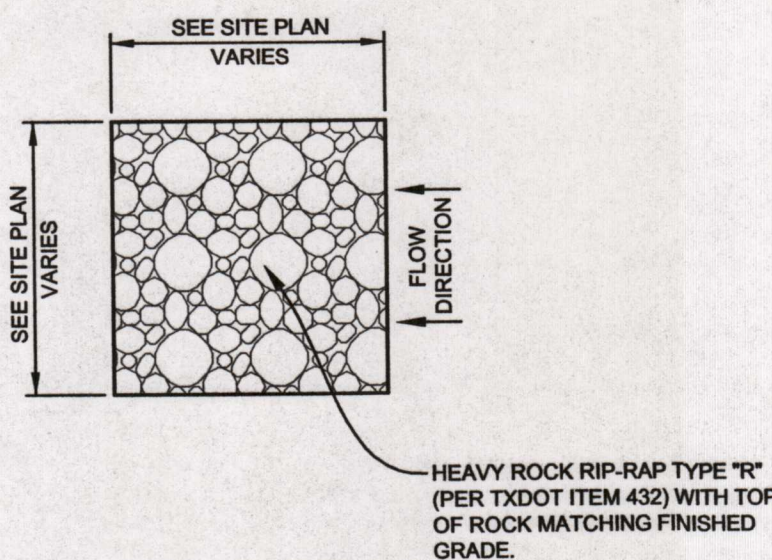

**VELOCITY CONTROL DETAIL**  
N.T.S.

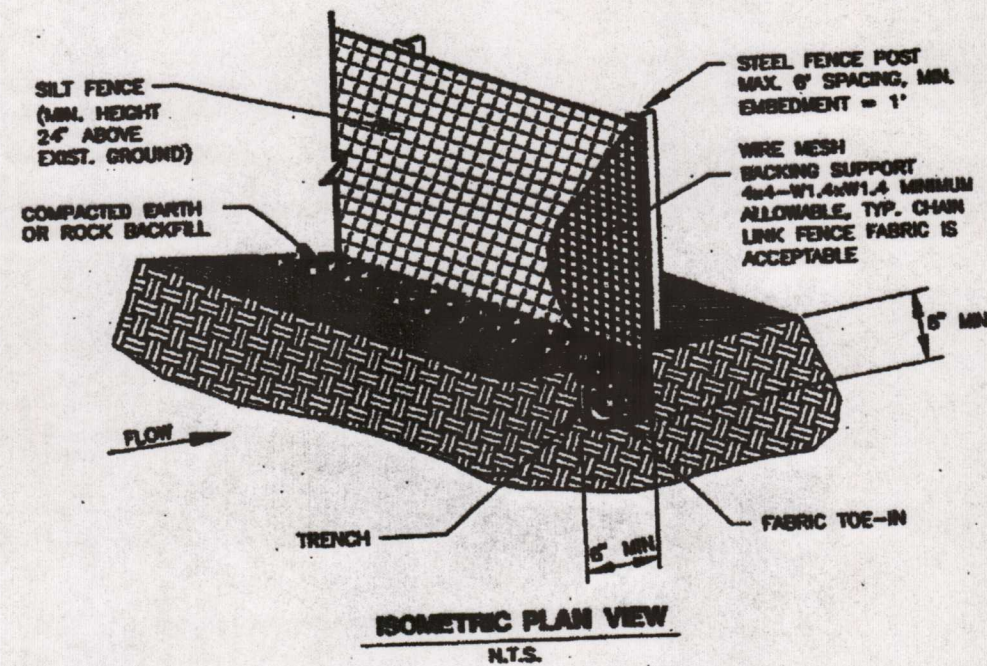


**Materials:**

- Silt fence material should be polypropylene, polyethylene or polyamide woven or nonwoven fabric. The fabric width should be 36 inches, with a minimum unit weight of 4.5 oz/yd, mullen burst strength exceeding 190 lb/in<sup>2</sup>, ultraviolet stability exceeding 70%, and minimum apparent opening size of U.S. Sieve No. 30.
- Fence posts should be made of hot rolled steel, at least 4 feet long with Tee or Y-bar cross section, surface painted or galvanized, minimum nominal weight 1.25 lb/R<sup>2</sup>, and Brinell hardness exceeding 140.
- Woven wire backing to support the fabric should be galvanized 2" x 4" welded wire, 12 gauge minimum.

**Installation:**

- Steel posts, which support the silt fence, should be installed on a slight angle toward the anticipated runoff source. Post must be embedded a minimum of 1-foot deep and spaced not more than 8 feet on center. Where water concentrates, the maximum spacing should be 6 feet.
- Lay out fencing down-slope of disturbed area, following the contour as closely as possible. The fence should be sited so that the maximum drainage area is 1/4 acre/100 feet of fence.
- The toe of the silt fence should be trenched in with a spade or mechanical trencher, so that the down-slope face of the trench is flat and perpendicular to the line of flow. Where fence cannot be trenched in (e.g., pavement or rock outcrop), weight fabric flap with 3 inches of pea gravel on uphill side to prevent flow from seeping under fence.
- The trench must be a minimum of 6 inches deep and 6 inches wide to allow for the silt fence fabric to be laid in the ground and backfilled with compacted material.
- Silt fence should be securely fastened to each steel support post or to woven wire, which is in turn attached to the steel fence post. There should be a 3-foot overlap, securely fastened where ends of fabric meet.
- Silt fence should be removed when the site is completely stabilized so as not to block or impede storm flow or drainage.

**SILT FENCE DETAIL**  
N.T.S.

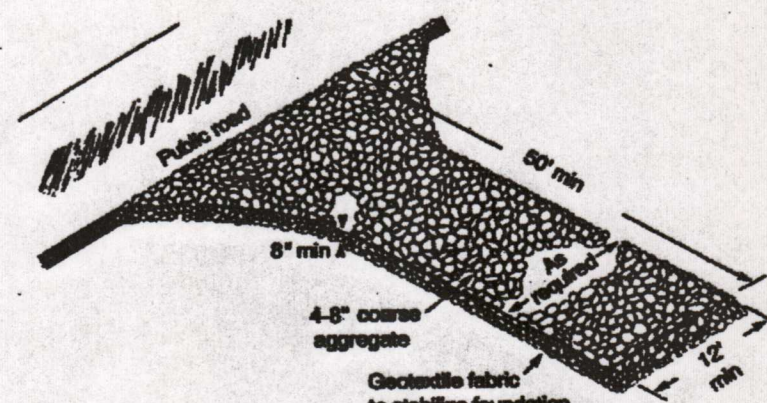

**Schematic of Temporary Construction Entrance/Exit**



**Cross-section of a Construction Entrance/Exit**



**Materials:**

- The aggregate should consist of 4 to 8 inch washed stone over a stable foundation as specified in the plan.
- The aggregate should be placed with a minimum thickness of 8 inches.
- The geotextile fabric should be designed specifically for use as a soil filtration media with an approximate weight of 6 oz/yd<sup>2</sup>, a mullen burst rating of 140 lb/in<sup>2</sup>, and an equivalent opening size greater than a number 50 sieve.
- If a washing facility is required, a level area with a minimum of 4 inch diameter washed stone or commercial rock should be included in the plans. Divert wastewater to a sediment trap or basin.

**Installation:**

- Avoid curves on public roads and steep slopes. Remove vegetation and other objectionable material from the foundation area. Grade crown foundation for positive drainage.
- The minimum width of the entrance/exit should be 12 feet or the full width of exit roadway, whichever is greater.
- The construction entrance should be at least 50 feet long.
- If the slope toward the road exceeds 2%, construct a ridge, 6 to 8 inches high with 3:1 (H:V) side slopes, across the foundation approximately 15 feet from the entrance to divert runoff away from the public road.
- Place geotextile fabric and grade foundation to improve stability, especially where wet conditions are anticipated.
- Place stone to dimensions and grade shown on plans. Leave surface smooth and slope for drainage.
- Divert all surface runoff and drainage from the stone pad to a sediment trap or basin.
- Install pipe under pad as needed to maintain proper public road drainage.



**TEMPORARY CONSTRUCTION ENTRANCE/EXIT DETAIL**  
N.T.S.

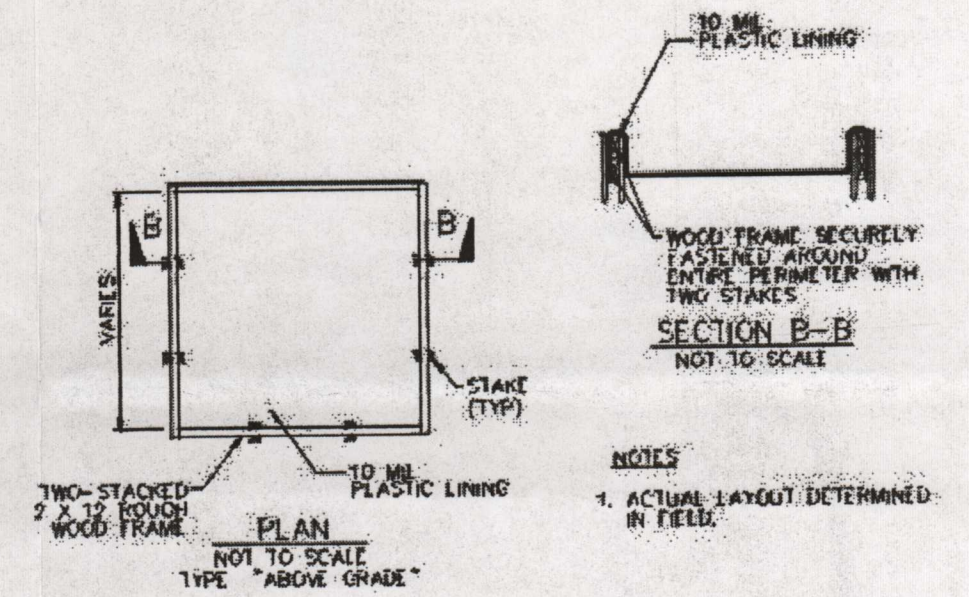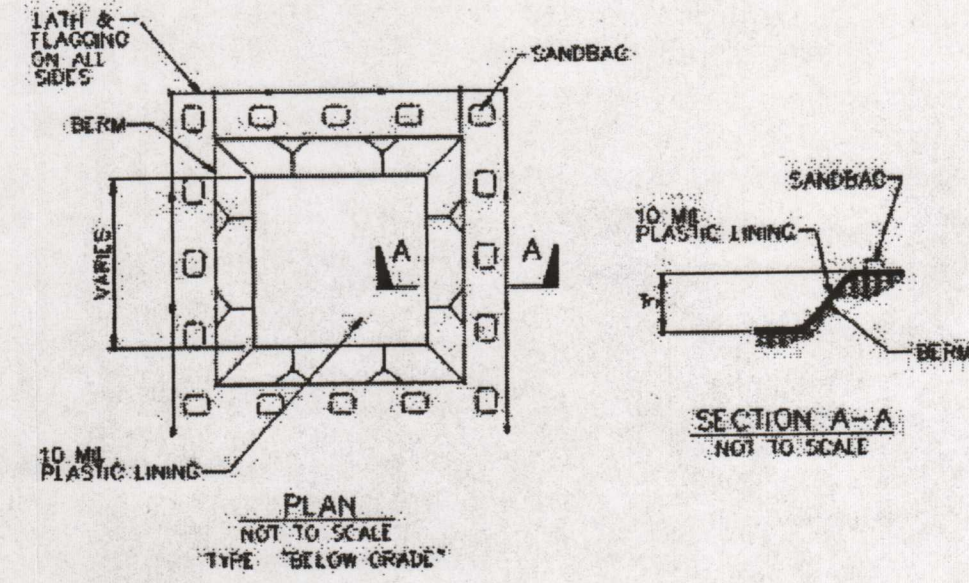

**FOR ON-SITE WASHOUT:**

- LOCATE WASHOUT AREA AT LEAST 50 FEET FROM SENSITIVE FEATURES, STORM DRAINS, OPEN DITCHES, OR WATER BODIES. DO NOT ALLOW RUNOFF FROM THIS AREA BY CONSTRUCTING A TEMPORARY PIT OR BERMED AREA LARGE ENOUGH FOR LIQUID AND SOLID WASTE.
- WASH OUT WASTES INTO THE TEMPORARY PIT WHERE THE CONCRETE CAN SET, BE BROKEN UP, AND THEN DISPOSED OF PROPERLY.
- PLASTIC LINING MATERIAL SHOULD BE A MINIMUM OF 10 MIL IN POLYETHYLENE SHEETING AND SHOULD BE FREE OF HOLES, TEARS, OR OTHER DEFECTS THAT COMPROMISE THE IMPERMEABILITY OF THE MATERIAL.
- WHEN TEMPORARY CONCRETE WASHOUT FACILITIES ARE NO LONGER REQUIRED FOR THE WORK, THE HARDENED CONCRETE SHOULD BE REMOVED AND DISPOSED OF PROPERLY. MATERIALS USED TO CONSTRUCT THE TEMPORARY CONCRETE WASHOUT FACILITIES SHOULD BE REMOVED FROM THE SITE OF THE WORK AND DISPOSED OF PROPERLY.
- HOLES, DEPRESSIONS OR OTHER GROUND DISTURBANCE CAUSED BY THE REMOVAL OF THE TEMPORARY CONCRETE WASHOUT FACILITIES SHOULD BE BACKFILLED AND REPAIRED.
- SEE TCEQ RG-348 SECTION 1.4.18 CONCRETE WASHOUT AREAS FOR ANY ADDITIONAL INFORMATION.

**CONCRETE WASHOUT DETAIL**  
N.T.S.

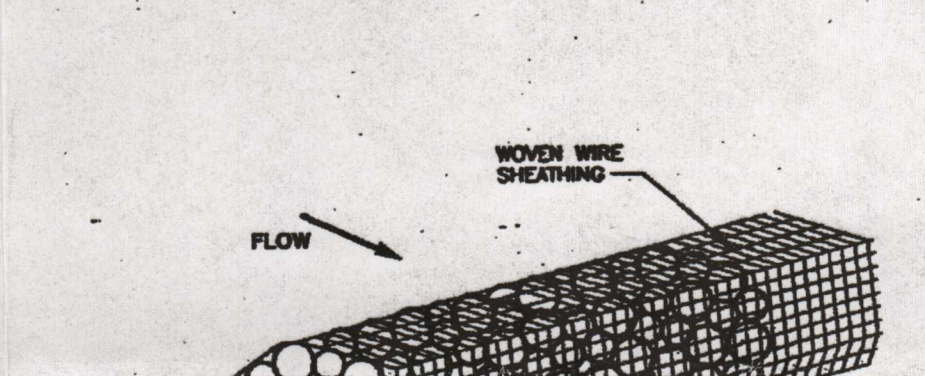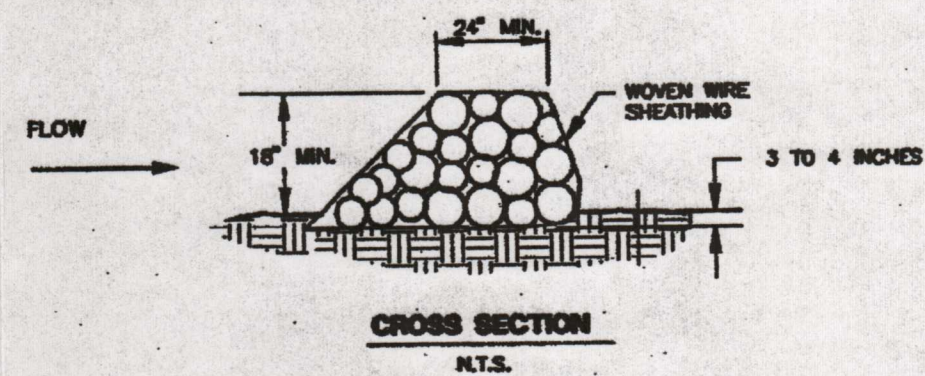

**Materials:**

- The berm structure should be secured with a woven wire sheathing having maximum opening of 1 inch and a minimum wire diameter of 20 gauge galvanized and should be secured with shoot rings.
- Clean, open graded 3- to 5-inch diameter rock should be used, except in areas where high velocities or large volumes of flow are expected, where 5- to 8-inch diameter rocks may be used.

**Installation:**

- Lay out the woven wire sheathing perpendicular to the flow line. The sheathing should be 20 gauge woven wire mesh with 1 inch openings.
- Berm should have a top width of 2 feet minimum with side slopes being 2:1 (H:V) or flatter.
- Place the rock along the sheathing as shown in the diagram (Figure 1-1), to a height not less than 18".
- Wrap the wire sheathing around the rock and secure with tie wire so that the ends of the sheathing overlap at least 2 inches, and the berm retains its shape when walked upon.
- Berm should be built along the contour at zero percent grade or as near as possible.
- The ends of the berm should be tied into existing upslope grade and the berm should be buried in a trench approximately 3 to 4 inches deep to prevent failure of the control.

**ROCK BERM DETAIL**  
N.T.S.



OWNER:  
FREEDOM FELLOWSHIP CHURCH  
410 OAK RUN POINT  
NEW BRAUNFELS, TX 78132

**WATER POLLUTION ABATEMENT PLAN  
GENERAL NOTES AND DETAILS**  
FOR  
FREEDOM FELLOWSHIP CHURCH  
COMAL COUNTY, TEXAS

REVISIONS		DESCRIPTION
DATE	BY	
DRAWN BY: D.G. III		CHECKED BY: J.J.M.
DATE: FEBRUARY 2012		
JOB NO.: 1111.01		
S2 OF 2		



**Temporary Stormwater Section**  
for Regulated Activities  
on the Edwards Aquifer Recharge Zone  
and Relating to 30 TAC §213.5(b)(4)(A), (B), (D)(I) and (G); Effective June 1, 1999

REGULATED ENTITY NAME: Freedom Fellowship Church

**POTENTIAL SOURCES OF CONTAMINATION**

Examples: Fuel storage and use, chemical storage and use, use of asphaltic products, construction vehicles tracking onto public roads, and existing solid waste.

1. Fuels for construction equipment and hazardous substances which will be used during construction:
  - ☐ Aboveground storage tanks with a cumulative storage capacity of less than 250 gallons will be stored on the site for less than one (1) year.
  - ☐ Aboveground storage tanks with a cumulative storage capacity between 250 gallons and 499 gallons will be stored on the site for less than one (1) year.
  - ☐ Aboveground storage tanks with a cumulative storage capacity of 500 gallons or more will be stored on the site. An **Aboveground Storage Tank Facility Plan** application must be submitted to the appropriate regional office of the TCEQ prior to moving the tanks onto the project.
  - ☒ Fuels and hazardous substances will not be stored on-site.
2. ☒ **ATTACHMENT A - Spill Response Actions.** A description of the measures to be taken to contain any spill of hydrocarbons or hazardous substances is provided at the end of this form.
3. ☒ Temporary aboveground storage tank systems of 250 gallons or more cumulative storage capacity must be located a minimum horizontal distance of 150 feet from any domestic, industrial, irrigation, or public water supply well, or other sensitive feature.
4. ☐ **ATTACHMENT B - Potential Sources of Contamination.** Describe in an attachment at the end of this form any other activities or processes which may be a potential source of contamination.
  - ☒ There are no other potential sources of contamination. (None anticipated beyond those listed as Examples under Potential Sources of Contamination shown above.)

**SEQUENCE OF CONSTRUCTION**

5. ☒ **ATTACHMENT C - Sequence of Major Activities.** A description of the sequence of major activities which will disturb soils for major portions of the site (grubbing, excavation, grading, utilities, and infrastructure installation) is provided at the end of this form. For each activity described, an estimate of the total area of the site to be disturbed by each activity is given.
6. ☒ Name the receiving water(s) at or near the site which will be disturbed or which will receive discharges from disturbed areas of the project: Tributary of Blieder's Creek



## TEMPORARY BEST MANAGEMENT PRACTICES (TBMPs)

Erosion control examples: tree protection, interceptor swales, level spreaders, outlet stabilization, blankets or matting, mulch, and sod. Sediment control examples: stabilized construction exit, silt fence, filter dikes, rock berms, buffer strips, sediment traps, and sediment basins. Please refer to the Technical Guidance Manual for guidelines and specifications. **All structural BMPs must be shown on the site plan.**

7. X **ATTACHMENT D - Temporary Best Management Practices and Measures.** A description of the TBMPs and measures that will be used during and after construction are provided at the end of this form. For each activity listed in the sequence of construction, include appropriate control measures and the general timing (or sequence) during the construction process that the measures will be implemented.

X TBMPs and measures will prevent pollution of surface water, groundwater, and stormwater. The construction-phase BMPs for erosion and sediment controls have been designed to retain sediment on site to the extent practicable. The following information has been provided in the attachment at the end of this form

- a. A description of how BMPs and measures will prevent pollution of surface water, groundwater or stormwater that originates upgradient from the site and flows across the site.
  - b. A description of how BMPs and measures will prevent pollution of surface water or groundwater that originates on-site or flows off site, including pollution caused by contaminated stormwater runoff from the site.
  - c. A description of how BMPs and measures will prevent pollutants from entering surface streams, sensitive features, or the aquifer.
  - d. A description of how, to the maximum extent practicable, BMPs and measures will maintain flow to naturally-occurring sensitive features identified in either the geologic assessment, TCEQ inspections, or during excavation, blasting, or construction.
8. The temporary sealing of a naturally-occurring sensitive feature which accepts recharge to the Edwards Aquifer as a temporary pollution abatement measure during active construction should be avoided.

   **ATTACHMENT E - Request to Temporarily Seal a Feature.** A request to temporarily seal a feature is provided at the end of this form. The request includes justification as to why no reasonable and practicable alternative exists for each feature.

X There will be no temporary sealing of naturally-occurring sensitive features on the site.

9. X **ATTACHMENT F - Structural Practices.** Describe the structural practices that will be used to divert flows away from exposed soils, to store flows, or to otherwise limit runoff discharge of pollutants from exposed areas of the site. Placement of structural practices in floodplains has been avoided.



10. X **ATTACHMENT G - Drainage Area Map.** A drainage area map is provided at the end of this form to support the following requirements.
- For areas that will have more than 10 acres within a common drainage area disturbed at one time, a sediment basin will be provided.
  - For areas that will have more than 10 acres within a common drainage area disturbed at one time, a smaller sediment basin and/or sediment trap(s) will be used.
  - For areas that will have more than 10 acres within a common drainage area disturbed at one time, a sediment basin or other equivalent controls are not attainable, but other TBMPs and measures will be used in combination to protect down slope and side slope boundaries of the construction area.
  - X There are no areas greater than 10 acres within a common drainage area that will be disturbed at one time. A smaller sediment basin and/or sediment trap(s) will be used in combination with other erosion and sediment controls within each disturbed drainage area.
11. N/A **ATTACHMENT H - Temporary Sediment Pond(s) Plans and Calculations.** Temporary sediment pond or basin construction plans and design calculations for a proposed temporary BMP or measure has been prepared by or under the direct supervision of a Texas Licensed Professional Engineer. All construction plans and design information must be signed, sealed, and dated by the Texas Licensed Professional Engineer. Construction plans for the proposed temporary BMPs and measures are provided as at the end of this form.
12. X **ATTACHMENT I - Inspection and Maintenance for BMPs.** A plan for the inspection of temporary BMPs and measures and for their timely maintenance, repair, and, if necessary, retrofit is provided at the end of this form. A description of documentation procedures and recordkeeping practices is included in the plan.
13. X All control measures must be properly selected, installed, and maintained in accordance with the manufacturers specifications and good engineering practices. If periodic inspections by the applicant or the executive director, or other information indicates a control has been used inappropriately, or incorrectly, the applicant must replace or modify the control for site situations.
14. X If sediment escapes the construction site, off-site accumulations of sediment must be removed at a frequency sufficient to minimize offsite impacts to water quality (e.g., fugitive sediment in street being washed into surface streams or sensitive features by the next rain).
15. N/A Sediment must be removed from sediment traps or sedimentation ponds not later than when design capacity has been reduced by 50%. A permanent stake will be provided that can indicate when the sediment occupies 50% of the basin volume.
16. X Litter, construction debris, and construction chemicals exposed to stormwater shall be prevented from becoming a pollutant source for stormwater discharges (e.g., screening outfalls, picked up daily).



### SOIL STABILIZATION PRACTICES

Examples: establishment of temporary vegetation, establishment of permanent vegetation, mulching, geotextiles, sod stabilization, vegetative buffer strips, protection of trees, or preservation of mature vegetation.

17. X **ATTACHMENT J - Schedule of Interim and Permanent Soil Stabilization Practices.**  
A schedule of the interim and permanent soil stabilization practices for the site is attached at the end of this form.
18. X Records must be kept at the site of the dates when major grading activities occur, the dates when construction activities temporarily or permanently cease on a portion of the site, and the dates when stabilization measures are initiated.
19. X Stabilization practices must be initiated as soon as practicable where construction activities have temporarily or permanently ceased.

### ADMINISTRATIVE INFORMATION

20. X All structural controls will be inspected and maintained according to the submitted and approved operation and maintenance plan for the project.
21. X If any geologic or manmade features, such as caves, faults, sinkholes, etc., are discovered, all regulated activities near the feature will be immediately suspended. The appropriate TCEQ Regional Office shall be immediately notified. Regulated activities must cease and not continue until the TCEQ has reviewed and approved the methods proposed to protect the aquifer from any adverse impacts.
22. X Silt fences, diversion berms, and other temporary erosion and sediment controls will be constructed and maintained as appropriate to prevent pollutants from entering sensitive features discovered during construction.

To the best of my knowledge, the responses to this form accurately reflect all information requested concerning the proposed regulated activities and methods to protect the Edwards Aquifer. This **TEMPORARY STORMWATER SECTION** is hereby submitted for TCEQ review and executive director approval. The application was prepared by:

John J. Moy, Jr.

Print Name of Customer/Agent

  
Signature of Customer/Agent

2/21/12  
Date



## **TEMPORARY STORMWATER SECTION**

### **2. Attachment A – Spill Response Actions**

Regarding spill prevention and control, found directly behind this sheet is copy of Section 1.4.16 of the Texas Commission on Environmental Quality (TCEQ) "Complying with the Edwards Aquifer Rules Technical Guidance on Best Management Practices, pages 1-118 through 1-121, Spill Prevention and Control which covers necessary procedures for spill prevention and control. In the event of a significant or hazardous spill (per the attached TCEQ criteria and guidelines) the contractor or construction personnel shall notify the TCEQ by telephone as soon as possible and within 24 hours at (512) 339-2929 (Austin) or (210) 490-3096 (San Antonio) between 8 am and 5 pm. After hours, contact the Environmental Release Hotline at 1-800-832-8224. It is the contractor's responsibility to have all emergency phone numbers at the construction site.

(See Spill Prevention and Control information on the following sheets)





RG-348  
Revised July 2005

# Complying with the Edwards Aquifer Rules Technical Guidance on Best Management Practices

printed on  
recycled paper

Field Operations Division

---

TEXAS COMMISSION ON ENVIRONMENTAL QUALITY



#### 1.4.16 Spill Prevention and Control

The objective of this section is to describe measures to prevent or reduce the discharge of pollutants to drainage systems or watercourses from leaks and spills by reducing the chance for spills, stopping the source of spills, containing and cleaning up spills, properly disposing of spill materials, and training employees.

The following steps will help reduce the stormwater impacts of leaks and spills:

##### ***Education***

- (1) Be aware that different materials pollute in different amounts. Make sure that each employee knows what a “significant spill” is for each material they use, and what is the appropriate response for “significant” and “insignificant” spills. Employees should also be aware of when spill must be reported to the TCEQ. Information available in 30 TAC 327.4 and 40 CFR 302.4.
- (2) Educate employees and subcontractors on potential dangers to humans and the environment from spills and leaks.
- (3) Hold regular meetings to discuss and reinforce appropriate disposal procedures (incorporate into regular safety meetings).
- (4) Establish a continuing education program to indoctrinate new employees.
- (5) Have contractor’s superintendent or representative oversee and enforce proper spill prevention and control measures.

##### ***General Measures***

- (1) To the extent that the work can be accomplished safely, spills of oil, petroleum products, substances listed under 40 CFR parts 110,117, and 302, and sanitary and septic wastes should be contained and cleaned up immediately.
- (2) Store hazardous materials and wastes in covered containers and protect from vandalism.
- (3) Place a stockpile of spill cleanup materials where it will be readily accessible.
- (4) Train employees in spill prevention and cleanup.
- (5) Designate responsible individuals to oversee and enforce control measures.
- (6) Spills should be covered and protected from stormwater runoff during rainfall to the extent that it doesn’t compromise clean up activities.
- (7) Do not bury or wash spills with water.



- (8) Store and dispose of used clean up materials, contaminated materials, and recovered spill material that is no longer suitable for the intended purpose in conformance with the provisions in applicable BMPs.
- (9) Do not allow water used for cleaning and decontamination to enter storm drains or watercourses. Collect and dispose of contaminated water in accordance with applicable regulations.
- (10) Contain water overflow or minor water spillage and do not allow it to discharge into drainage facilities or watercourses.
- (11) Place Material Safety Data Sheets (MSDS), as well as proper storage, cleanup, and spill reporting instructions for hazardous materials stored or used on the project site in an open, conspicuous, and accessible location.
- (12) Keep waste storage areas clean, well organized, and equipped with ample cleanup supplies as appropriate for the materials being stored. Perimeter controls, containment structures, covers, and liners should be repaired or replaced as needed to maintain proper function.

#### ***Cleanup***

- (1) Clean up leaks and spills immediately.
- (2) Use a rag for small spills on paved surfaces, a damp mop for general cleanup, and absorbent material for larger spills. If the spilled material is hazardous, then the used cleanup materials are also hazardous and must be disposed of as hazardous waste.
- (3) Never hose down or bury dry material spills. Clean up as much of the material as possible and dispose of properly. See the waste management BMPs in this section for specific information.

#### ***Minor Spills***

- (1) Minor spills typically involve small quantities of oil, gasoline, paint, etc. which can be controlled by the first responder at the discovery of the spill.
- (2) Use absorbent materials on small spills rather than hosing down or burying the spill.
- (3) Absorbent materials should be promptly removed and disposed of properly.
- (4) Follow the practice below for a minor spill:
- (5) Contain the spread of the spill.
- (6) Recover spilled materials.
- (7) Clean the contaminated area and properly dispose of contaminated materials.



### ***Semi-Significant Spills***

Semi-significant spills still can be controlled by the first responder along with the aid of other personnel such as laborers and the foreman, etc. This response may require the cessation of all other activities.

Spills should be cleaned up immediately:

- (1) Contain spread of the spill.
- (2) Notify the project foreman immediately.
- (3) If the spill occurs on paved or impermeable surfaces, clean up using "dry" methods (absorbent materials, cat litter and/or rags). Contain the spill by encircling with absorbent materials and do not let the spill spread widely.
- (4) If the spill occurs in dirt areas, immediately contain the spill by constructing an earthen dike. Dig up and properly dispose of contaminated soil.
- (5) If the spill occurs during rain, cover spill with tarps or other material to prevent contaminating runoff.

### ***Significant/Hazardous Spills***

For significant or hazardous spills that are in reportable quantities:

- (1) Notify the TCEQ by telephone as soon as possible and within 24 hours at 512-339-2929 (Austin) or 210-490-3096 (San Antonio) between 8 AM and 5 PM. After hours, contact the Environmental Release Hotline at 1-800-832-8224. It is the contractor's responsibility to have all emergency phone numbers at the construction site.
- (2) For spills of federal reportable quantities, in conformance with the requirements in 40 CFR parts 110, 119, and 302, the contractor should notify the National Response Center at (800) 424-8802.
- (3) Notification should first be made by telephone and followed up with a written report.
- (4) The services of a spills contractor or a Haz-Mat team should be obtained immediately. Construction personnel should not attempt to clean up until the appropriate and qualified staffs have arrived at the job site.
- (5) Other agencies which may need to be consulted include, but are not limited to, the City Police Department, County Sheriff Office, Fire Departments, etc.

More information on spill rules and appropriate responses is available on the TCEQ website at: [http://www.tnrcc.state.tx.us/enforcement/emergency\\_response.html](http://www.tnrcc.state.tx.us/enforcement/emergency_response.html)



### ***Vehicle and Equipment Maintenance***

- (1) If maintenance must occur onsite, use a designated area and a secondary containment, located away from drainage courses, to prevent the runoff of stormwater and the runoff of spills.
- (2) Regularly inspect onsite vehicles and equipment for leaks and repair immediately.
- (3) Check incoming vehicles and equipment (including delivery trucks, and employee and subcontractor vehicles) for leaking oil and fluids. Do not allow leaking vehicles or equipment onsite.
- (4) Always use secondary containment, such as a drain pan or drop cloth, to catch spills or leaks when removing or changing fluids.
- (5) Place drip pans or absorbent materials under paving equipment when not in use.
- (6) Use absorbent materials on small spills rather than hosing down or burying the spill. Remove the absorbent materials promptly and dispose of properly.
- (7) Promptly transfer used fluids to the proper waste or recycling drums. Don't leave full drip pans or other open containers lying around.
- (8) Oil filters disposed of in trashcans or dumpsters can leak oil and pollute stormwater. Place the oil filter in a funnel over a waste oil-recycling drum to drain excess oil before disposal. Oil filters can also be recycled. Ask the oil supplier or recycler about recycling oil filters.
- (9) Store cracked batteries in a non-leaking secondary container. Do this with all cracked batteries even if you think all the acid has drained out. If you drop a battery, treat it as if it is cracked. Put it into the containment area until you are sure it is not leaking.

### ***Vehicle and Equipment Fueling***

- (1) If fueling must occur on site, use designated areas, located away from drainage courses, to prevent the runoff of stormwater and the runoff of spills.
- (2) Discourage "topping off" of fuel tanks.
- (3) Always use secondary containment, such as a drain pan, when fueling to catch spills/ leaks.



**5. Attachment C – Sequence of Major Activities**

The following is a sequence of major activities which will involve soil disturbance along with an estimate of the area of the site to be disturbed by each activity:

Sequence No.	Description of Soil Disturbing Activity	Estimated Area to be Disturbed by each Activity (Acres ~ Total)
1	Clearing/Grubbing/Construction Staging (For Proposed Building Area)	0.85
2	Clearing/Grubbing (For Proposed Water Quality Basin, Detention Pond, Access Drive, Sidewalks & Interceptor Drains)	1.10
3	Excavation and Grading (Proposed Building, Water Quality Pond, Access Drive, Sidewalks, Detention Pond & Interceptor Drains)	1.95
4	Final Paving and Sidewalks	0.45

**7. Attachment D – Temporary Best Management Practices and Measures**

The Temporary Best Management Practices (TBMP's) that will be used for this development are rock berms, silt fences, a concrete washout area and a temporary construction entrance/exit in accordance with the Site Plan. The temporary controls (i.e. rock berms, silt fences, temporary construction entrance/exit and the concrete washout area) shall be in place prior to construction activities and will be maintained by the contractor during construction. The controls shall be removed by the contractor when vegetation is established on all exposed or disturbed areas.

- a. There is a drainage area that originates off-site and flows onto the project site, Drainage Area C1 (see Drainage Area Map, Sheet D1). This water will enter the site and then be conveyed around the disturbed areas via interceptor channels/by-pass drains. These interceptor drains/by-pass drains outfall into the proposed detention pond where a rock berm will be installed at the pond outfall. Located just below the outlet pipe of the detention pond will be a temporary rock berm and a permanent velocity control measure consisting of rock riprap which will be applied to reduce the velocity of the concentrated flow. Therefore off-site water required to enter the site will be treated by temporary rock berms prior to exiting the site.



- b. The stormwater that originates on-site will be controlled and filtered by rock berms and silt fences on the down gradient side of the areas of disturbance. The rock berms and silt fences will reduce the velocity of the water and allow the sediment to settle out and be trapped by the control device. After a significant rainfall event, it will be the contractor's responsibility to remove the sediment and debris that is captured.
- c. The BMP's will prevent pollutants from entering surface streams, sensitive features (no sensitive features present on this site), or the aquifer by capturing the silts and sediments through the utilization of the previously mentioned control devices such as silt fences and rock berms. These devices are located such that they capture the silts and sediment prior to entering the surface streams, etc. where they would otherwise be carried downstream. The settlement of the silts and sediment is due to the reduction of the velocity of the water.
- d. There were no sensitive features located on the site. However, previously described temporary measures will be maintained and incorporated where necessary to prevent contamination of stormwater runoff. In the event a sensitive feature is discovered during construction, the contractor or construction personnel shall notify the TCEQ by telephone as soon as possible and within 24 hours at (512) 339-2929 (Austin) or (210) 490-3096 (San Antonio) between 8 am and 5 pm. At that point an assessment will be made with the TCEQ as to how to best protect what was discovered.

## **9. Attachment F – Structural Practices**

The structural practices that will be used for temporary erosion/sediment control for this development are rock berms, silt fences, temporary construction entrance/exits, and a concrete washout area. The rock berms and silt fences will allow the silts and sediment to settle out prior to discharging into surface streams or sensitive features (no sensitive features present on this site). As mentioned previously, there is a proposed detention pond being constructed for a portion of the site and this detention pond will aid in the sedimentation of solids and improve the overall water quality.

## **10. Attachment G – Drainage Area Map**

The drainage area map can be found at the end of this section.



12. **Attachment I – Inspection and Maintenance for BMP's**

**A. Rock Berm Inspection and Maintenance Guidelines:**

- 1) Inspection shall be made weekly and after each rainfall by the contractor.
- 2) All debris and sediment shall be removed when buildup reaches 6 inches and this accumulated debris/sediment shall be disposed in an approved site and in a manner as to not introduce additional siltation.
- 3) Any loose wire sheathing shall be repaired.
- 4) During the inspection, the berm shall be reshaped as needed.
- 5) The berm shall be replaced when the structure does not function as intended due to silt accumulation, construction traffic, etc.
- 6) The rock berm shall be left in place until all upstream disturbed areas are stabilized and the accumulated silt has been removed.

**B. Silt Fence Inspection and Maintenance Guidelines:**

- 1) Inspection shall be made weekly and after each rainfall by the contractor.
- 2) All sediment shall be removed when buildup reaches 6 inches.
- 3) Any torn fabric shall be replaced or a new line of fencing shall be installed parallel to the torn section.
- 4) Replace or repair areas of silt fence that have been damaged due to construction activity, vehicular access, etc. and if the silt fence is located in an area of high construction traffic, relocate to an area that will provide equal protection but will not obstruct vehicular movements.

**C. Temporary Construction Entrance/Exit:**

- 1) The entrance shall be maintained in a way that will prevent tracking of sediment onto the public right-of-way.
- 2) Any sediment dropped, spilled, washed or tracked on to the public right of way shall be immediately removed by the contractor.
- 3) When applicable, wheels shall be washed to removed sediment prior to exiting the construction site.
- 4) When washing is required it shall be performed in an area that is stabilized/protected to prevent sediment from entering any public right of ways, streams or sensitive areas.



#### **D. Concrete Washout Area Inspection and Maintenance Guidelines:**

- 1) Inspection shall be made weekly and after each rainfall by the contractor.
- 2) When concrete accumulates 6 inches in depth, the concrete shall be broken up, removed and disposed of properly.
- 3) All controls around the perimeter of the washout area shall be checked, maintained and repaired as needed.
- 4) Upon completion of construction, the concrete washout area shall be cleaned and all concrete shall be removed and disposed of properly. Holes, depressions or other ground disturbance caused by the removal of the temporary concrete washout facility shall be backfilled and repaired.



## TEMPORARY CONSTRUCTION ENTRANCE/EXIT INSPECTION FORM

Inspection Date: \_\_\_\_\_

Signature: \_\_\_\_\_

### General Notes

- 1) Stone Size – 4 to 8 inches crushed rock
- 2) Length – as effective, but not less than 50 feet.
- 3) Thickness – not less than 8 inches.
- 4) Width – not less than 12 feet.
- 5) Washing – when necessary, wheels shall be cleaned to remove sediment prior to access onto the public roadway. When washing is required, it shall be done so that no sediment leaves the site/development. All unfiltered sediment shall be prevented from entering any storm drain, ditch or watercourse.
- 6) Maintenance – the entrance shall be maintained in a condition which will prevent tracking of sediment onto the public roadways. This may require periodic addition of stones as necessary, repair and/or cleanout of any measures used to trap sediment. All sediment spilled, dropped, washed or tracked onto the public roadway must be removed immediately.
- 7) Drainage – the entrance must be properly graded to prevent runoff from leaving the construction site.

	Yes	No	Comment
Is sediment present on the roadway?			
Is the gravel clean and working properly (relatively free of mud/sediment)?			
Does all traffic use the stabilized entrance to leave the site?			

Maintenance Required for Temporary Construction Entrance/Exit:

---

---

---

---

To Be Performed by: \_\_\_\_\_ On or Before: \_\_\_\_\_



## SILT FENCE INSPECTION FORM

Inspection Date: \_\_\_\_\_

Signature: \_\_\_\_\_

### General Notes:

- 1) The steel posts which support the silt fence shall be installed on a slight angle toward the anticipated runoff source. Posts must be embedded a minimum of one foot deep and spaced not more than 6 feet on center.
- 2) The toe of the silt fence shall be trenched in with a spade or mechanical trencher.
- 3) The trench must be a minimum of 6 inches deep and 6 inches wide to allow for the silt fence fabric to be laid in the ground and backfilled and compacted.
- 4) Silt fence should be securely fastened to each steel support post and to woven wire, which in turn is attached to the steel fence post. There shall be a 3 foot double overlap, securely fastened where ends of fabric meet.
- 5) Silt fence shall be removed when the site is completely stabilized so as not to block or impede storm flow or drainage.
- 6) Accumulated silt shall be removed when it reaches a depth of 6 inches. The silt shall be disposed of in an approved site and in such a manner as to not contribute additional silt.

	Yes	No	Comment
Is the bottom of the fabric still buried/secured?			
Is the fabric torn, missing or sagging?			
Are the post tipped over?			
How deep is the sediment?			

### Maintenance Required for Silt Fence:

---

---

---

---

To Be Performed by: \_\_\_\_\_ On or Before: \_\_\_\_\_



## ROCK BERMS INSPECTION FORM

Inspection Date: \_\_\_\_\_

Signature: \_\_\_\_\_

**General Notes:**

- 1) The woven wire sheathing shall be perpendicular to the flow line and the sheathing shall be 20 gauge woven wire mesh with 1 inch openings.
- 2) The berm shall have a top width of 24 inches with side slopes being 2:1 (H:V) or flatter.
- 3) Placement of the rock along the sheathing shall not be less than 18 inches.
- 4) The wire sheathing shall be wrapped around the rock and secured with tie wire so that the ends of the sheathing overlap at least 2 inches, and the berm retains its shape when walked upon.
- 5) The berm shall be built along the contour at zero percent grade or as near as possible.
- 6) The ends of the berm shall be tied into the existing upslope grade and the berm shall be buried in a trench approximately 3 to 4 inches deep to prevent failure of the control.

	Yes	No	Comment
Is the berm a minimum of 18 inches high?			
Does the berm have a top width of 24 inches?			
Is the level of sediment/silt greater than 6 inches?			
Does the rock berm need repair?			

**Maintenance Required for Rock Berms:**

---

---

---

---

To Be Performed by: \_\_\_\_\_ On or Before: \_\_\_\_\_



## CONCRETE WASHOUT AREA INSPECTION FORM

Inspection Date: \_\_\_\_\_

Signature: \_\_\_\_\_

General Notes:

- 1) The concrete washout shall be located at least 50 feet from sensitive features, storm drains, open ditches or water bodies.
- 2) The containment area shall be maintained such that there is no concrete or sediment escaping the containment area and shall be lined with 10 mil plastic.
- 3) Concrete wash out wastes shall be allowed to set, be broken up, and then disposed of properly.

	Yes	No	Comment
Is the concrete washout located near any sensitive features, storm drains, open ditches or water bodies?			
Is the containment area secured and working properly?			
Is there a plastic lining?			
Does the washout area need to be cleaned from too much old concrete?			

Maintenance Required for Concrete Washout Area:

---

---

---

---

To Be Performed by: \_\_\_\_\_ On or Before: \_\_\_\_\_



**17. Attachment J – Schedule of Interim and Permanent Soil Stabilization Practices**

**A. Temporary Stabilization**

No bare ground exposed during construction will be left to stabilize naturally. Any disturbed area where construction activities have ceased, permanently or temporarily, the contractor shall initiate temporary stabilization of the area by the use of seeding and mulching within 14 days, except in areas where construction activities are scheduled to resume within 21 days. The temporary seeding will consist of Buffalograss, Green Sprangletop and Bermuda Grass with straw or cedar mulch applied on final layer in accordance with TxDOT Item 164 – Seeding for Erosion Control. Based on the growing season at the time of construction, mixture and application rates may be modified by the engineer.


**B. Permanent Stabilization**

All disturbed portions of the site where construction activity permanently ceases shall be stabilized with permanent seed no later than 14 days after the last construction activity. The permanent seed mix shall consist of Bermuda Grass, Green Sprangletop and Buffalo Grass with straw or cedar mulch applied on the final layer in accordance with TxDOT Item 164 – Seeding for Erosion Control. Depending on the growing season at the time of construction, the mixture and application rates may be modified. It shall be the contractor's responsibility to sufficiently water the areas to be vegetated to achieve 70% stabilization.




**ATTACHMENT G**  
**MASTER DRAINAGE AREA MAP**



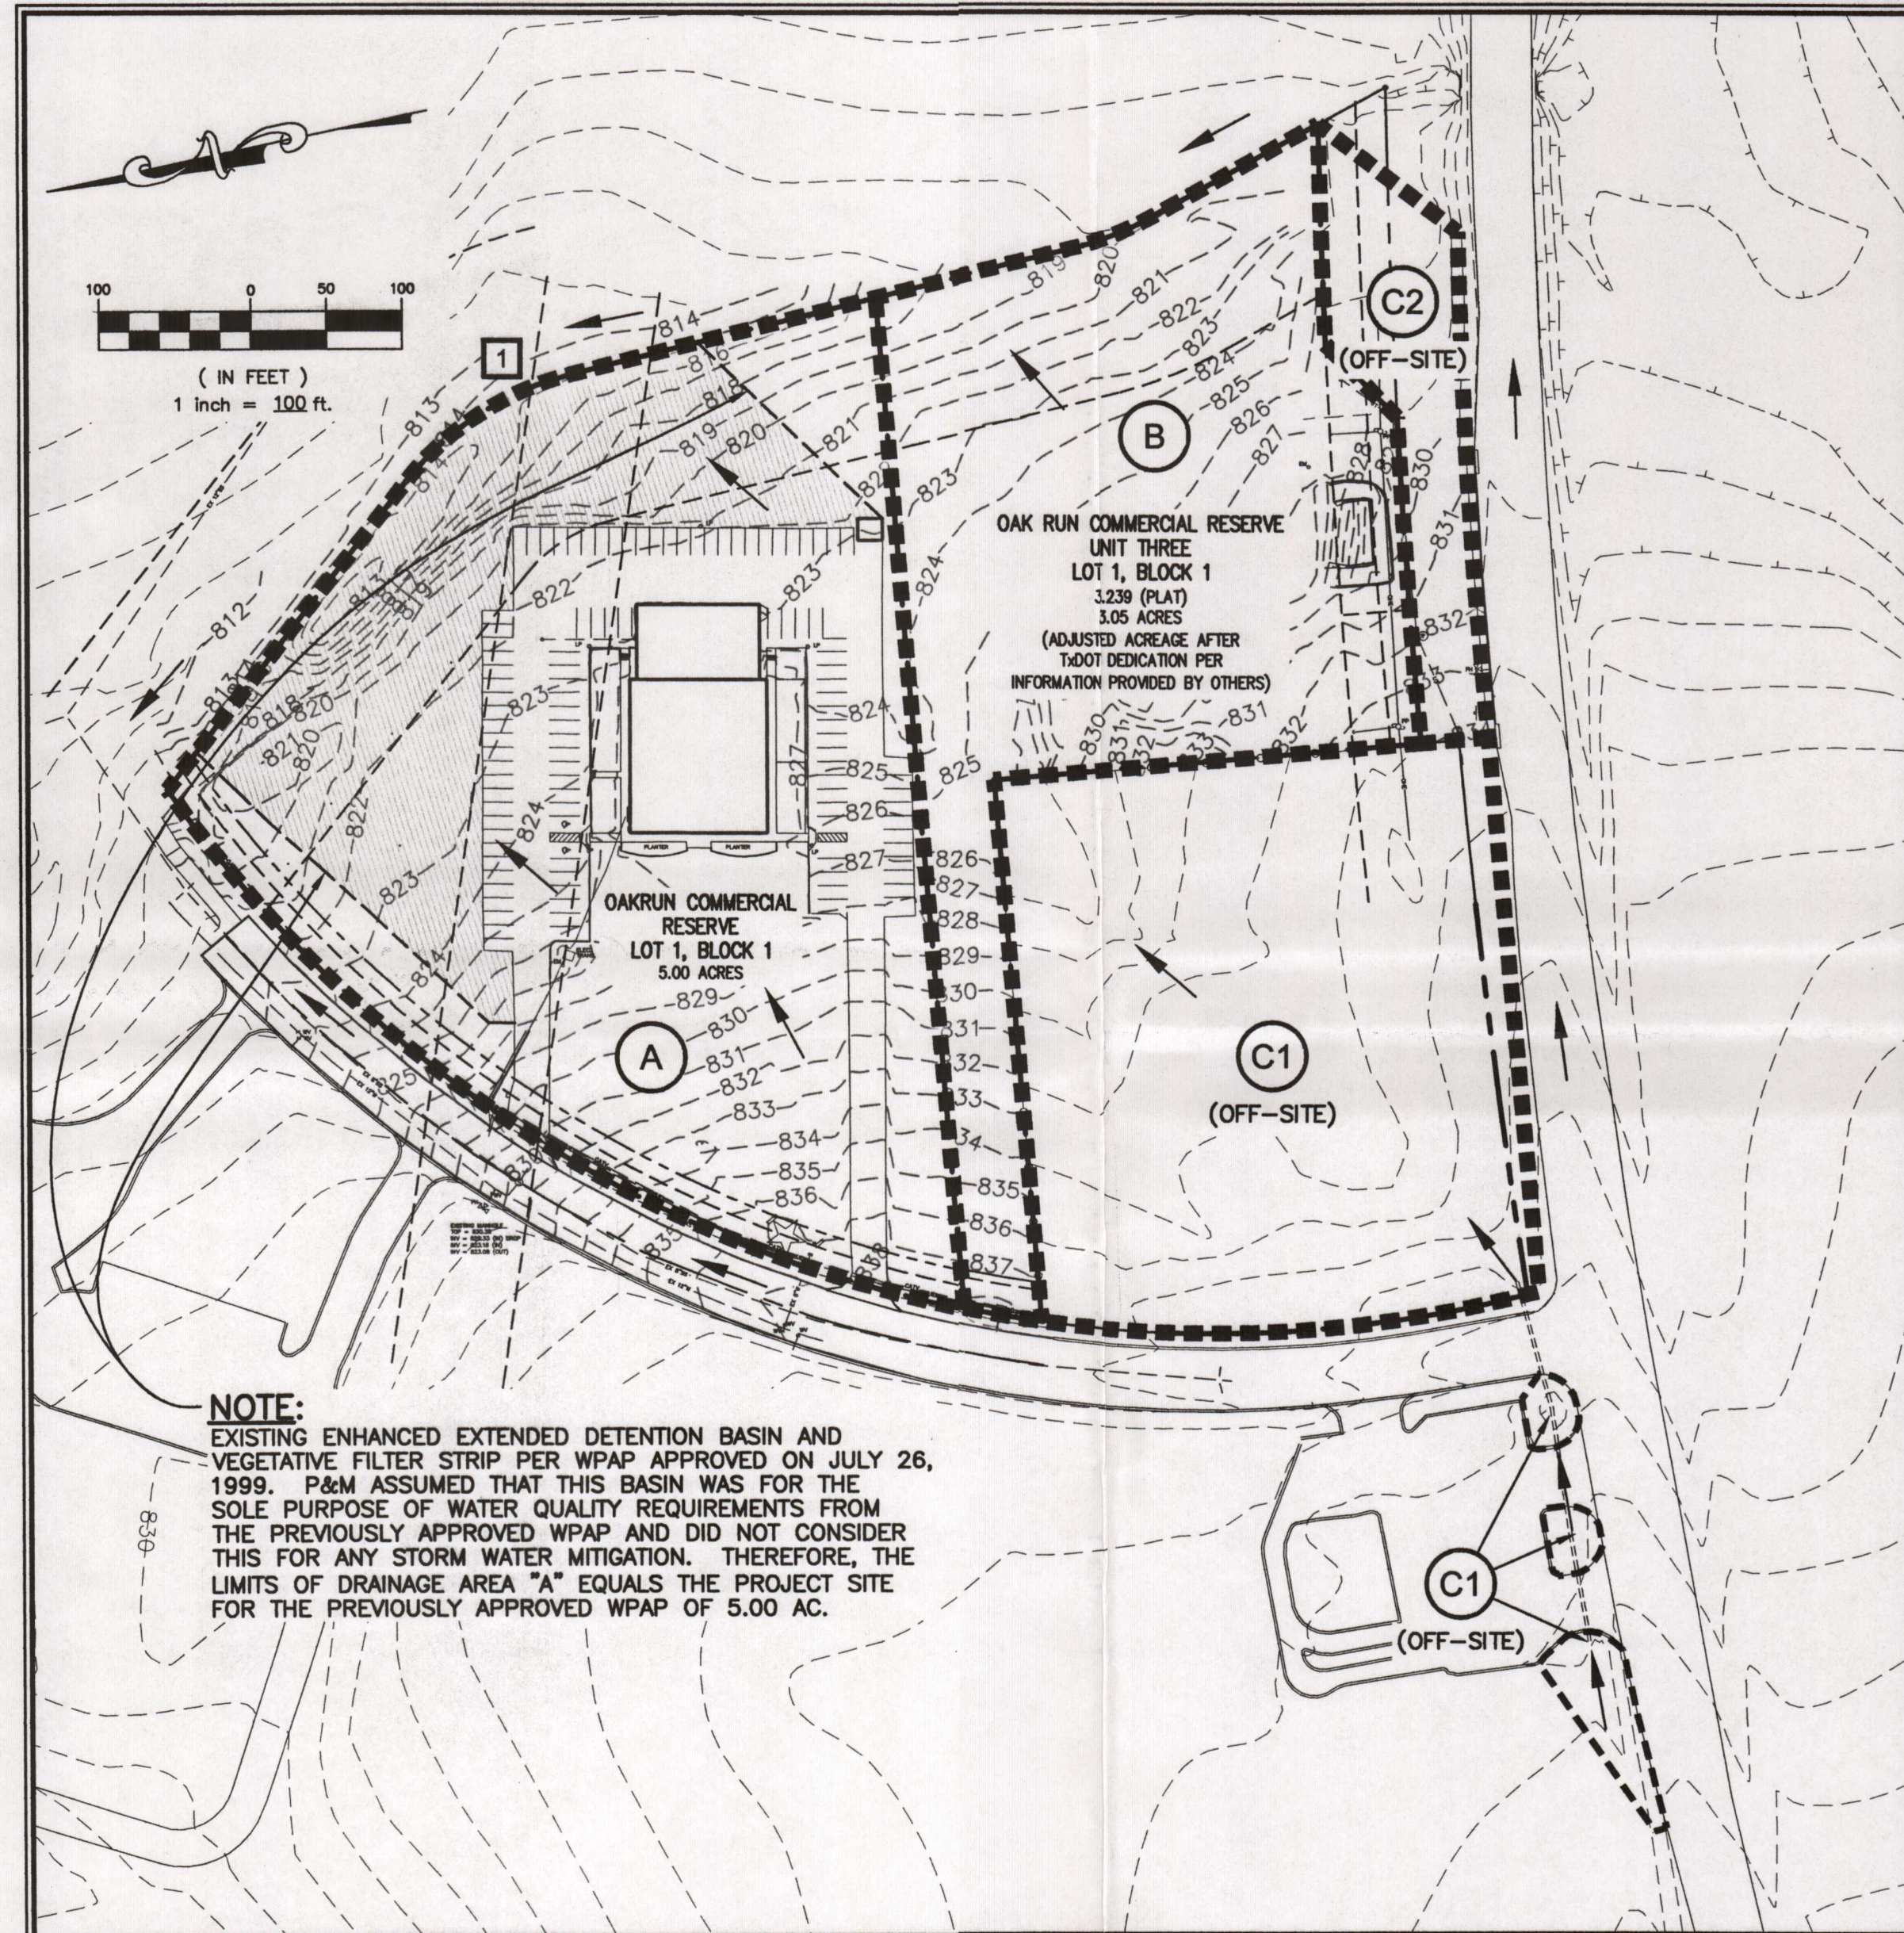

EXISTING DRAINAGE CONDITIONS

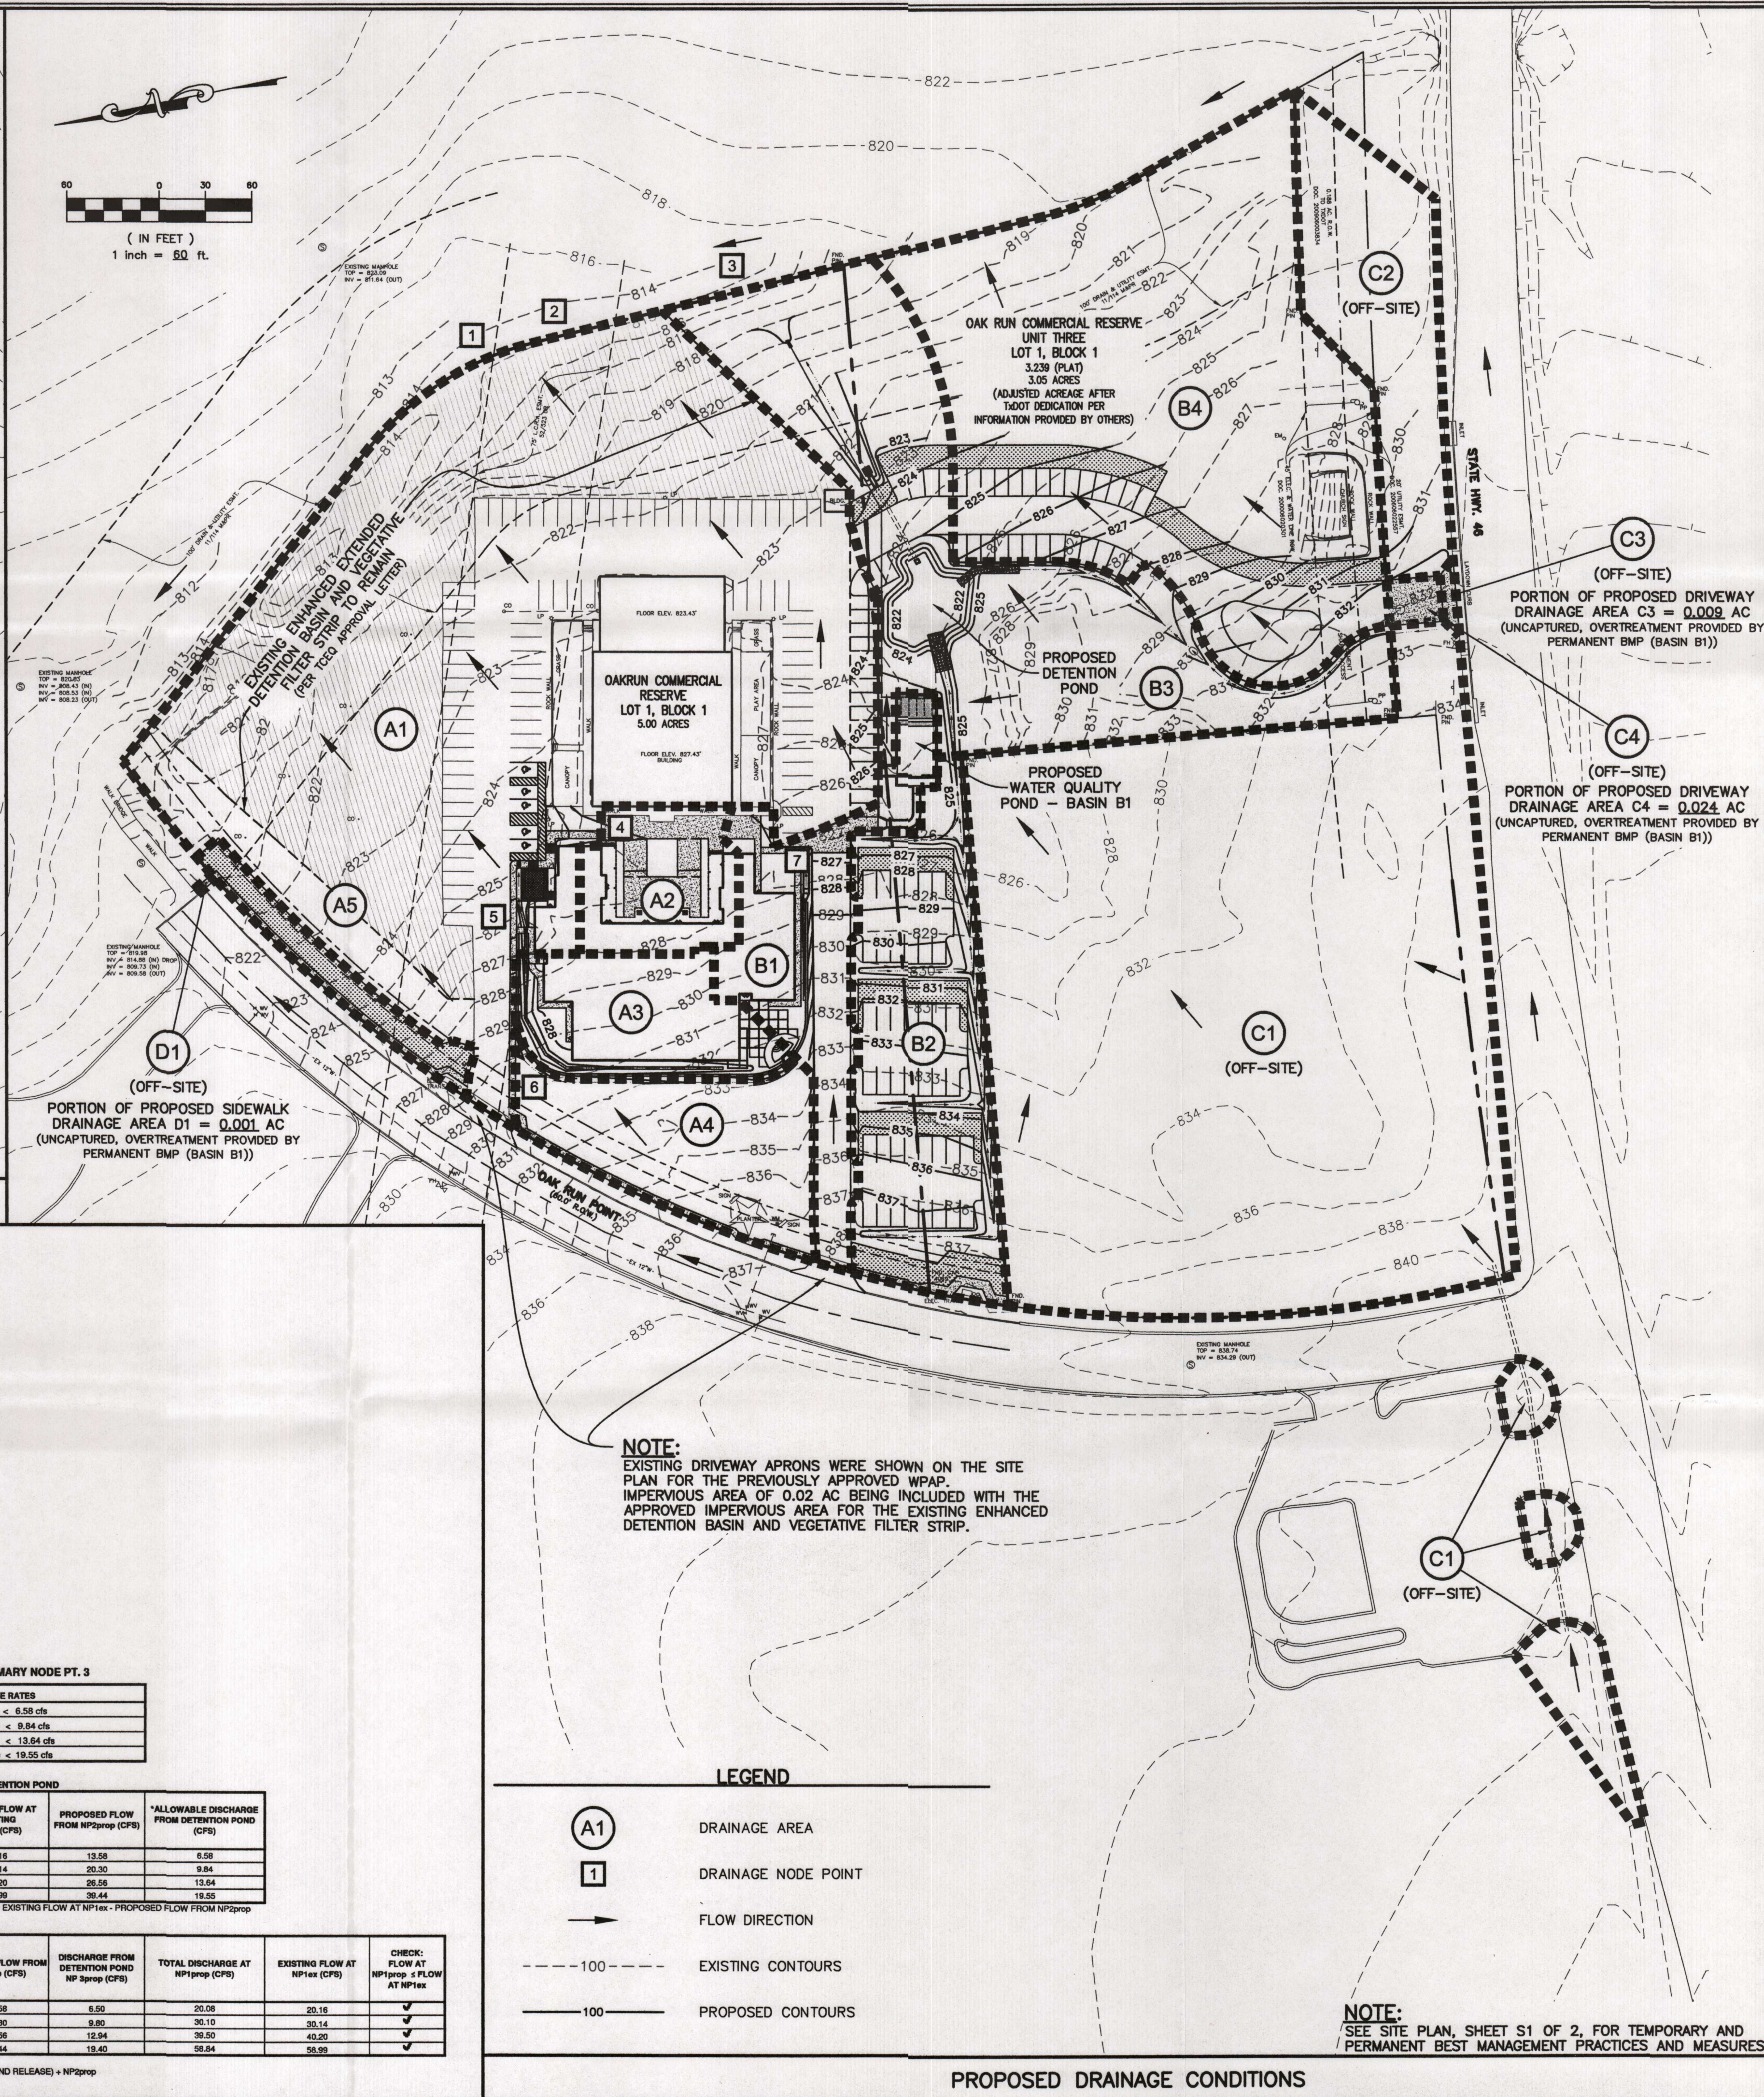

PROPOSED DRAINAGE CONDITIONS

SUMMARY OF HYDROLOGIC CALCULATIONS  
Freedom Fellowship Church Expansion

EXISTING DRAINAGE AREA DESIGNATION	DRAINAGE AREA (acres)	PROPOSED DRAINAGE AREA DESIGNATION	DRAINAGE AREA (acres)
A	5.00	A1	3.21
B	3.05	A2	0.21
C1	3.00	A3	0.28
C2	0.52	A4	0.37
		A5	0.11
		B1	0.41
		B2	0.83
		B3	1.11
		B4	1.72
		C1	3.06
		C2	0.43
		C3	0.01
		C4	0.02
		D1	0.01

*Values Applied to C <sub>10</sub> to Determine C <sub>25</sub> & C <sub>100</sub>	
K <sub>10</sub>	1.00
K <sub>25</sub>	1.10
K <sub>100</sub>	1.25

RATIONAL METHOD (Q<sub>10</sub>KCIA) - EXISTING CONDITIONS

DRAINAGE NODE POINT	CONTRIBUTING DA's	DRAINAGE AREA (acres)	C <sub>1</sub>	C <sub>10</sub>	*C <sub>10</sub>	*C <sub>100</sub>	T <sub>c</sub> (min)	I <sub>a</sub> (in/hr)	I <sub>p</sub> (in/hr)	I <sub>10</sub> (in/hr)	I <sub>100</sub> (in/hr)	Q <sub>1</sub> (cfs)	Q <sub>10</sub> (cfs)	Q <sub>100</sub> (cfs)
1ex	A+B+C1+C2	11.57	0.44	0.44	0.49	0.55	17	3.96	5.92	7.09	9.27	20.16	30.14	40.20

RATIONAL METHOD (Q<sub>10</sub>KCIA) - PROPOSED CONDITIONS

DRAINAGE NODE POINT	CONTRIBUTING DA's	DRAINAGE AREA (acres)	C <sub>1</sub>	C <sub>10</sub>	*C <sub>10</sub>	*C <sub>100</sub>	T <sub>c</sub> (min)	I <sub>a</sub> (in/hr)	I <sub>p</sub> (in/hr)	I <sub>10</sub> (in/hr)	I <sub>100</sub> (in/hr)	Q <sub>1</sub> (cfs)	Q <sub>10</sub> (cfs)	Q <sub>100</sub> (cfs)
1prop (not routed thru pond)	A1-A5+B4+C2+C4	6.35	0.54	0.54	0.59	0.67	17	3.96	5.92	7.09	9.27	13.58	20.30	26.58
2prop (Pond Input)	B1-B3+C1	5.21	0.44	0.44	0.48	0.55	17	3.96	5.92	7.09	9.27	13.58	20.30	26.58
3prop (Pond Release)	-	-	-	-	-	-	-	-	-	-	-	6.50	9.84	13.54
4prop	NP2prop-Pond Rel.	-	-	-	-	-	-	-	-	-	-	20.08	30.10	39.50
5prop	A2	0.21	0.79	0.79	0.87	0.98	10	4.96	7.57	10.7	11.90	0.82	1.26	1.66
6prop	A3	0.28	0.79	0.79	0.87	0.98	10	4.96	7.57	10.7	11.90	1.01	1.25	2.08
7prop	A4	0.37	0.40	0.40	0.44	0.51	10	4.96	7.57	10.7	11.90	0.79	1.12	1.48
8prop	B1	0.41	0.79	0.79	0.87	0.98	10	4.96	7.57	10.7	11.90	1.48	2.27	2.97

POND ROUTING SUMMARY NODE PT. 3

POND RELEASE RATES
2 yr = 6.50 cfs < 6.58 cfs
10 yr = 9.80 cfs < 9.84 cfs
25 yr = 12.94 cfs < 13.64 cfs
100 yr = 19.40 cfs < 19.55 cfs

TARGET RELEASE RATES FROM DETENTION POND

STORM EVENT	EXISTING FLOW AT NP1ex (CFS)	PROPOSED FLOW FROM NP2prop (CFS)	*ALLOWABLE DISCHARGE FROM DETENTION POND (CFS)
2 YR	20.16	13.58	6.58
10 YR	30.14	20.30	9.84
25 YR	40.20	26.58	13.54
100 YR	50.20	32.44	19.55

\*ALLOWABLE DISCHARGE FROM POND = EXISTING FLOW AT NP1ex - PROPOSED FLOW FROM NP2prop

PROPOSED SITE DISCHARGE AT NP1

STORM EVENT	PROPOSED FLOW FROM NP2prop (CFS)	DISCHARGE FROM DETENTION POND NP 3prop (CFS)	TOTAL DISCHARGE AT NP1prop (CFS)	EXISTING FLOW AT NP1ex (CFS)	CHECK: FLOW AT NP1prop ≤ FLOW AT NP1ex
2 YR	13.58	6.50	20.08	20.16	✓
10 YR	20.30	9.80	30.10	30.14	✓
25 YR	26.58	12.94	39.52	40.20	✓
100 YR	32.44	19.40	51.84	50.20	✓

NOTE: TOTAL DISCHARGE AT NP1prop = NP2prop RELEASES + NP3prop

- LEGEND**
- A1 DRAINAGE AREA
  - 1 DRAINAGE NODE POINT
  - FLOW DIRECTION
  - - - - - 100 - - - - - EXISTING CONTOURS
  - 100 — PROPOSED CONTOURS

**NOTE:**  
SEE SITE PLAN, SHEET S1 OF 2, FOR TEMPORARY AND PERMANENT BEST MANAGEMENT PRACTICES AND MEASURES.

**PAWELEK & MOY, INC.**  
CIVIL ENGINEERING & CONSULTING SERVICES  
130 W. JAHN STREET  
NEW BRAUNFELS, TX 78130  
TEL: (830) 629-2563  
FIRM No. F-9862

OWNER:  
FREEDOM FELLOWSHIP CHURCH  
410 OAK RUN POINT  
NEW BRAUNFELS, TX 78132  
TCEQ #43  
FEB 22 2012  
SAN ANTONIO

**DRAINAGE AREA MAP FOR**  
FREEDOM FELLOWSHIP CHURCH  
NEW BRAUNFELS, TEXAS

REVISED

DATE	DESCRIPTION

DRAWN BY: D.G. III  
CHECKED BY: J.J.M.  
DATE: FEBRUARY 2012  
JOB NO.: 1111.01

**D1**



RECEIVED  
FEB 29 2012  
COUNTY ENGINEER

**Permanent Stormwater Section**  
for Regulated Activities  
on the Edwards Aquifer Recharge Zone  
and Relating to 30 TAC §213.5(b)(4)(C), (D)(li), (E), and (5), Effective June 1, 1999

REGULATED ENTITY NAME: Freedom Fellowship Church

**Permanent best management practices (BMPs) and measures that will be used during and after construction is completed.**

1. ☒ Permanent BMPs and measures must be implemented to control the discharge of pollution from regulated activities after the completion of construction.
2. ☒ These practices and measures have been designed, and will be constructed, operated, and maintained to insure that 80% of the incremental increase in the annual mass loading of total suspended solids (TSS) from the site caused by the regulated activity is removed. These quantities have been calculated in accordance with technical guidance prepared or accepted by the executive director.  
☒ The TCEQ Technical Guidance Manual (TGM) was used to design permanent BMPs and measures for this site.  
☐ A technical guidance other than the TCEQ TGM was used to design permanent BMPs and measures for this site. The complete citation for the technical guidance that was used is provided below  

---

---

---
3. ☒ Owners must insure that permanent BMPs and measures are constructed and function as designed. A Texas Licensed Professional Engineer must certify in writing that the permanent BMPs or measures were constructed as designed. The certification letter must be submitted to the appropriate regional office within 30 days of site completion.
4. ☒ Where a site is used for low density single-family residential development and has 20 % or less impervious cover, other permanent BMPs are not required. This exemption from permanent BMPs must be recorded in the county deed records, with a notice that if the percent impervious cover increases above 20% or land use changes, the exemption for the whole site as described in the property boundaries required by 30 TAC §213.4(g) (relating to Application Processing and Approval), may no longer apply and the property owner must notify the appropriate regional office of these changes.  
☐ This site will be used for low density single-family residential development and has 20% or less impervious cover.  
☐ This site will be used for low density single-family residential development but has more than 20% impervious cover.  
☒ This site will not be used for low density single-family residential development.
5. ☒ The executive director may waive the requirement for other permanent BMPs for multi-family residential developments, schools, or small business sites where 20% or less impervious cover is used at the site. This exemption from permanent BMPs must be



recorded in the county deed records, with a notice that if the percent impervious cover increases above 20% or land use changes, the exemption for the whole site as described in the property boundaries required by 30 TAC §213.4(g) (relating to Application Processing and Approval), may no longer apply and the property owner must notify the appropriate regional office of these changes.

- ☐ **ATTACHMENT A - 20% or Less Impervious Cover Waiver.** This site will be used for multi-family residential developments, schools, or small business sites and has 20% or less impervious cover. A request to waive the requirements for other permanent BMPs and measures is found at the end of this form.
- ☐ This site will be used for multi-family residential developments, schools, or small business sites but has more than 20% impervious cover.
- ☒ This site will not be used for multi-family residential developments, schools, or small business sites.

6. **ATTACHMENT B - BMPs for Upgradient Stormwater.**

- ☒ A description of the BMPs and measures that will be used to prevent pollution of surface water, groundwater, or stormwater that originates upgradient from the site and flows across the site is identified as **ATTACHMENT B** at the end of this form.
- ☐ If no surface water, groundwater or stormwater originates upgradient from the site and flows across the site, an explanation is provided as **ATTACHMENT B** at the end of this form.
- ☐ If permanent BMPs or measures are not required to prevent pollution of surface water, groundwater, or stormwater that originates upgradient from the site and flows across the site, an explanation is provided as **ATTACHMENT B** at the end of this form .

7. **ATTACHMENT C - BMPs for On-site Stormwater.**

- ☒ A description of the BMPs and measures that will be used to prevent pollution of surface water or groundwater that originates on-site or flows off the site, including pollution caused by contaminated stormwater runoff from the site is identified as **ATTACHMENT C** at the end of this form.
- ☐ If permanent BMPs or measures are not required to prevent pollution of surface water or groundwater that originates on-site or flows off the site, including pollution caused by contaminated stormwater runoff, an explanation is provided as **ATTACHMENT C** at the end of this form.

8. ☒ **ATTACHMENT D - BMPs for Surface Streams.** A description of the BMPs and measures that prevent pollutants from entering surface streams, sensitive features, or the aquifer is provided at the end of this form. Each feature identified in the Geologic Assessment as "sensitive" or "possibly sensitive" has been addressed.

9. ☒ The applicant understands that to the extent practicable, BMPs and measures must maintain flow to naturally occurring sensitive features identified in either the geologic assessment, executive director review, or during excavation, blasting, or construction.

- ☒ The permanent sealing of or diversion of flow from a naturally-occurring "sensitive"



or "possibly sensitive" feature that accepts recharge to the Edwards Aquifer as a permanent pollution abatement measure has not been proposed for any naturally-occurring "sensitive" or "possibly sensitive" features on this site.

— **ATTACHMENT E - Request to Seal Features.** A request to seal a naturally-occurring "sensitive" or "possibly sensitive" feature, that includes a justification as to why no reasonable and practicable alternative exists, is found at the end of this form. A request and justification has been provided for each feature.

10. X **ATTACHMENT F - Construction Plans.** Construction plans and design calculations for the proposed permanent BMPs and measures have been prepared by or under the direct supervision of a Texas Licensed Professional Engineer. All construction plans and design information have been signed, sealed, and dated by the Texas Licensed Professional Engineer. Construction plans for the proposed permanent BMPs and measures are provided at the end of this form. Design Calculations, TCEQ Construction Notes, all man-made or naturally occurring geologic features, all proposed structural measures, and appropriate details must be shown on the construction plans.

11. X **ATTACHMENT G - Inspection, Maintenance, Repair and Retrofit Plan.** A plan for the inspection, maintenance, repair, and, if necessary, retrofit of the permanent BMPs and measures is provided at the end of this form. The plan has been prepared and certified by the engineer designing the permanent BMPs and measures. The plan has been signed by the owner or responsible party. The plan includes procedures for documenting inspections, maintenance, repairs, and, if necessary, retrofits as well as a discussion of record keeping procedures.

12. X The TCEQ Technical Guidance Manual (TGM) was used to design permanent BMPs and measures for this site.  
— Pilot-scale field testing (including water quality monitoring) may be required for BMPs that are not contained in technical guidance recognized by or prepared by the executive director.

— **ATTACHMENT H - Pilot-Scale Field Testing Plan.** A plan for pilot-scale field testing is provided at the end of this form.

13. X **ATTACHMENT I - Measures for Minimizing Surface Stream Contamination.** A description of the measures that will be used to avoid or minimize surface stream contamination and changes in the way in which water enters a stream as a result of the construction and development is provided at the end of this form. The measures address increased stream flashing, the creation of stronger flows and in-stream velocities, and other in-stream effects caused by the regulated activity which increase erosion that results in water quality degradation.

**Responsibility for maintenance of permanent BMPs and measures after construction is complete.**

14. X The applicant is responsible for maintaining the permanent BMPs after construction until such time as the maintenance obligation is either assumed in writing by another entity having ownership or control of the property (such as without limitation, an owner's association, a new property owner or lessee, a district, or municipality) or the ownership



of the property is transferred to the entity. Such entity shall then be responsible for maintenance until another entity assumes such obligations in writing or ownership is transferred.

15. X A copy of the transfer of responsibility must be filed with the executive director at the appropriate regional office within 30 days of the transfer if the site is for use as a multiple single-family residential development, a multi-family residential development, or a non-residential development such as commercial, industrial, institutional, schools, and other sites where regulated activities occur.

To the best of my knowledge, the responses to this form accurately reflect all information requested concerning the proposed regulated activities and methods to protect the Edwards Aquifer. This **PERMANENT STORMWATER SECTION** is hereby submitted for TCEQ review and executive director approval. The application was prepared by:

John J. Moy, Jr.

Print Name of Customer/Agent

  
Signature of Customer/Agent

2/21/12  
Date



## **PERMANENT STORMWATER SECTION**

### **5. Attachment A- 20% or Less Impervious Cover Waiver**

Not Applicable.

### **6. Attachment B- BMP's for Upgradient Stormwater**

Permanent BMP's or measures are not required to prevent pollution of surface water, groundwater, or stormwater that originates upgradient of the site because the upgradient stormwater runoff that enters this will be conveyed via interceptor drains around on-site permanent BMP's and the off-site water is of different land ownership predominantly in an existing state.

### **7. Attachment C- BMP's for On-Site Stormwater**

A proposed BMP for this site is a partial sedimentation and sand filtration pond. With this BMP, the first flush is captured in the pond (Capture Volume) which allows the larger particles to settle out. The outflow from the sedimentation chamber to the sand filter chamber is controlled by a gabion basket. The sand filters the fines and other contaminated stormwater pollutants that are present in the runoff and a network of perforated PVC piping allows the filtered water to be released from the pond. In the event that a hazardous spill would occur, a gate valve will be located outside of the sand filter to close off flow.

Additionally, engineered vegetative filter strips adjacent to the proposed access drive and parking areas are also being proposed for the areas outside of the drainage basin conveying runoff to the sedimentation/filtration pond. With this BMP, the storm water will drain, in a sheet flow manner, from the drives across the 15' wide grass filter. With the contributing drainage area being less than 72 feet and the slope of the engineered vegetated filter strip ranging from 2% to 20% (max.), the 80% removal requirement will be achieved (per TCEQ RG-348).

### **8. Attachment D- BMP's for Surface Streams**

The proposed BMP's for this site include a partial sedimentation and sand filtration pond and engineered vegetative filter strips. The water quality pond system will capture and filter the first flush of stormwater runoff which appears to contain the most pollutants and prevent these pollutants from entering the



surface streams, sensitive features (no sensitive features on this site), or the aquifer. Additionally, once the water quality volume is reached in the sedimentation/filtration pond, the remaining storm water discharges into a detention pond which will also allow for additional solids/pollutants time to settle. This additional time for settlement will aid in the improvement of the overall water quality and further reduce the impact of the pollutants on surface streams, sensitive features (no sensitive features on this site), or the aquifer.

The engineered vegetative filter strips will filter the storm water runoff coming off of the access drives. With this BMP, the storm water will drain, in a sheet flow manner, from the drives across the 15' wide grass filter. With the contributing drainage area being less than 72 feet and the slope of the engineered vegetated filter strip ranging from 2% to 20% (max.), the 80% removal requirement will be achieved (per TCEQ RG-348) and will prevent pollutants from entering surface streams, sensitive features, or the aquifer.

#### **10. Attachment F- Construction Plans**

Construction Plans for the Partial Sedimentation & Filtration Pond, Permanent BMP, are enclosed in this submittal. See Site Plan for the Partial Sedimentation & Filtration Pond and Engineered Vegetative Filter Strip locations.

The design criteria/requirements for the Engineered Vegetative Filter Strips was taken from the TCEQ "Calculation Template 4-20-09" spreadsheet for Vegetative Filter Strips is shown below.

*"There are no calculations required for determining the load or size of vegetative filter strips. The 80% removal is provided when the contributing drainage area does not exceed 72 feet (direction of flow) and the sheet flow leaving the impervious cover is directed across 15 feet of engineered filter strips with a maximum slope of 20% or across 50 feet of natural vegetation with a maximum slope of 10%. There can be a break in grade as long as no slope exceeds 20%."*

#### **11. Attachment G- Inspection, Maintenance, Repair and Retrofit Plan**

The Maintenance Plan and Scheduled Inspection Plan is located at the end of this section.



**12. Attachment H- Pilot-Scale Field Testing Plan**

Not Applicable.

The proposed BMP's for this site were designed according to the TCEQ Technical Guidance Manual.

**13. Attachment I – Measures for Minimizing Surface Stream Contamination**

As mentioned previously, one of the proposed BMP's for this site is a partial sedimentation and sand filtration pond. With this BMP, the first flush is captured in the pond (Capture Volume) which allows the larger particles to settle out. The outflow from the sedimentation chamber to the sand filter chamber is controlled by a gabion basket. The sand filters the fines and other contaminated stormwater pollutants that are present in the runoff and a network of perforated PVC piping allows the filtered water to be released from the pond. In the event that a hazardous spill would occur, a gate valve will be located outside of the sand filter to close off flow. Additionally, once the water quality volume is reached in the sedimentation/filtration pond, the remaining storm water discharges into a detention pond which also allows for additional solids/pollutants time to settle. This additional time for settlement will aid in the improvement of the overall water quality and further reduce the impact of the pollutants on surface streams, sensitive features (no sensitive features on this site), or the aquifer. Located at the outfall of the detention pond is a proposed velocity control measure which utilizes heavy rock riprap to dissipate the higher flow velocities prior to entering the natural low located downstream of the water quality basin and detention pond.



**CONSTRUCTION PLANS  
FOR  
PERMANENT BMP'S**



FREEDOM FELLOWSHIP CHURCH 8.05 ACRE SITE 2.944 ACRES OF IMPERVIOUS COVER									
Existing/Approved Enhanced Extended Detention Basin and Vegetative Filter Strip (Per Previously Approved WPAP)									
Watershed Area	Permanent BMP	Drainage Area (Acres)	Imp. Cover (Acres)						
*A1-A4	Existing Enhanced Extended Detention Basin and Vegetative Filter Strip	4.07	1.902	Note: The total proposed Impervious Cover of 1.902 acres is less than the maximum allowed Impervious Cover of 1.928 acres (per TCEQ Approval dated July 26, 1999).					
Basin B-1 Summary - Partial Sedimentation and Filtration Basin									
Watershed Area	Permanent BMP Partial Sedimentation and Filtration Basin	Drainage Area (Acres)	Imp. Cover (Acres)	Calc. Min. Capture Volume (cf)	Capture Volume Provided (cf)	Calc. Min. Filter Area (sf)	Filter Area Provided (sf)	Target TSS Removal (lb/yr)	TSS Removal Provided (lb/yr)
B1	Basin B1	0.41	0.316	3,481	3,594	290	348	284	323
**Uncaptured Area 'C3' (Portion Offsite Driveway Apron Draining towards State Highway 46)	Overtreatment in Basin B1	0.01	0.009	----	----	----	----	8	0
**Uncaptured Area 'C4' (Portion Offsite Driveway Apron Draining away from State Highway 46)	Overtreatment in Basin B1	0.02	0.024	----	----	----	----	22	0
**Uncaptured Area 'D1' (Offsite Sidewalk)	Overtreatment in Basin B1	0.001	0.001	----	----	----	----	1	0
Sub-Total - Basin B1	----	0.44	0.350	----	----	----	----	315	323
Engineered Vegetative Filter Strips									
Watershed Area	Permanent BMP	Drainage Area (Acres)	Imp. Cover (Acres)	Calc. Min. Capture Volume (cf)	Capture Volume Provided (cf)	Calc. Min. Filter Area (sf)	Filter Area Provided (sf)	Target TSS Removal (lb/yr)	TSS Removal Provided (lb/yr)
A5	Vegetative Filter Strips	0.11	0.020	----	----	----	----	18	18
B2	Vegetative Filter Strips	0.63	0.287	----	----	----	----	258	258
B3	Vegetative Filter Strips	1.11	0.066					59	59
B4	Vegetative Filter Strips	1.72	0.319					286	286
Sub-Total - Vegetative Filter Strips	----	3.57	0.692	----	----	----	----	621	621
Total	----	**8.08	2.944	----	----	----	----	936	944

**Notes:**

- \*1. Includes existing driveway aprons shown on previously approved WPAP (per TCEQ letter dated July 26, 1999)
- \*\*2. Areas 'C3', 'C4' and 'D1' are Off-Site Areas (Proposed Driveway and Sidewalk, respectively) (Uncaptured) but being treated by Overtreatment provide with the Water Quality Basin B1.
- 3. Drainage Areas 'C1' and 'C2' are Off-site/By-pass Areas.



## PARTIAL SEDIMENTATION/FILTRATION BASIN SIZING

### VOLUME IN SEDIMENTATION BASIN ( $V_{sed}$ )

#### MAIN BASIN

LENGTH = 38'

WIDTH = 25'

DEPTH = Varies:  $825.65 - 823.11 = 2.54'$   
 $825.65 - 822.91 = 2.74'$   
Average Depth = 2.64'

#### ACCESS RAMP

LENGTH = 7.67' (to WQ elev.)

WIDTH = 6'

DEPTH = Varies:  $825.65 - 825.65 = 0'$   
 $825.65 - 823.10 = 2.55'$   
Average Depth = 1.28'

$V_{sed} = V_{main\ basin} + V_{access\ ramp}$

$V_{sed} = (38' \times 25' \times 2.64') + (7.67' \times 6' \times 1.28')$

**$V_{sed} = 2,566.91\ cf$**

### VOLUME IN SAND FILTER BASIN ( $V_{sf}$ )

#### SAND FILTER

LENGTH = 15'

WIDTH = 25'

DEPTH =  $825.65 - 822.91 = 2.74'$

$V_{sf} = (15' \times 25' \times 2.74')$

**$V_{sf} = 1,027.50\ cf$**

Asf = 375 sf  
375 sf > 348 sf  
Note: 348 sf  
Includes 20%  
Increase

THEREFORE, WATER QUALITY VOLUME (WQV) PROVIDED =  $V_{sed} + V_{sf}$

**WQV = 3,594.41 cf (design) > 3,481 cf (required) O.K.**



Additional information is provided for cells with a red triangle in the upper right corner. Place the cursor over the cell.

Text shown in blue indicate location of instructions in the Technical Guidance Manual - RG-348.

Characters shown in red are data entry fields.

Characters shown in black (Bold) are calculated fields. Changes to these fields will remove the equations used in the spreadsheet.

**1. The Required Load Reduction for the total project:**

Calculations from RG-348

Pages 3-27 to 3-30

Page 3-29 Equation 3.3:  $L_M = 27.2(A_N \times P)$

where:

$L_M$  TOTAL PROJECT = Required TSS removal resulting from the proposed development = 80% of increased load

$A_N$  = Net increase in impervious area for the project

$P$  = Average annual precipitation, inches

Site Data: Determine Required Load Removal Based on the Entire Project

County =	Comal	
Total project area included in plan * =	8.05	acres
Impervious Cover allowed to drain to Existing BMP per Original Approved WPAP *	1.902	acres
Total post-development impervious area within the limits of the plan* =	2.944	acres
Total post-development impervious cover fraction * =	0.37	
P =	33	inches

1.902 ac. < Maximum 1.928 ac. per TCEQ Approval Letter Dated July 26, 1999, Existing BMP is an On-Line Enhanced Extended Detention Basin and Vegetated Filter Strip. Basin A1-A4

$L_M$  TOTAL PROJECT = 936 lbs.

\* The values entered in these fields should be for the total project area.

Number of drainage basins / outfalls areas leaving the plan area = 9



Additional information is provided for cells with a red triangle in the upper right corner. Place the cursor over the cell.  
Text shown in blue indicate location of instructions in the Technical Guidance Manual - RG-348

Characters shown in red are data entry fields.

Characters shown in black (Bold) are calculated fields. Changes to these fields will remove the equations used in the spreadsheet.

**1. The Required Load Reduction for the total project:**

Calculations from RG-348

Pages 3-27 to 3-30

Page 3-29 Equation 3.3:  $L_M = 27.2(A_N \times P)$

where

$L_M$  TOTAL PROJECT = Required TSS removal resulting from the proposed development = 80% of increased load

$A_N$  = Net increase in impervious area for the project

$P$  = Average annual precipitation, inches

Site Data: Determine Required Load Removal Based on the Entire Project

County =	Cornal	
Total project area included in plan =	8.05	acres
Impervious Cover allowed to drain to Existing BMP per Original Approved WPAP =	1.902	acres
Total post-development impervious area within the limits of the plan =	2.944	acres
Total post-development impervious cover fraction =	0.37	
$P$ =	33	inches

1.902 ac < Maximum 1.928 ac. per TCEQ Approval Letter  
Dated July 26, 1999, Existing BMP is an On-Line Enhanced  
Extended Detention Basin and Vegetated Filter Strip.

$L_M$  TOTAL PROJECT = 936 lbs.

\* The values entered in these fields should be for the total project area.

Number of drainage basins / outfalls areas leaving the plan area = 9

**2. Drainage Basin Parameters (This information should be provided for each basin):**

Drainage Basin/Outfall Area No. =	2	
Total drainage basin/outfall area =	0.410	acres
Predevelopment impervious area within drainage basin/outfall area =	0.000	acres
Post-development impervious area within drainage basin/outfall area =	0.316	acres
Post-development impervious fraction within drainage basin/outfall area =	0.77	
$L_M$ THIS BASIN =	284	lbs.

Basin B1

**3. Indicate the proposed BMP Code for this basin.**

Proposed BMP = Sand Filter  
Removal efficiency = 89 percent

Aquatic Cartridge Filter  
Bioretention  
Contech StormFilter  
Constructed Wetland  
Extended Detention  
Grassy Swale  
Retention / Irrigation  
Sand Filter  
Stormceptor  
Vegetated Filter Strips  
Vortechs  
Wet Basin  
Wet Vault

**4. Calculate Maximum TSS Load Removed ( $L_R$ ) for this Drainage Basin by the selected BMP Type.**

RG-348 Page 3-33 Equation 3.7  $L_R = (\text{BMP efficiency}) \times P \times (A_i \times 34.6 + A_p \times 0.54)$

where

$A_C$  = Total On-Site drainage area in the BMP catchment area

$A_i$  = Impervious area proposed in the BMP catchment area

$A_p$  = Pervious area remaining in the BMP catchment area

$L_R$  = TSS Load removed from this catchment area by the proposed BMP

$A_C$  = 0.410 acres

$A_i$  = 0.316 acres

$A_p$  = 0.09 acres

$L_R$  = 323 lbs

**5. Calculate Fraction of Annual Runoff to Treat the drainage basin / outfall area**

Desired  $L_M$  THIS BASIN = 315 lbs.

$F$  = 0.98

**6. Calculate Capture Volume required by the BMP Type for this drainage basin / outfall area.**

Calculations from RG-348

Pages 3-34 to 3-36

Rainfall Depth = 3.33 inches



Post Development Runoff Coefficient = 0.59  
On-site Water Quality Volume = 2900 cubic feet

Calculations from RG-348 Pages 3-36 to 3-37

Off-site area draining to BMP = 0.00 acres  
Off-site impervious cover draining to BMP = 0.00 acres  
Impervious fraction of off-site area = 0  
Off-site Runoff Coefficient = 0.00  
Off-site Water Quality Volume = 0 cubic feet

Storage for Sediment = 580  
Total Capture Volume (required water quality volume(s) x 1.20) = 3481 cubic feet

The following sections are used to calculate the required water quality volume(s) for the selected BMP.  
The values for BMP Types not selected in cell C45 will show NA.

**7. Retention/Irrigation System**

Designed as Required in RG-348

Pages 3-42 to 3-46

Required Water Quality Volume for retention basin = NA cubic feet

Irrigation Area Calculations:

Soil infiltration/permeability rate = 0.1 in/hr Enter determined permeability rate or assumed value of 0.1  
Irrigation area = NA square feet  
NA acres

**8. Extended Detention Basin System**

Designed as Required in RG-348

Pages 3-46 to 3-51

Required Water Quality Volume for extended detention basin = NA cubic feet

**9. Filter area for Sand Filters**

Designed as Required in RG-348

Pages 3-58 to 3-63

NOT  
USED

**9A. Full Sedimentation and Filtration System**

Water Quality Volume for sedimentation basin = 3481 cubic feet  
Minimum filter basin area = 161 square feet  
Maximum sedimentation basin area = 1450 square feet For minimum water depth of 2 feet  
Minimum sedimentation basin area = 363 square feet For maximum water depth of 8 feet

USED

**9B. Partial Sedimentation and Filtration System**

Water Quality Volume for combined basins = 3481 cubic feet 3,594 cf (PROVIDED)  
Minimum filter basin area = 290 square feet X 1.20 = 348 sf (375 sf PROVIDED)  
Maximum sedimentation basin area = 1160 square feet For minimum water depth of 2 feet  
Minimum sedimentation basin area = 73 square feet For maximum water depth of 8 feet



Texas Commission on Environmental Quality

TSS Removal Calculations 04-20-2009

Project Name: Freedom Fellowship Church  
Date Prepared: 2/19/2012

Additional information is provided for cells with a red triangle in the upper right corner. Place the cursor over the cell.  
Text shown in blue indicate location of instructions in the Technical Guidance Manual - RG-348.  
Characters shown in red are data entry fields.  
Characters shown in black (Bold) are calculated fields. Changes to these fields will remove the equations used in the spreadsheet.

1. The Required Load Reduction for the total project:

Calculations from RG-348

Pages 3-27 to 3-30

Page 3-29 Equation 3.3:  $L_M = 27.2(A_N \times P)$

where:

$L_{M \text{ TOTAL PROJECT}}$  = Required TSS removal resulting from the proposed development = 80% of increased load  
 $A_N$  = Net increase in impervious area for the project  
 $P$  = Average annual precipitation, inches

Site Data: Determine Required Load Removal Based on the Entire Project

County = Comal  
Total project area included in plan = 8.05 acres  
Impervious Cover allowed to drain to Existing BMP per Original Approved WPAP = 1.902 acres  
Total post-development impervious area within the limits of the plan = 2.944 acres  
Total post-development impervious cover fraction = 0.37  
 $P$  = 33 inches

1.902 ac. < Maximum 1.928 ac. per TCEQ Approval Letter  
Dated July 26, 1999, Existing BMP is an On-Line Enhanced  
Extended Detention Basin and Vegetated Filter Strip.

$L_{M \text{ TOTAL PROJECT}}$  = 936 lbs.

\* The values entered in these fields should be for the total project area.

Number of drainage basins / outfalls areas leaving the plan area = 9

2. Drainage Basin Parameters (This information should be provided for each basin):

Drainage Basin/Outfall Area No. = 3 Basin C3  
Total drainage basin/outfall area = 0.010 acres  
Predevelopment impervious area within drainage basin/outfall area = 0.000 acres  
Post-development impervious area within drainage basin/outfall area = 0.009 acres  
Post-development impervious fraction within drainage basin/outfall area = 0.90  
 $L_{M \text{ THIS BASIN}}$  = 8 lbs.

3. Indicate the proposed BMP Code for this basin.

Proposed BMP = Sand Filter  
Removal efficiency = 89 percent

Aquatic Cartridge Filter  
Bioretention  
Contech StormFilter  
Constructed Wetland  
Extended Detention  
Grassy Swale  
Retention / Irrigation  
Sand Filter  
Stormceptor  
Vegetated Filter Strips  
Vortechs  
Wet Basin  
Wet Vault



Texas Commission on Environmental Quality

TSS Removal Calculations 04-20-2009

Project Name: Freedom Fellowship Church  
Date Prepared: 2/19/2012

Additional information is provided for cells with a red triangle in the upper right corner. Place the cursor over the cell.  
Text shown in blue indicate location of instructions in the Technical Guidance Manual - RG-348.  
Characters shown in red are data entry fields.  
Characters shown in black (Bold) are calculated fields. Changes to these fields will remove the equations used in the spreadsheet.

1. The Required Load Reduction for the total project:

Calculations from RG-348

Pages 3-27 to 3-30

Page 3-29 Equation 3.3:  $L_M = 27.2(A_N \times P)$

where:

$L_{M \text{ TOTAL PROJECT}}$  = Required TSS removal resulting from the proposed development = 80% of increased load

$A_N$  = Net increase in impervious area for the project

$P$  = Average annual precipitation, inches

Site Data: Determine Required Load Removal Based on the Entire Project

County =	Comal	
Total project area included in plan =	8.05	acres
Impervious Cover allowed to drain to Existing BMP per Original Approved WPA =	1.902	acres
Total post-development impervious area within the limits of the plan =	2.944	acres
Total post-development impervious cover fraction =	0.37	
$P$ =	33	inches

1.902 ac < Maximum 1.928 ac per TCEQ Approval Letter  
Dated July 26, 1999. Existing BMP is an On-Line Enhanced  
Extended Detention Basin and Vegetated Filter Strip.

$L_{M \text{ TOTAL PROJECT}}$  = 936 lbs

\* The values entered in these fields should be for the total project area.

Number of drainage basins / outfalls areas leaving the plan area = 9

2. Drainage Basin Parameters (This information should be provided for each basin):

Drainage Basin/Outfall Area No. =	4	Basin C4
Total drainage basin/outfall area =	0.020	acres
Predevelopment impervious area within drainage basin/outfall area =	0.000	acres
Post-development impervious area within drainage basin/outfall area =	0.024	acres
Post-development impervious fraction within drainage basin/outfall area =	1.20	
$L_{M \text{ THIS BASIN}}$ =	22	lbs.

3. Indicate the proposed BMP Code for this basin.

Proposed BMP = Sand Filter  
Removal efficiency = 89 percent

Aqualogic Cartridge Filter  
Bioretention  
Contech StormFilter  
Constructed Wetland  
Extended Detention  
Grassy Swale  
Retention / Irrigation  
Sand Filter  
Stormceptor  
Vegetated Filter Strips  
Vortechs  
Wet Basin  
Wet Vault



Additional information is provided for cells with a red triangle in the upper right corner. Place the cursor over the cell.

Text shown in blue indicate location of instructions in the Technical Guidance Manual - RG-348.

Characters shown in red are data entry fields.

Characters shown in black (Bold) are calculated fields. Changes to these fields will remove the equations used in the spreadsheet.

1. The Required Load Reduction for the total project:

Calculations from RG-348

Pages 3-27 to 3-30

Page 3-29 Equation 3.3:  $L_M = 27.2(A_N \times P)$

where

$L_{M \text{ TOTAL PROJECT}}$  = Required TSS removal resulting from the proposed development = 80% of increased load

$A_N$  = Net increase in impervious area for the project

P = Average annual precipitation, inches

Site Data: Determine Required Load Removal Based on the Entire Project

County =	Comal	
Total project area included in plan *	8.05	acres
Impervious Cover allowed to drain to Existing BMP per Original Approved WPAP *	1.902	acres
Total post-development impervious area within the limits of the plan *	2.944	acres
Total post-development impervious cover fraction *	0.37	
P =	33	inches

1.902 ac. < Maximum 1.928 ac. per TCEQ Approval Letter Dated July 26, 1999. Existing BMP is an On-Line Enhanced Extended Detention Basin and Vegetated Filter Strip.

$L_{M \text{ TOTAL PROJECT}}$  = 936 lbs.

\* The values entered in these fields should be for the total project area.

Number of drainage basins / outfalls areas leaving the plan area = 9

2. Drainage Basin Parameters (This information should be provided for each basin):

Drainage Basin/Outfall Area No. =	5	Basin D1
Total drainage basin/outfall area =	0.001	acres
Predevelopment impervious area within drainage basin/outfall area =	0.000	acres
Post-development impervious area within drainage basin/outfall area =	0.001	acres
Post-development impervious fraction within drainage basin/outfall area =	1.00	
$L_{M \text{ THIS BASIN}}$ =	1	lbs

3. Indicate the proposed BMP Code for this basin.

Proposed BMP = Sand Filter  
Removal efficiency = 89 percent

Aqualogic Cartridge Filter  
Bioretention  
Contech StormFilter  
Constructed Wetland  
Extended Detention  
Grassy Swale  
Retention / Imigation  
Sand Filter  
Stormceptor  
Vegetated Filter Strips  
Vortechs  
Wet Basin  
Wet Vault



Additional information is provided for cells with a red triangle in the upper right corner. Place the cursor over the cell.

Text shown in blue indicate location of instructions in the Technical Guidance Manual - RG-348.

Characters shown in red are data entry fields.

Characters shown in black (Bold) are calculated fields. Changes to these fields will remove the equations used in the spreadsheet.

#### 1. The Required Load Reduction for the total project:

Calculations from RG-348

Pages 3-27 to 3-30

Page 3-29 Equation 3.3:  $L_M = 27.2(A_N \times P)$

where

$L_M$  TOTAL PROJECT = Required TSS removal resulting from the proposed development = 80% of increased load

$A_N$  = Net increase in impervious area for the project

$P$  = Average annual precipitation, inches

Site Data: Determine Required Load Reduction Based on the Entire Project

County =	Comal	
Total project area included in plan =	8.05	acres
Impervious Cover allowed to drain to Existing BMP per Original Approved WPAP =	1.902	acres
Total post-development impervious area within the limits of the plan =	2.944	acres
Total post-development impervious cover fraction =	0.37	
$P$ =	33	inches

1.902 ac. < Maximum 1 928 ac. per TCEQ Approval Letter  
Dated July 26, 1999. Existing BMP is an On-Line Enhanced  
Extended Detention Basin and Vegetated Filter Strip

$L_M$  TOTAL PROJECT = 936 lbs.

\* The values entered in these fields should be for the total project area.

Number of drainage basins / outfalls areas leaving the plan area = 9

#### 2. Drainage Basin Parameters (This information should be provided for each basin):

Drainage Basin/Outfall Area No. =	6	Basin A5
Total drainage basin/outfall area =	0.110	acres
Predevelopment impervious area within drainage basin/outfall area =	0.000	acres
Post-development impervious area within drainage basin/outfall area =	0.020	acres
Post-development impervious fraction within drainage basin/outfall area =	0.18	
$L_M$ THIS BASIN =	18	lbs.

#### 3. Indicate the proposed BMP Code for this basin.

Proposed BMP = Vegetated Filter Strips  
Removal efficiency = 85 percent

Aqualogic Cartridge Filter  
Bioretention  
Contech StormFilter  
Constructed Wetland  
Extended Detention  
Grassy Swale  
Retention / Irrigation  
Sand Filter  
Stormceptor  
Vegetated Filter Strips  
Vortechs  
Wet Basin  
Wet Vault

#### 4. Calculate Maximum TSS Load Removed ( $L_R$ ) for this Drainage Basin by the selected BMP Type.

RG-348 Page 3-33 Equation 3.7:  $L_R = (\text{BMP efficiency}) \times P \times (A_i \times 34.6 + A_p \times 0.54)$

where:

$A_C$  = Total On-Site drainage area in the BMP catchment area

$A_i$  = Impervious area proposed in the BMP catchment area

$A_p$  = Pervious area remaining in the BMP catchment area

$L_R$  = TSS Load removed from this catchment area by the proposed BMP

$A_C$  = 0.11 acres

$A_i$  = 0.02 acres

$A_p$  = 0.09 acres

$L_R$  = 21 lbs



**5. Calculate Fraction of Annual Runoff to Treat the drainage basin / outfall area**

Desired  $L_M$  THIS BASIN = 18 lbs.

F = 0.87

**16. Vegetated Filter Strips**

Designed as Required in RG-348

Pages 3-55 to 3-57

There are no calculations required for determining the load or size of vegetative filter strips.

The 80% removal is provided when the contributing drainage area does not exceed 72 feet (direction of flow) and the sheet flow leaving the impervious cover is directed across 15 feet of engineered filter strips with maximum slope of 20% or across 50 feet of natural vegetation with a maximum slope of 10%. There can be a break in grade as long as no slope exceeds 20%.

If vegetative filter strips are proposed for an interim permanent BMP, they may be sized as described on Page 3-56 of RG-348.



Additional information is provided for cells with a red triangle in the upper right corner. Place the cursor over the cell.

Text shown in blue indicate location of instructions in the Technical Guidance Manual - RG-348.

Characters shown in red are data entry fields.

Characters shown in black (Bold) are calculated fields. Changes to these fields will remove the equations used in the spreadsheet.

#### 1. The Required Load Reduction for the total project:

Calculations from RG-348

Pages 3-27 to 3-30

Page 3-29 Equation 3.3:  $L_M = 27.2(A_N \times P)$ 

where:

 $L_M$  TOTAL PROJECT = Required TSS removal resulting from the proposed development = 80% of increased load $A_N$  = Net increase in impervious area for the project $P$  = Average annual precipitation, inches

Site Data: Determine Required Load Reduction Based on the Entire Project

County =	Comal	
Total project area included in plan =	8.05	acres
Impervious Cover allowed to drain to Existing BMP per Original Approved WPAP =	1.902	acres
Total post-development impervious area within the limits of the plan =	2.944	acres
Total post-development impervious cover fraction =	0.37	
$P$ =	33	inches

1 902 ac < Maximum 1.928 ac per TCEQ Approval Letter  
Dated July 26, 1999. Existing BMP is an On-Line Enhanced  
Extended Detention Basin and Vegetated Filter Strip

 $L_M$  TOTAL PROJECT = 936 lbs

\* The values entered in these fields should be for the total project area.

Number of drainage basins / outfalls areas leaving the plan area = 9

#### 2. Drainage Basin Parameters (This information should be provided for each basin):

Drainage Basin/Outfall Area No. =	7	Basin B2
Total drainage basin/outfall area =	0.630	acres
Predevelopment impervious area within drainage basin/outfall area =	0.000	acres
Post-development impervious area within drainage basin/outfall area =	0.287	acres
Post-development impervious fraction within drainage basin/outfall area =	0.46	
$L_M$ THIS BASIN =	258	lbs.

#### 3. Indicate the proposed BMP Code for this basin.

Proposed BMP = Vegetated Filter Strips  
Removal efficiency = 85 percent

Aqualogic Cartridge Filter  
Bioretention  
Contech StormFilter  
Constructed Wetland  
Extended Detention  
Grassy Swale  
Retention / Imigation  
Sand Filter  
Stormceptor  
Vegetated Filter Strips  
Vortechs  
Wet Basin  
Wet Vault

#### 4. Calculate Maximum TSS Load Removed ( $L_R$ ) for this Drainage Basin by the selected BMP Type.

RG-348 Page 3-33 Equation 3.7  $L_R = (\text{BMP efficiency}) \times P \times (A_i \times 34.8 + A_p \times 0.54)$ 

where:

 $A_C$  = Total On-Site drainage area in the BMP catchment area $A_i$  = Impervious area proposed in the BMP catchment area $A_p$  = Pervious area remaining in the BMP catchment area $L_R$  = TSS Load removed from this catchment area by the proposed BMP $A_C$  = 0.63 acres $A_i$  = 0.29 acres $A_p$  = 0.34 acres $L_R$  = 284 lbs



5. Calculate Fraction of Annual Runoff to Treat the drainage basin / outfall area

Desired  $L_{M \text{ THIS BASIN}}$  = 258 lbs.

F = 0.91

18. Vegetated Filter Strips

Designed as Required in RG-348

Pages 3-55 to 3-57

There are no calculations required for determining the load or size of vegetative filter strips.

The 80% removal is provided when the contributing drainage area does not exceed 72 feet (direction of flow) and the sheet flow leaving the impervious cover is directed across 15 feet of engineered filter strips with maximum slope of 20% or across 50 feet of natural vegetation with a maximum slope of 10%. There can be a break in grade as long as no slope exceeds 20%.

If vegetative filter strips are proposed for an interim permanent BMP, they may be sized as described on Page 3-56 of RG-348.



Texas Commission on Environmental Quality

TSS Removal Calculations 04-20-2009

Project Name: Freedom Fellowship Church  
Date Prepared: 2/19/2012

Additional information is provided for cells with a red triangle in the upper right corner. Place the cursor over the cell.  
Text shown in blue indicate location of instructions in the Technical Guidance Manual - RG-348.  
Characters shown in red are data entry fields.  
Characters shown in black (Bold) are calculated fields. Changes to these fields will remove the equations used in the spreadsheet.

1. The Required Load Reduction for the total project:

Calculations from RG-348

Pages 3-27 to 3-30

Page 3-29 Equation 3.3:  $L_M = 27.2(A_N \times P)$

where:

$L_M$  TOTAL PROJECT = Required TSS removal resulting from the proposed development = 80% of increased load

$A_N$  = Net increase in impervious area for the project

$P$  = Average annual precipitation, inches

Site Data: Determine Required Load Removal Based on the Entire Project

County =	Comal	
Total project area included in plan *	8.05	acres
Impervious Cover allowed to drain to Existing BMP per Original Approved WPAP *	1.902	acres
Total post-development impervious area within the limits of the plan *	2.944	acres
Total post-development impervious cover fraction *	0.37	
P =	33	inches

1.902 ac. < Maximum 1 928 ac. per TCEQ Approval Letter  
Dated July 26, 1999, Existing BMP is an On-Line Enhanced  
Extended Detention Basin and Vegetated Filter Strip.

$L_M$  TOTAL PROJECT = 936 lbs

\* The values entered in these fields should be for the total project area.

Number of drainage basins / outfalls areas leaving the plan area = 9

2. Drainage Basin Parameters (This information should be provided for each basin):

Drainage Basin/Outfall Area No. =	8	Basin 93
Total drainage basin/outfall area =	1.110	acres
Predevelopment impervious area within drainage basin/outfall area =	0.000	acres
Post-development impervious area within drainage basin/outfall area =	0.066	acres
Post-development impervious fraction within drainage basin/outfall area =	0.06	
$L_M$ THIS BASIN =	59	lbs.

3. Indicate the proposed BMP Code for this basin.

Proposed BMP = Vegetated Filter Strips  
Removal efficiency = 85 percent

Aqualogic Cartridge Filter  
Bioretention  
Contech StormFilter  
Constructed Wetland  
Extended Detention  
Grassy Swale  
Retention / Irrigation  
Sand Filter  
Stormceptor  
Vegetated Filter Strips  
Vortechs  
Wet Basin  
Wet Vault

4. Calculate Maximum TSS Load Removed ( $L_R$ ) for this Drainage Basin by the selected BMP Type.

RG-348 Page 3-33 Equation 3.7:  $L_R = (\text{BMP efficiency}) \times P \times (A_i \times 34.6 + A_p \times 0.54)$

where:

$A_C$  = Total On-Site drainage area in the BMP catchment area

$A_i$  = Impervious area proposed in the BMP catchment area

$A_p$  = Pervious area remaining in the BMP catchment area

$L_R$  = TSS Load removed from this catchment area by the proposed BMP

$A_C$  = 1.11 acres

$A_i$  = 0.07 acres

$A_p$  = 1.04 acres

$L_R$  = 80 lbs



**5. Calculate Fraction of Annual Runoff to Treat the drainage basin / outfall area**

Desired  $L_{M \text{ THIS BASIN}}$  = 59 lbs.

F = 0.74

**16. Vegetated Filter Strips**

Designed as Required in RG-348

Pages 3-55 to 3-57

There are no calculations required for determining the load or size of vegetative filter strips.

The 80% removal is provided when the contributing drainage area does not exceed 72 feet (direction of flow) and the sheet flow leaving the impervious cover is directed across 15 feet of engineered filter strips with maximum slope of 20% or across 50 feet of natural vegetation with a maximum slope of 10%. There can be a break in grade as long as no slope exceeds 20%.

If vegetative filter strips are proposed for an interim permanent BMP, they may be sized as described on Page 3-56 of RG-348.



Texas Commission on Environmental Quality

TSS Removal Calculations 04-20-2009

Project Name: Freedom Fellowship Church  
Date Prepared: 2/19/2012

Additional information is provided for cells with a red triangle in the upper right corner. Place the cursor over the cell.  
Text shown in blue indicate location of instructions in the Technical Guidance Manual - RG-348.  
Characters shown in red are data entry fields.  
Characters shown in black (Bold) are calculated fields. Changes to these fields will remove the equations used in the spreadsheet.

1. The Required Load Reduction for the total project:

Calculations from RG-348

Pages 3-27 to 3-30

Page 3-29 Equation 3-3:  $L_M = 27.2(A_N \times P)$

where:

$L_{M \text{ TOTAL PROJECT}}$  = Required TSS removal resulting from the proposed development = 80% of increased load

$A_N$  = Net increase in impervious area for the project

$P$  = Average annual precipitation, inches

Site Data: Determine Required Load Removal Based on the Entire Project

County =	Comal	
Total project area included in plan *	8.05	acres
Impervious Cover allowed to drain to Existing BMP per Original Approved WPAP *	1.902	acres
Total post-development impervious area within the limits of the plan *	2.944	acres
Total post-development impervious cover fraction *	0.37	
P =	33	inches

1.902 ac. < Maximum 1.928 ac. per TCEQ Approval Letter  
Dated July 26, 1999. Existing BMP is an On-Line Enhanced  
Extended Detention Basin and Vegetated Filter Strip.

$L_{M \text{ TOTAL PROJECT}}$  = 936 lbs

\* The values entered in these fields should be for the total project area.

Number of drainage basins / outfalls areas leaving the plan area = 9

2. Drainage Basin Parameters (This information should be provided for each basin):

Drainage Basin/Outfall Area No. =	9	Basin B4
Total drainage basin/outfall area =	1.720	acres
Predevelopment impervious area within drainage basin/outfall area =	0.000	acres
Post-development impervious area within drainage basin/outfall area =	0.319	acres
Post-development impervious fraction within drainage basin/outfall area =	0.19	
$L_{M \text{ THIS BASIN}}$ =	286	lbs.

3. Indicate the proposed BMP Code for this basin:

Proposed BMP = Vegetated Filter Strips  
Removal efficiency = 85 percent

Aqualogic Cartridge Filter  
Bioretention  
Contech StormFilter  
Constructed Wetland  
Extended Detention  
Grassy Swale  
Retention / Impingement  
Sand Filter  
Stormceptor  
Vegetated Filter Strips  
Vortechs  
Wet Basin  
Wet Vault

4. Calculate Maximum TSS Load Removed ( $L_R$ ) for this Drainage Basin by the selected BMP Type.

RG-348 Page 3-33 Equation 3-7:  $L_R = (\text{BMP efficiency}) \times P \times (A_i \times 34.6 + A_p \times 0.54)$

where:

$A_C$  = Total On-Site drainage area in the BMP catchment area

$A_i$  = Impervious area proposed in the BMP catchment area

$A_p$  = Pervious area remaining in the BMP catchment area

$L_R$  = TSS Load removed from this catchment area by the proposed BMP

$A_C$  = 1.72 acres

$A_i$  = 0.32 acres

$A_p$  = 1.40 acres

$L_R$  = 331 lbs



**5. Calculate Fraction of Annual Runoff to Treat the drainage basin / outfall area**

Desired  $L_{M \text{ THIS BASIN}}$  = 286 lbs.

F = 0.86

**16. Vegetated Filter Strips**

Designed as Required in RG-348

Pages 3-55 to 3-57

There are no calculations required for determining the load or size of vegetative filter strips. The 80% removal is provided when the contributing drainage area does not exceed 72 feet (direction of flow) and the sheet flow leaving the impervious cover is directed across 15 feet of engineered filter strips with maximum slope of 20% or across 50 feet of natural vegetation with a maximum slope of 10%. There can be a break in grade as long as no slope exceeds 20%.

If vegetative filter strips are proposed for an interim permanent BMP, they may be sized as described on Page 3-56 of RG-348.







**Attachment "G"**  
**Maintenance Plan and Schedule for Sedimentation and Filtration Basin**

PROJECT NAME: Freedom Fellowship Church

ADDRESS: 410 Oak Run Point

CITY, STATE, ZIP: New Braunfels, Texas 78132

**SEDIMENTATION BASIN**

**Twice a Year:** The level of accumulated silt in the inlet structure and basin shall be checked. If depth of silt exceeds 6 inches or when function is impaired, it shall be removed and disposed of "properly". The inlet structure and basin shall be checked for accumulation of debris and trash. The debris and trash shall be removed.

The basin shall be inspected for structural integrity and repaired if necessary. Such items to be inspected include pipes, concrete walls, floors and baffles, gabions, etc.

**Every 5 Years:** Sediment shall be removed from the inlet structure and basin at intervals not to exceed 5 years, regardless of depth.

**After Rainfall:** The basin shall be checked after each rainfall occurrence to insure that it completely drains within 48 hours after the storm is over. If it does not drain within this time, corrective maintenance is required.

**SAND FILTER**

**Twice a Year:** The level of accumulated silt shall be checked. If depth of silt/pollutants exceeds  $\frac{1}{2}$ ", it shall be removed and disposed of "properly".

The accumulation of pollutants/oils shall be checked. If the pollutants have significantly reduced the design capacity of the sand filter and/or the drawdown time exceeds 48 hours, the upper layer of sand in the filter shall be removed and replaced.

The basin shall be checked for accumulation of debris and litter. Debris and litter accumulated in the facility must be removed during each inspection.

The basin shall be inspected for structural integrity and repaired if necessary. Such items to be inspected include pipes and cleanouts, gate valve, etc. Underdrain piping shall be flushed to remove sediment buildup.

**After Rainfall:** The basin shall be checked after each rainfall occurrence to insure that it drains within 48 hours. If it does not drain within this time, corrective maintenance is required.

**Following any required maintenance, the surface of the sand filter shall be raked and leveled to restore the system to its design condition. Maintenance of the water quality basin may require that a section of gabion be temporarily moved to allow access for equipment. Upon completion of maintenance, the gabion shall be reset to its original position.**

**Vegetation around the basin will be maintained to a height of less than 18 inches.**

"Proper" disposal of accumulated silt shall be accomplished following Texas Commission on Environmental Quality guidelines and specifications.

**An amended copy of this document will be provided to the Texas Commission on Environmental Quality within thirty (30) days of any changes in the following information.**

Responsible Party for Maintenance  
Address  
City, State Zip  
Telephone Number

Freedom Fellowship Church – James Gallaher  
410 Oak Run Point  
New Braunfels, Texas 78132  
(830) 625-1288

Signature of Responsible Party

James Gallaher

Print Name of Responsible Party

2/20/12  
Date



**Attachment "G"**  
**Maintenance Plan and Schedule for Vegetative Filter Strip**

**PROJECT NAME:** Freedom Fellowship Church

**ADDRESS:** 410 Oak Run Point

**CITY, STATE, ZIP:** New Braunfels, Texas 78132

**VEGETATIVE FILTER STRIP (per TCEQ: RG-348)**

**Pest Management:** An Integrated Pest Management (IPM) Plan shall be implemented consisting of minimal or no use of herbicides for insect and weed control. Weeds shall be manually removed from the vegetative filter strip where possible and if an abundance of weeds/insects are present, the filter strip shall be sprayed with an environmentally/vegetative safe pesticide/herbicide.

**Seasonal Mowing and Lawn Care:** If the filter strip is made up of turf grass, it should be mowed as needed to limit vegetation height to 18 inches, using a mulching mower (or removal of clippings). If native grasses are used, the filter may require less frequent mowing, but at a minimum of twice annually. Grass clippings and brush debris should not be deposited on the vegetated filter strip areas. Regular mowing shall include weed control practices, with herbicide use kept to a minimum.

**Inspection:** The filter strip shall be inspected at a minimum of twice annually for erosion or damage to vegetation; however, additional inspection after periods of heavy runoff is most desirable. The strip shall be checked for uniformity of grass cover, debris and litter, and areas of sediment accumulation. More frequent inspections of the grass cover during the first few years after establishment will help to determine if any problems are developing, and to plan for long-term restorative maintenance needs. Bare spots and areas of erosion identified during semi-annual inspections must be replanted and restored to meet specifications. Construction of a level spreader device may be necessary to reestablish shallow overland flow.

**Debris and Litter Removal:** All filter strips shall be kept free of obstructions to reduce floatables being flushed downstream, and for aesthetic reasons. The need for this practice is determined through periodic inspection, but shall be performed no less than 4 times per year.

**Sediment Removal:** Sediment removal is not normally required, since the vegetation normally grows through it and binds it to the soil. However, sediment may accumulate along the upstream boundary of the strip preventing uniform overland flow. Excess sediment shall be removed by hand or with flat-bottomed shovels.

**Grass Reseeding and mulching:** A healthy dense grass shall be maintained on the filter strip. If areas are eroded, they shall be filled, compacted and reseeded so that the final grade is level. Grass damaged during the sediment removal process shall be promptly replaced using the same seed mix used during filter strip establishment. If possible, flow should be diverted from the damaged areas until the grass is firmly established. Bare spots and areas identified during semi-annual inspections must be replanted and restored to meet specifications. Corrective maintenance, such as weeding or replanting shall be done more frequently in the first two to three years after installation to ensure stabilization. Dense vegetation may require irrigation immediately after planting, during particularly dry periods and when vegetation is initially established.


"Proper" disposal of accumulated silt shall be accomplished following Texas Commission on Environmental Quality guidelines and specifications.

**An amended copy of this document will be provided to the Texas Commission on Environmental Quality within thirty (30) days of any changes in the following information.**

Responsible Party for Maintenance  
Address  
City, State Zip  
Telephone Number

Freedom Fellowship Church – James Gallaher  
410 Oak Run Point  
New Braunfels, Texas 78132  
(830) 625-1288

Signature of Responsible Party

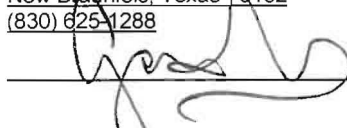

1/20/12  
DATE

Print Name of Responsible Party

James Gallaher



**Agent Authorization Form**  
For Required Signature  
Edwards Aquifer Protection Program  
Relating to 30 TAC Chapter 213  
Effective June 1, 1999

I \_\_\_\_\_ James Gallaher \_\_\_\_\_  
Print Name  
Associate Pastor \_\_\_\_\_  
Title - Owner/President/Other \_\_\_\_\_  
of \_\_\_\_\_ Freedom Fellowship Church \_\_\_\_\_  
Corporation/Partnership/Entity Name  
have authorized \_\_\_\_\_ John J. Moy, Jr. \_\_\_\_\_  
Print Name of Agent/Engineer  
of \_\_\_\_\_ Pawelek & Moy, Inc. \_\_\_\_\_  
Print Name of Firm


to represent and act on the behalf of the above named Corporation, Partnership, or Entity for the purpose of preparing and submitting this plan application to the Texas Commission on Environmental Quality (TCEQ) for the review and approval consideration of regulated activities.

I also understand that:

1. The applicant is responsible for compliance with 30 Texas Administrative Code Chapter 213 and any condition of the TCEQ's approval letter. The TCEQ is authorized to assess administrative penalties of up to \$10,000 per day per violation.
2. For those submitting an application who are not the property owner, but who have the right to control and possess the property, additional authorization is required from the owner.
3. Application fees are due and payable at the time the application is submitted. The application fee must be sent to the TCEQ cashier or to the appropriate regional office. The application will not be considered until the correct fee is received by the commission.
4. A notarized copy of the Agent Authorization Form must be provided for the person preparing the application, and this form must accompany the completed application.
5. No person shall commence any regulated activity on the Edwards Aquifer Recharge Zone, Contributing Zone or Transition Zone until the appropriate application for the activity has been filed with and approved by the Executive Director.



SIGNATURE PAGE:

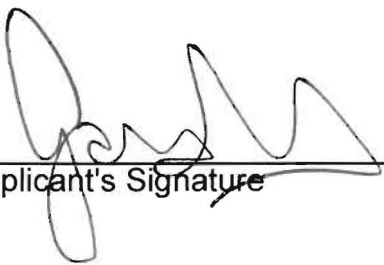  
Applicant's Signature


Date 2/14/12

THE STATE OF Texas §


County of Comal §

BEFORE ME, the undersigned authority, on this day personally appeared James Callahan known to me to be the person whose name is subscribed to the foregoing instrument, and acknowledged to me that (s)he executed same for the purpose and consideration therein expressed.

GIVEN under my hand and seal of office on this 14<sup>th</sup> day of February, 2012

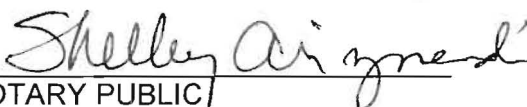  
NOTARY PUBLIC

Shelley Arizmendi  
Typed or Printed Name of Notary



MY COMMISSION EXPIRES: 11-30-13



Texas Commission on Environmental Quality  
Edwards Aquifer Protection Program  
**Application Fee Form**

NAME OF PROPOSED REGULATED ENTITY: Freedom Fellowship Church  
REGULATED ENTITY LOCATION: 410 Oak Run Point, New Braunfels, TX.  
NAME OF CUSTOMER: Freedom Fellowship Church  
CONTACT PERSON: James Gallaher PHONE: (830) 625-1288  
(Please Print)

Customer Reference Number (if issued): CN 601399827 (nine digits)

Regulated Entity Reference Number (if issued): RN 102745890 (nine digits)

**Austin Regional Office (3373)**

☐ Hays ☐ Travis ☐ Williamson

**San Antonio Regional Office (3362)**

☐ Bexar ☒ Comal ☐ Medina ☐ Kinney ☐ Uvalde

Application fees must be paid by check, certified check, or money order, payable to the **Texas Commission on Environmental Quality**. Your canceled check will serve as your receipt. **This form must be submitted with your fee payment.** This payment is being submitted to (Check One):

☐ **Austin Regional Office**

☒ **San Antonio Regional Office**

☐ **Mailed to TCEQ:**

TCEQ - Cashier  
Revenues Section  
Mail Code 214  
P.O. Box 13088  
Austin, TX 78711-3088

☐ **Overnight Delivery to TCEQ:**

TCEQ - Cashier  
12100 Park 35 Circle  
Building A, 3rd Floor  
Austin, TX 78753  
512/239-1278

**Site Location (Check All That Apply):** ☒ Recharge Zone ☐ Contributing Zone ☐ Transition Zone

Type of Plan	Size	Fee Due
Water Pollution Abatement Plan, Contributing Zone Plan: One Single Family Residential Dwelling	Acres	\$
Water Pollution Abatement Plan, Contributing Zone Plan: Multiple Single Family Residential and Parks	Acres	\$
Water Pollution Abatement Plan, Contributing Zone Plan: Non-residential	8.05 Acres	\$ 5000.00
Sewage Collection System	L.F.	\$
Lift Stations without sewer lines	Acres	\$
Underground or Aboveground Storage Tank Facility	Tanks	\$
Piping System(s)(only)	Each	\$
Exception	Each	\$
Extension of Time	Each	\$

Signature

Date

If you have questions on how to fill out this form or about the Edwards Aquifer protection program, please contact us at 210/490-3096 for projects located in the San Antonio Region or 512/339-2929 for projects located in the Austin Region.

Individuals are entitled to request and review their personal information that the agency gathers on its forms. They may also have any errors in their information corrected. To review such information, contact us at 512/239-3282.



Texas Commission on Environmental Quality  
Edwards Aquifer Protection Program  
**Application Fee Schedule**  
30 TAC Chapter 213 (effective 05/01/2008)

**Water Pollution Abatement Plans and Modifications  
Contributing Zone Plans and Modifications**

PROJECT	PROJECT AREA IN ACRES	FEE
One Single Family Residential Dwelling	< 5	\$650
Multiple Single Family Residential and Parks	< 5	\$1,500
	5 < 10	\$3,000
	10 < 40	\$4,000
	40 < 100	\$6,500
	100 < 500	\$8,000
	≥ 500	\$10,000
Non-residential (Commercial, industrial, institutional, multi-family residential, schools, and other sites where regulated activities will occur)	< 1	\$3,000
	1 < 5	\$4,000
	5 < 10	\$5,000
	10 < 40	\$6,500
	40 < 100	\$8,000
	≥ 100	\$10,000

**Organized Sewage Collection Systems and Modifications**

PROJECT	COST PER LINEAR FOOT	MINIMUM FEE MAXIMUM FEE
Sewage Collection Systems	\$0.50	\$650 - \$6,500

**Underground and Aboveground Storage Tank System Facility Plans and Modifications**

PROJECT	COST PER TANK OR PIPING SYSTEM	MINIMUM FEE MAXIMUM FEE
Underground and Aboveground Storage Tank Facility	\$650	\$650 - \$6,500

**Exception Requests**

PROJECT	FEE
Exception Request	\$500

**Extension of Time Requests**

PROJECT	FEE
Extension of Time Request	\$150



FREEDOM FELLOWSHIP CHURCH  
410 OAK RUN POINT (830) 625-1288  
NEW BRAUNFELS, TX 78132

JEFFERSON STATE BANK  
SAN ANTONIO, TX 78201-4771  
30-76/1140

14008

2/14/12

PAY TO THE  
ORDER OF

Texas Commission on Environmental Quality \$ 5000.00  
Five thousand and ———— <sup>kw</sup>  
100 DOLLARS

MEMO

*JA Arizma*  
AUTHORIZED SIGNATURE

⑈014008⑈ ⑈114000763⑈

⑈1 0105805⑈





TCEQ Use Only

# TCEQ Core Data Form

For detailed instructions regarding completion of this form, please read the Core Data Form Instructions or call 512-239-5175.

## SECTION I: General Information

<b>1. Reason for Submission</b> (If other is checked please describe in space provided)	
<input checked="" type="checkbox"/> New Permit, Registration or Authorization (Core Data Form should be submitted with the program application)	
<input type="checkbox"/> Renewal (Core Data Form should be submitted with the renewal form)	<input type="checkbox"/> Other
<b>2. Attachments</b> Describe Any Attachments: (ex. Title V Application, Waste Transporter Application, etc.)	
<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	Modification of Previously Approved WPAP
<b>3. Customer Reference Number (if issued)</b>	Follow this link to search for CN or RN numbers in Central Registry**
CN 601399827	<b>4. Regulated Entity Reference Number (if issued)</b>
	RN 102745890

## SECTION II: Customer Information

<b>5. Effective Date for Customer Information Updates (mm/dd/yyyy)</b>		
<b>6. Customer Role (Proposed or Actual) – as it relates to the Regulated Entity listed on this form. Please check only one of the following:</b>		
<input type="checkbox"/> Owner	<input type="checkbox"/> Operator	<input type="checkbox"/> Owner & Operator
<input type="checkbox"/> Occupational Licensee	<input type="checkbox"/> Responsible Party	<input type="checkbox"/> Voluntary Cleanup Applicant <input type="checkbox"/> Other: _____
<b>7. General Customer Information</b>		
<input type="checkbox"/> New Customer	<input checked="" type="checkbox"/> Update to Customer Information	<input type="checkbox"/> Change in Regulated Entity Ownership
<input type="checkbox"/> Change in Legal Name (Verifiable with the Texas Secretary of State)	<input type="checkbox"/> No Change**	
**If "No Change" and Section I is complete, skip to Section III – Regulated Entity Information.		
<b>8. Type of Customer:</b>	<input type="checkbox"/> Corporation	<input type="checkbox"/> Individual
	<input type="checkbox"/> City Government	<input type="checkbox"/> County Government
	<input type="checkbox"/> Other Government	<input type="checkbox"/> General Partnership
	<input type="checkbox"/> Limited Partnership	<input type="checkbox"/> Sole Proprietorship- D.B.A
	<input type="checkbox"/> State Government	<input type="checkbox"/> Other: _____
<b>9. Customer Legal Name</b> (If an individual, print last name first: ex: Doe, John)		If new Customer, enter previous Customer below
		End Date:
<b>10. Mailing Address:</b>		
City	State	ZIP
		ZIP + 4
<b>11. Country Mailing Information</b> (if outside USA)	<b>12. E-Mail Address</b> (if applicable) james@freedomnb.org	
<b>13. Telephone Number</b>	<b>14. Extension or Code</b>	<b>15. Fax Number</b> (if applicable)
( ) -		( ) -
<b>16. Federal Tax ID</b> (9 digits)	<b>17. TX State Franchise Tax ID</b> (11 digits)	<b>18. DUNS Number</b> (if applicable)
		<b>19. TX SOS Filing Number</b> (if applicable)
<b>20. Number of Employees</b>		<b>21. Independently Owned and Operated?</b>
<input type="checkbox"/> 0-20 <input type="checkbox"/> 21-100 <input type="checkbox"/> 101-250 <input type="checkbox"/> 251-500 <input type="checkbox"/> 501 and higher		<input type="checkbox"/> Yes <input type="checkbox"/> No

## SECTION III: Regulated Entity Information

<b>22. General Regulated Entity Information</b> (If "New Regulated Entity" is selected below this form should be accompanied by a permit application)	
<input type="checkbox"/> New Regulated Entity	<input type="checkbox"/> Update to Regulated Entity Name <input checked="" type="checkbox"/> Update to Regulated Entity Information <input type="checkbox"/> No Change** (See below)
**If "NO CHANGE" is checked and Section I is complete, skip to Section IV, Preparer Information.	
<b>23. Regulated Entity Name</b> (name of the site where the regulated action is taking place)	
Freedom Fellowship Church	



24. Street Address of the Regulated Entity: (No P.O. Boxes)							
	City		State		ZIP		ZIP + 4
25. Mailing Address:							
	City		State		ZIP		ZIP + 4
26. E-Mail Address:							
27. Telephone Number		28. Extension or Code		29. Fax Number (if applicable)			
( ) -		-		( ) -			
30. Primary SIC Code (4 digits)		31. Secondary SIC Code (4 digits)		32. Primary NAICS Code (5 or 6 digits)		33. Secondary NAICS Code (5 or 6 digits)	
34. What is the Primary Business of this entity? (Please do not repeat the SIC or NAICS description.)							

Questions 34 - 37 address geographic location. Please refer to the instructions for applicability.

35. Description to Physical Location:					
36. Nearest City		County		State	
37. Latitude (N) In Decimal:		29.72282		38. Longitude (W) In Decimal:	
98.17347					
Degrees	Minutes	Seconds	Degrees	Minutes	Seconds
.29	43	22	98	10	25

39. TCEQ Programs and ID Numbers Check all Programs and write in the permits/registration numbers that will be affected by the updates submitted on this form or the updates may not be made. If your Program is not listed, check other and write it in. See the Core Data Form instructions for additional guidance.

<input type="checkbox"/> Dam Safety	<input type="checkbox"/> Districts	<input type="checkbox"/> Edwards Aquifer	<input type="checkbox"/> Industrial Hazardous Waste	<input type="checkbox"/> Municipal Solid Waste
<input type="checkbox"/> New Source Review - Air	<input type="checkbox"/> OSSF	<input type="checkbox"/> Petroleum Storage Tank	<input type="checkbox"/> PWS	<input type="checkbox"/> Sludge
<input type="checkbox"/> Stormwater	<input type="checkbox"/> Title V - Air	<input type="checkbox"/> Tires	<input type="checkbox"/> Used Oil	<input type="checkbox"/> Utilities
<input type="checkbox"/> Voluntary Cleanup	<input type="checkbox"/> Waste Water	<input type="checkbox"/> Wastewater Agriculture	<input type="checkbox"/> Water Rights	<input type="checkbox"/> Other:


#### SECTION IV: Preparer Information

40. Name:	John J. Moy, Jr., P.E.			41. Title:	Civil Engineer
42. Telephone Number	43. Ext./Code	44. Fax Number	45. E-Mail Address		
(830)629-2563	-	(830)629-2564	johnmoy711@sbcglobal.net		

#### SECTION V: Authorized Signature

46. By my signature below, I certify, to the best of my knowledge, that the information provided in this form is true and complete, and that I have signature authority to submit this form on behalf of the entity specified in Section II, Field 9 and/or as required for the updates to the ID numbers identified in field 39.

(See the Core Data Form instructions for more information on who should sign this form.)

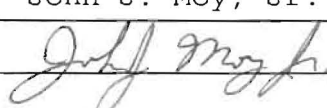Company:	Pawelek & Moy, Inc.	Job Title:	Project Engineer
Name (In Print):	John J. Moy, Jr.	Phone:	(830)629-2563
Signature:		Date:	2/21/12