Permit Number: 108588



## Comal County OFFICE OF COMAL COUNTY ENGINEER

## License to Operate On-Site Sewage Treatment and Disposal Facility

Location Description: 1979 INCROCIATO

**NEW BRAUNFELS, TX 78132** 

Subdivision: Vintage Oaks at the Vineyard

Unit: 6 Lot: 1030

Block: Acreage:

02/21/2019

Type of System: Aerobic

Issued This Date:

Surface Irrigation

Issued to: Century Land Holdings, II, LLC

This license is authorization for the owner to operate and maintain a private facility at the location described in accordance to the rules and regulations for on-site sewerage facilities of Comal County, Texas, and the Texas Commission on Environmental Quality.

The license grants permission to operate the facility. It does not guarantee successful operation. It is the responsibility of the owner to maintain and operate the facility in a satisfactory manner.

Alterations to this permit including, but not limited to:

- Increase in the square feet of living area
- Increase in the number of bedrooms
- A change of use (i.e. residential to commercial)
- Relocation of system components (including the relocation of spray heads)
- Installation of landscaping
- Adding new structures to the system

may require a new permit. It is the responsibility of the owner to apply for a new permit, if applicable.

Inspection and licensing of a facility indicates only that the facility meets certain minimum requirements. It does not impede any governmental entity in taking the proper steps to prevent or control pollution, to abate nuisance, or to protect the public health.

This license to operate is valid for an indefinite period. The holder may transfer it to a succeeding owner, provided the facility has not been remodeled and is functioning properly.

Licensing Authority

Comal County Environmental Health

US8497

NVIRONMENTAL HEALTH INSPECTOR

RONMENTAL HEARTH COORDINATOR

OS0007722

Installer Name: 0	B. 54	tre /		OSSF Installer #:	50018531	
1st Inspection I	Date: 2 /	5/19	2nd Inspection Date:	2.15.19	3rd Inspection Date:	
Inspector Name:	mike	7.	Inspector Name:	Mike T.	Inspector Name:	

Permit#: 108588	Address: Viwtage	e Oaks / 1979	INCROC!	ato	PR
SITE AND SOIL CONDITIONS & SETBACK DISTANCES Site and Soil Conditions Consistent with Submitted Planning Materials	Anwser Citations  285.31(a)  285.30(b)(1)(A)(iv)  285.30(b)(1)(A)(iii)  285.30(b)(1)(A)(iii)  285.30(b)(1)(A)(ii)  285.30(b)(1)(A)(ii)	Notes	2/5/19	2nd Insp.	3rd Insp.
SITE AND SOIL CONDITIONS & SETBACK DISTANCES Setback Distances Meet Minimum Standards	285.91(10) 285.30(b)(4) 285.31(d)				
SEWER PIPE Proper Type Pipe from Structure to Disposal System (Cast Iron, Ductile Iron, Sch. 40, SDR 26)	285.32(a)(1)				
SEWER PIPE Slope from the Sewer to the Tank at least 1/8 Inch Per Foot	285.32(a)(3)	·			
SEWER PIPE Two Way Sanitary - Type Cleanout Properly Installed (Add. C/O Every 100' &/or 90 degree bends)	285.32(a)(5)				
PRETREATMENT Installed (if required) TCEQ Approved List PRETREATMENT Septic Tank(s) Meet Minimum Requirements	285.32(b)(1)(G)285.32(b)(1 )(E)(iii)  285.32(b)(1)(E)(iv)  285.32(b)(1)(F)  285.32(b)(1)(C)(i)  285.32(b)(1)(C)(ii)  285.32(b)(1)(D)  285.32(b)(1)(E)  285.32(b)(1)(E)  285.32(b)(1)(E)  285.32(b)(1)(E)(ii)  285.32(b)(1)(E)(ii)  285.32(b)(1)(E)(ii)				
PRETREATMENT Grease Interceptors if required for commercial	285.34(d)				

2.15.19

Tank set, Leveled Leave Towk open (wet) openational

Cavered W/O Tank check can insteller.

No.	- Addition	Anwser Citations	Notes	1st insp.	2nd Insp.	3rd Insp.
	SEPTIC TANK Tank(s) Clearly Marked SEPTIC TANK If SingleTank, 2 Compartments Provided with Baffle SEPTIC TANK Inlet Flowline Greater than 3" and " T " Provided on Inlet and Outlet SEPTIC TANK Septic Tank(s) Meet Minimum Requirements	285.32(b)(1)(E) 285.91(2) 285.32(b)(1)(F) 285.32(b)(1)(E)(iii) 285.32(b)(1)(E)(ii)(II) 285.32(b)(1)(E)(ii)(I) 285.32(b)(1)(E)(ii) 285.32(b)(1)(D) 285.32(b)(1)(C)(ii) 285.32(b)(1)(C)(ii) 285.32(b)(1)(B) 285.32(b)(1)(A) 285.32(b)(1)(A)				
	ALL TANKS Installed on 4" Sand Cushion/ Proper Backfill Used	285.32(b)(1)(F) 285.32(b)(1)(G) 285.34(b)				
	SEPTIC TANK Inspection / Clean Out Port & Risers Provided on Tanks Buried Greater than 12" Sealed and Capped	285.38(d)				
1	SEPTIC TANK Secondary restraint system provided SEPTIC TANK Riser permanently fastened to lid or cast into tank SEPTIC TANK Riser cap protected against unauthorized intrusions	285.38(d) 285.38(e)				
2	SEPTIC TANK Tank Volume Installed					
Ī	PUMP TANK Volume Installed					
3	AEROBIC TREATMENT UNIT Size Installed		600	2/5/19		
4	AEROBIC TREATMENT UNIT Manufacturer AEROBIC TREATMENT UNIT Model Number		Cleanstream			
6	DISPOSAL SYSTEM Absorptive	285.33(a)(4) 285.33(a)(1) 285.33(a)(2) 285.33(a)(3)				
	DISPOSAL SYSTEM Leaching Chamber	285.33(a)(1) 285.33(a)(3) 285.33(a)(4) 285.33(a)(2)				
8	DISPOSAL SYSTEM Evapo- transpirative	285.33(a)(3) 285.33(a)(4) 285.33(a)(1) 285.33(a)(2)				

No.	Description Anws		Notes	1st Insp.	2nd Insp.	3rd Insp.
DISPO	OSAL SYSTEM Drip Irrigation	285.33(a)(1)				
		285.33(a)(3)				
		285.33(a)(4)				
		285.33(a)(2)				
9		20000(0)(0)				
DISPO	OSAL SYSTEM Soil	205 22/4//4)				
Subst	titution	285.33(d)(4)				
.0		285.33(a)(4)	Market Committee			
	OSAL SYSTEM Pumped				1 0-10-10	4
Efflue	ent	285.33(a)(3)				
1		285.33(a)(1)			100	
	OSAL SYSTEM Gravelless Pipe	285.33(a)(3)				
DISFC	DSAL STSTEIN Gravelless Fipe					
		285.33(a)(2)				1
		285.33(a)(4)				
		285.33(a)(1)				
22		202 201 1/21				
DISPO	OSAL SYSTEM Mound	285.33(a)(3)		ALCO DE LA CONTRACTOR DE		1880
3		285.33(a)(1)		The state of the state of		
188	1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 -	285.33(a)(2)			1	68
		285.33(a)(4)			100	1
23		M Kissels Sister	The state of the s			
	OSAL SYSTEM Other	285.33(d)(6)				
(desc	cribe) (Approved Design)	285.33(c)(4)				
		200.00(0)(4)				
24						
	NFIELD Absorptive Drainline					
3" PV	/C					
or 4"	PVC					100
23	NFIELD Area Installed					
26 DRAI	IN ILLO AICO INSTONEO					
	NFIELD Level to within 1 inch					0,00
	25 feet and within 3 inches					
		285.33(b)(1)(A)(v)				
over	entire excavation					Pillar Service
27						
DRAI	NFIELD Excavation Width					
	INFIELD Excavation Depth					
	NFIELD Excavation					
					1 1-1-4-	
	ration DRAINFIELD Depth of					18.
	us Media					
DRAI	NFIELD Type of Porous					125/2
Medi	ia					
				1		
1				1 2 1 1 1		4
28						THE STATE OF
	INFIELD Pipe and Gravel -		to the second se	and the state of t		
Goot	textile Fabric in Place	285.33(b)(1)(E)			1000	
29						
	INFIELD Leaching Chambers	all the second				
	INFIELD Chambers - Open					
End I	Plates w/Splash Plate,	A CANADA TO A CANADA		1 2 3 6		1000
	ection Port & Closed End	205 22/-1/21		1000		
	es in Place (per	285.33(c)(2)		1.		1
	ufacturers spec.)			1		1
mali	and the specif			1		
30		(18)		1		
	/ PRESSURE DISPOSAL					
	EM Adequate Trench Length					
	idth, and Adequate	285.33(d)(1)(C)(i)				
Sepa	aration Distance between					
	nches					
Hiten					1	4

lo. Description	Anwser	Citations	Notes	1st Insp.	2nd Insp.	3rd Insp.
EFFLUENT DISPOSAL SYSTEM Utilized Only by Single Family Dwelling EFFLUENT DISPOSAL SYSTEM Topographic Slopes < 2.0% EFFLUENT DISPOSAL SYSTEM Adequate Length of Drain Field ( 1000 Linear ft. for 2 bedrooms or Less & an additional 400 ft. for each additional bedroom ) EFFLUENT DISPOSAL SYSTEM Lateral Depth of 18 inches to 3 ft. & Vertical Separation of 1ft on bottom and 2 ft. to restrictive horizon and ground water respectfully EFFLUENT DISPOSAL SYSTEM Lateral Drain Pipe (1.25 - 1.5" dia.) & Pipe Holes ( 3/16 - 1/4" dia. Hole Size ) 5 ft. Apart		285.33(b)(3)(A) 285.33(b)(3)(A) 285.33(b)(3)(B) 285.91(13) 285.33(b)(3)(D) 285.33(b)(3)(F)				
AEROBIC TREATMENT UNIT IS						
Aerobic Unit Installed According to Approved Guidelines.		285.32(c)(1)		2/5/19		
3	I I I I I I I I I I I I I I I I I I I	***				
AEROBIC TREATMENT UNIT						
Inspection/Clean Out Port & Risers Provided						
AEROBIC TREATMENT UNIT						
Secondary restraint system	1 /					
provided AEROBIC TREATMENT						The state of the s
UNIT Riser permanently fastened to lid or cast into tank				00		
AEROBIC TREATMENT UNIT Riser						
cap protected against		подоставления				
unauthorized intrusions						
AEROBIC TREATMENT UNIT						
Chlorinator Properly Installed						
with Chlorine Tablets in Place.				1 3000 3 500000		
PUMP TANK Is the Pump Tank an						
approved concrete tank or other						
acceptable materials &						
construction PUMP TANK Sampling Port						
Provided in the Treated Effluent						
Line						
PUMP TANK Check Valve and/or						
Anti- Siphon Device Present						
When Required						
PUMP TANK Audible and Visual High Water Alarm Installed on						
Separate Circuit From Pump						
6	100000000000000000000000000000000000000					
PUMP TANK Inspection/Clean Out Port & Risers Provided						
PUMP TANK Secondary restraint						
system provided						
PUMP TANK Riser permanently						
fastened to lid or cast into tank						
PUMP TANK Riser cap protected against unauthorized intrusions						
Same disactionized intrasions						
						1
PUMP TANK Secondary restraint						

	PUMP TANK Electrical		- Icha	
	Connections in Approved Junction		2/3/19	-
39	Boxes / Wiring Buried			

No.	Description	Anwser	Citations	Notes	1st insp.	2nd Insp.	3rd insp.
	APPLICATION AREA Distribution Pipe, Fitting, Sprinkler Heads & Valve Covers Color Coded Purple?		285.33(d)(2)(G)(iii)(II)285.3 3(d)(2)(G)(iii)(III)285.33(d)( 2)(G)(v) 285.33(d)(2)(G)(iii) 285.33(d)(2)(G)(iv) 285.33(d)(2)(G)(i) 285.33(d)(2)(G)(ii) 285.33(d)(2)(G)(iii)(I)		2/5/19		
	APPLICATION AREA Low Angle Nozzles Used / Pressure is as required APPLICATION AREA Acceptable Area, nothing within 10 ft of sprinkler heads? APPLICATION AREA The Landscape Plan is as Designed		285.33(d)(2)(G)(i) 285.33(d)(2)(A) 285.33(d)(2)(F)				
	APPLICATION AREA Area Installed						
42	PUMP TANK Meets Minimum Reserve Capacity Requirements						
44	PUMP TANK Material Type & Manufacturer		- AND SAN				
45	PUMP TANK Type/Size of Pump Installed						

	1st Inspection Date: 2/	5/19	2nd Inspection Date:	3rd Inspection Date:  Inspector Name:				
	Permit#: 108588		Address: Viwtage	Oaka / /		INCROC,	ate	00
ło.		Anwser	Citations	Notes		1st Insp.	2nd Insp.	3rd Insp
	SITE AND SOIL CONDITIONS & SETBACK DISTANCES Site and Soil Conditions Consistent with Submitted Planning Materials		285.31(a) 285.30(b)(1)(A)(iv) 285.30(b)(1)(A)(v) 285.30(b)(1)(A)(iii) 285.30(b)(1)(A)(ii) 285.30(b)(1)(A)(i)			2/5/19		
2	SITE AND SOIL CONDITIONS & SETBACK DISTANCES Setback Distances Meet Minimum Standards	/	285.91(10) 285.30(b)(4) 285.31(d)					
3	SEWER PIPE Proper Type Pipe from Structure to Disposal System (Cast Iron, Ductile Iron, Sch. 40, SDR 26)	/	285.32(a)(1)					
1	SEWER PIPE Slope from the Sewer to the Tank at least 1/8 Inch Per Foot	/	285.32(a)(3)					
	SEWER PIPE Two Way Sanitary - Type Cleanout Properly Installed (Add. C/O Every 100' &/or 90 degree bends)	/	285.32(a)(5)					
	PRETREATMENT Installed (if required) TCEQ Approved List PRETREATMENT Septic Tank(s) Meet Minimum Requirements		285.32(b)(1)(G)285.32(b)(1 )(E)(iii) 285.32(b)(1)(E)(iv) 285.32(b)(1)(F) 285.32(b)(1)(C)(i) 285.32(b)(1)(C)(ii) 285.32(b)(1)(C)(ii) 285.32(b)(1)(D) 285.32(b)(1)(E) 285.32(b)(1)(E) 285.32(b)(1)(E) 285.32(b)(1)(E)(ii)(II) 285.32(b)(1)(E)(ii)(II) 285.32(b)(1)(E)(ii)(II) 285.32(b)(1)(E)(ii)(II)					
6	PRETREATMENT Grease							
	Interceptors if required for commercial		285.34(d)					

Tank set, Leveled Leave Tank open (wet) openational


lo.		Anwser	Citations	Notes	1st Insp.	2nd Insp.	3rd insp.
	SEPTIC TANK Tank(s) Clearly Marked SEPTIC TANK If SingleTank, 2 Compartments Provided with Baffle SEPTIC TANK Inlet Flowline Greater than 3" and " T " Provided on Inlet and Outlet SEPTIC TANK Septic Tank(s) Meet Minimum Requirements		285.32(b)(1)(E) 285.91(2) 285.32(b)(1)(E)(iii) 285.32(b)(1)(E)(iii)(II) 285.32(b)(1)(E)(ii)(II) 285.32(b)(1)(E)(ii) 285.32(b)(1)(D) 285.32(b)(1)(C)(ii) 285.32(b)(1)(C)(ii) 285.32(b)(1)(C)(ii) 285.32(b)(1)(C)(ii) 285.32(b)(1)(C)(ii) 285.32(b)(1)(C)(ii) 285.32(b)(1)(C)(ii)				
	ALL TANKS Installed on 4" Sand Cushion/ Proper Backfill Used		285.32(b)(1)(F) 285.32(b)(1)(G) 285.34(b)				
	SEPTIC TANK Inspection / Clean Out Port & Risers Provided on Tanks Buried Greater than 12" Sealed and Capped		285.38(d)				
1	SEPTIC TANK Secondary restraint system provided SEPTIC TANK Riser permanently fastened to lid or cast into tank SEPTIC TANK Riser cap protected against unauthorized intrusions		285.38(d) 285.38(e)				
2	SEPTIC TANK Tank Volume Installed						
3	PUMP TANK Volume Installed						
	AEROBIC TREATMENT UNIT Size Installed			600	2/5/19		
5	AEROBIC TREATMENT UNIT Manufacturer AEROBIC TREATMENT UNIT Model Number	_		Cleanstdeam			
	DISPOSAL SYSTEM Absorptive		285.33(a)(4) 285.33(a)(1) 285.33(a)(2) 285.33(a)(3)				
5	DISPOSAL SYSTEM Leaching Chamber		285.33(a)(1) 285.33(a)(3) 285.33(a)(4) 285.33(a)(2)				
8	DISPOSAL SYSTEM Evapo- transpirative		285.33(a)(3) 285.33(a)(4) 285.33(a)(1) 285.33(a)(2)				

io.		Anwser	Citations	Notes	1st Insp.	2nd Insp.	3rd Insp.
	DISPOSAL SYSTEM Drip Irrigation		285.33(a)(1) 285.33(a)(3) 285.33(a)(4) 285.33(a)(2)				
9	DISPOSAL SYSTEM Soil						
)	Substitution		285.33(d)(4)				
1	DISPOSAL SYSTEM Pumped Effluent		285.33(a)(4) 285.33(a)(3) 285.33(a)(1)				
2	DISPOSAL SYSTEM Gravelless Pipe		285.33(a)(3) 285.33(a)(2) 285.33(a)(4) 285.33(a)(1)				
3	DISPOSAL SYSTEM Mound		285.33(a)(3) 285.33(a)(1) 285.33(a)(2) 285.33(a)(4)				
4	DISPOSAL SYSTEM Other (describe) (Approved Design)		285.33(d)(6) 285.33(c)(4)				
5	DRAINFIELD Absorptive Drainline 3" PVC or 4" PVC						
5	DRAINFIELD Area Installed						
	DRAINFIELD Level to within 1 inch per 25 feet and within 3 inches over entire excavation		285.33(b)(1)(A)(v)				
7	DRAINFIELD Excavation Width DRAINFIELD Excavation Depth DRAINFIELD Excavation Separation DRAINFIELD Depth of Porous Media DRAINFIELD Type of Porous Media						
8	DRAINFIELD Pipe and Gravel - Geotextile Fabric in Place		285.33(b)(1)(E)				
29	DRAINFIELD Leaching Chambers DRAINFIELD Chambers - Open End Plates w/Splash Plate, Inspection Port & Closed End Plates in Place (per manufacturers spec.)		285.33(c)(2)				
31	LOW PRESSURE DISPOSAL SYSTEM Adequate Trench Length & Width, and Adequate Separation Distance between Trenches		285.33(d)(1)(C)(i)				

EFFLUENT DISPOSAL SYSTEM Clowby System Semily Dredling (FFLUENT DISPOSAL SYSTEM Cloops spike Size (MOSAL SYSTEM ADMINISTRATED AND CONTROL SYSTEM ADMINISTRATED STATEM ADMINISTRAT		Description	Anwser	Citations	Notes	1st Insp.	2nd Insp.	3rd Insp.
AEROBIC TREATMENT UNIT IS Aerobic Unit Installed According to Approved Guidelines.  AEROBIC TREATMENT UNIT Inspection/Clean Out Port & Risers Provided AEROBIC TREATMENT UNIT Secondary restraint system provided AEROBIC TREATMENT UNIT Riser permanently fastened to lid or cast into tank AEROBIC TREATMENT UNIT Riser permanently fastened to lid or cast into tank AEROBIC TREATMENT UNIT Riser cap protected against unauthorized intrusions  AEROBIC TREATMENT UNIT Chlorinator Properly Installed with Chlorine Tablets in Place.  PUMP TAIN Is the Pump Tank an approved concrete tank or other acceptable materials & construction PUMP TANK Sampling Port Provided in the Treated Effluent Une PUMP TANK Audible and Visual High Water Alarm Installed on Separate Circuit From Pump 100 PUMP TANK Audible and Visual High Water Alarm Installed on Separate Circuit From Pump PUMP TANK Subspice on Separate Circuit From Pump PUMP TANK Secondary restraint system provided PUMP TANK Secondary restraint system provided PUMP TANK Secondary restraint system provided PUMP TANK Riser cap protected	Only by EFFLUEI Topogra < 2.0% E Adequa Linear fi & an ad addition EFFLUEI Depth o Separat restricti respecti EFFLUEI Drain Pi Holes (	y Single Family Dwelling ENT DISPOSAL SYSTEM raphic Slopes EFFLUENT DISPOSAL SYSTEM ate Length of Drain Field ( 1000 ft. for 2 bedrooms or Less diditional 400 ft. for each mal bedroom ) ENT DISPOSAL SYSTEM Lateral of 18 inches to 3 ft. & Vertical tion of 1ft on bottom and 2 ft. to tive horizon and ground water tfully ENT DISPOSAL SYSTEM Lateral Pipe (1.25 - 1.5" dia.) & Pipe		285.33(b)(3)(A) 285.33(b)(3)(B) 285.91(13) 285.33(b)(3)(D)				
Aerobic Unit Installed According to Approved Guidelines.  AEROBIC TREATMENT UNIT Inspection/Clean Out Port & Risers Provided AEROBIC TREATMENT UNIT Secondary restraint system provided AEROBIC TREATMENT UNIT Riser permanently fastened to lid or cast into tank AEROBIC TREATMENT UNIT Riser cap protected against unauthorized intrusions  AEROBIC TREATMENT UNIT Chlorinator Properly Installed with Chlorina Tablets in Place.  PUMP TANK is the Pump Tank an approved concrete tank or other acceptable materials & construction PUMP TANK Sampling Port Provided in the Treated Effluent Line PUMP TANK Check Valve and/or Anti-Siphon Device Present When Required PUMP TANK dudible and Visual High Water Alarm Installed on Separate Circuit From Pump 55  PUMP TANK Inspection/Clean Out Port & Risers Provided PUMP TANK Secondary restraint system provided PUMP TANK Secondary restraint system provided PUMP TANK Riser cap protected PUMP TANK Riser cap protected	AFROE	BIC TREATMENT UNIT IS						
ARROBIC TREATMENT UNIT Inspection/Clean Out Port & Risers Provided ARROBIC TREATMENT UNIT Secondary restraint system provided AEROBIC TREATMENT UNIT Riser permanently fastened to lid or cast into tank AEROBIC TREATMENT UNIT Riser cap protected against unauthorized intrusions  AEROBIC TREATMENT UNIT Chlorinator Properly Installed ss with Chlorine Tablets in Place. PUMP TANK Is the Pump Tank an approved concrete tank or other acceptable materials & construction PUMP TANK Sampling Port Provided in the Treated Effluent Une PUMP TANK Check Valve and/or Anti-Siphon Device Present When Required PUMP TANK Audible and Visual High Water Alarm Installed on Separate Circuit From Pump  PUMP TANK Riser Sprovided PUMP TANK Riser Sprovided PUMP TANK Riser cap protected PUMP TANK Riser cap protected				285 32(c)(1)		2/5/19		
AEROBIC TREATMENT UNIT Inspection/Clean Out Port & Risers Provided AEROBIC TREATMENT UNIT Secondary restraint system provided AEROBIC TREATMENT UNIT Riser permanently fastened to lid or cast into tank AEROBIC TREATMENT UNIT Riser cap protected against unauthorized intrusions  AEROBIC TREATMENT UNIT Chlorinator Properly installed st with Chlorine Tablets in Place.  PUMP TANK Is the Pump Tank an approved concrete tank or other acceptable materials & construction PUMP TANK Sampling Port Provided in the Treated Effluent Line PUMP TANK Asampling Port Provided in the Treated Effluent Line PUMP TANK Audible and Visual High Water Alarm Installed on Separate Circuit From Pump  PUMP TANK Inspection/Clean Out Port & Risers Provided PUMP TANK Secondary restraint system provided PUMP TANK Riser cap protected	to App	proved Guidelines.		203.32(0)(1)		2/3/11		
Risers Provided ARROBIC TREATMENT UNIT Secondary restraint system provided AEROBIC TREATMENT UNIT Riser permanently fastened to lid or cast into tank AEROBIC TREATMENT UNIT Riser cap protected against unauthorized intrusions  AEROBIC TREATMENT UNIT Chlorinator Properly Installed with Chlorine Tablets in Place. PUMP TANK is the Pump Tank an approved concrete tank or other acceptable materials & construction PUMP TANK Sampling Port Provided in the Treated Effluent Line PUMP TANK Check Valve and/or Anti-Siphon Device Present When Required PUMP TANK Audible and Visual High Water Alarm Installed on Separate Circuit From Pump  PUMP TANK Inspection/Clean Out Port & Risers Provided PUMP TANK Secondary restraint system provided PUMP TANK Riser cap protected	AFROE	RIC TREATMENT LINIT						
AEROBIC TREATMENT UNIT Secondary restraint system provided AEROBIC TREATMENT UNIT Riser permanently fastened to lid or cast into tank AEROBIC TREATMENT UNIT Riser cap protected against unauthorized intrusions  AEROBIC TREATMENT UNIT Chlorinator Properly Installed with Chlorine Tablets in Place.  PUMP TANK is the Pump Tank an approved concrete tank or other acceptable materials & construction PUMP TANK Sampling Port Provided in the Treated Effluent Line PUMP TANK Check Valve and/or Anti-Siphon Device Present When Required PUMP TANK Audible and Visual High Water Alarm Installed on Separate Circuit From Pump  PUMP TANK Riser Frovided PUMP TANK Riser cap rotected PUMP TANK Riser cap protected								
Secondary restraint system provided AEROBIC TREATMENT UNIT Riser permanently fastened to lid or cast into tank AEROBIC TREATMENT UNIT Riser cap protected against unauthorized intrusions  AEROBIC TREATMENT UNIT Chlorinator Properly Installed stock the Chlorine Tablets in Place.  PUMP TANK Is the Pump Tank an approved concrete tank or other acceptable materials & construction PUMP TANK Sampling Port Provided in the Treated Effluent Line PUMP TANK Check Valve and/or Anti-Siphon Device Present When Required PUMP TANK Audible and Visual High Water Alarm Installed on Separate Circuit From Pump  PUMP TANK Inspection/Clean Out Port & Risers Provided PUMP TANK Secondary restraint system provided PUMP TANK Secondary restraint system provided PUMP TANK Riser cap protected	Risers	Provided						1
provided AEROBIC TREATMENT UNIT Riser permanently fastened to lid or cast into tank AEROBIC TREATMENT UNIT Riser cap protected against unauthorized intrusions  AEROBIC TREATMENT UNIT Chlorinator Properly Installed with Chlorine Tablets in Place.  PUMP TANK Is the Pump Tank an approved concrete tank or other acceptable materials & construction PUMP TANK Sampling Port Provided in the Treated Effluent Line PUMP TANK Check Valve and/or Anti-Siphon Device Present When Required PUMP TANK Audible and Visual High Water Alarm Installed on Separate Circuit From Pump  PUMP TANK Inspection/Clean Out Port & Risers Provided PUMP TANK Secondary restraint system provided PUMP TANK Riser cap protected								
UNIT Riser permanently fastened to lid or cast into tank AEROBIC TREATMENT UNIT Riser cap protected against unauthorized intrusions  AEROBIC TREATMENT UNIT Chlorinator Properly Installed with Chlorine Tablets in Place.  PUMP TANK Is the Pump Tank an approved concrete tank or other acceptable materials & construction PUMP TANK Sampling Port Provided in the Treated Effluent Line PUMP TANK Check Valve and/or Anti-Siphon Device Present When Required PUMP TANK Audible and Visual High Water Alarm Installed on Separate Circuit From Pump  PUMP TANK Insers Provided PUMP TANK Secondary restraint system provided PUMP TANK Secondary restraint system provided PUMP TANK Riser cap protected								1
to lid or cast into tank AEROBIC TREATMENT UNIT Riser cap protected against unauthorized intrusions  AEROBIC TREATMENT UNIT Chlorinator Properly Installed with Chlorine Tablets in Place.  PUMP TANK Is the Pump Tank an approved concrete tank or other acceptable materials & construction PUMP TANK Sampling Port Provided in the Treated Effluent Line PUMP TANK Check Valve and/or Anti-Siphon Device Present When Required PUMP TANK Audible and Visual High Water Alarm Installed on Separate Circuit From Pump 36 PUMP TANK Inspection/Clean Out Port & Risers Provided PUMP TANK Secondary restraint system provided PUMP TANK Riser cap protected							and the same of th	
cap protected against unauthorized intrusions  AEROBIC TREATMENT UNIT Chlorinator Properly Installed with Chlorine Tablets in Place.  PUMP TANK Is the Pump Tank an approved concrete tank or other acceptable materials & construction PUMP TANK Sampling Port Provided in the Treated Effluent Line PUMP TANK Check Valve and/or Anti-Siphon Device Present When Required PUMP TANK Audible and Visual High Water Alarm Installed on Separate Circuit From Pump  PUMP TANK Inspection/Clean Out Port & Risers Provided PUMP TANK Secondary restraint system provided PUMP TANK Riser opermanently fastened to lid or cast into tank PUMP TANK Riser cap protected							reconstructed delication of the control of the cont	19
unauthorized intrusions  AEROBIC TREATMENT UNIT Chlorinator Properly Installed with Chlorine Tablets in Place.  PUMP TANK Is the Pump Tank an approved concrete tank or other acceptable materials & construction PUMP TANK Sampling Port Provided in the Treated Effluent Line PUMP TANK Check Valve and/or Anti- Siphon Device Present When Required PUMP TANK Audible and Visual High Water Alarm Installed on Separate Circuit From Pump  PUMP TANK Inspection/Clean Out Port & Risers Provided PUMP TANK Secondary restraint system provided PUMP TANK Riser cap protected	AEROE	BIC TREATMENT UNIT Riser						
AEROBIC TREATMENT UNIT Chlorinator Properly Installed with Chlorine Tablets in Place.  PUMP TANK Is the Pump Tank an approved concrete tank or other acceptable materials & construction PUMP TANK Sampling Port Provided in the Treated Effluent Line PUMP TANK Check Valve and/or Anti- Siphon Device Present When Required PUMP TANK Audible and Visual High Water Alarm Installed on Separate Circuit From Pump  PUMP TANK Inspection/Clean Out Port & Risers Provided PUMP TANK Secondary restraint system provided PUMP TANK Riser permanently fastened to lid or cast into tank PUMP TANK Riser cap protected	1 1							
AEROBIC TREATMENT UNIT Chlorinator Properly Installed with Chlorine Tablets in Place.  PUMP TANK Is the Pump Tank an approved concrete tank or other acceptable materials & construction PUMP TANK Sampling Port Provided in the Treated Effluent Line PUMP TANK Check Valve and/or Anti- Siphon Device Present When Required PUMP TANK Adible and Visual High Water Alarm Installed on Separate Circuit From Pump  PUMP TANK Inspection/Clean Out Port & Risers Provided PUMP TANK Secondary restraint system provided PUMP TANK Riser permanently fastened to lid or cast into tank PUMP TANK Riser cap protected	unauti	thorized intrusions			The state of the s			100
with Chlorine Tablets in Place.  PUMP TANK Is the Pump Tank an approved concrete tank or other acceptable materials & construction PUMP TANK Sampling Port Provided in the Treated Effluent Line PUMP TANK Check Valve and/or Anti- Siphon Device Present When Required PUMP TANK Audible and Visual High Water Alarm Installed on Separate Circuit From Pump  PUMP TANK Inspection/Clean Out Port & Risers Provided PUMP TANK Secondary restraint system provided PUMP TANK Riser cap protected	AERO	BIC TREATMENT UNIT	1					
PUMP TANK Is the Pump Tank an approved concrete tank or other acceptable materials & construction PUMP TANK Sampling Port Provided in the Treated Effluent Line PUMP TANK Check Valve and/or Anti- Siphon Device Present When Required PUMP TANK Audible and Visual High Water Alarm Installed on Separate Circuit From Pump  PUMP TANK Inspection/Clean Out Port & Risers Provided PUMP TANK Secondary restraint system provided PUMP TANK Riser permanently fastened to lid or cast into tank PUMP TANK Riser cap protected								
approved concrete tank or other acceptable materials & construction PUMP TANK Sampling Port Provided in the Treated Effluent Line PUMP TANK Check Valve and/or Anti- Siphon Device Present When Required PUMP TANK Audible and Visual High Water Alarm Installed on Separate Circuit From Pump  PUMP TANK Inspection/Clean Out Port & Risers Provided PUMP TANK Secondary restraint system provided PUMP TANK Riser permanently fastened to lid or cast into tank PUMP TANK Riser cap protected								
acceptable materials & construction PUMP TANK Sampling Port Provided in the Treated Effluent Line PUMP TANK Check Valve and/or Anti- Siphon Device Present When Required PUMP TANK Audible and Visual High Water Alarm Installed on Separate Circuit From Pump  PUMP TANK Inspection/Clean Out Port & Risers Provided PUMP TANK Secondary restraint system provided PUMP TANK Riser permanently fastened to lid or cast into tank PUMP TANK Riser cap protected								
construction PUMP TANK Sampling Port Provided in the Treated Effluent Line PUMP TANK Check Valve and/or Anti- Siphon Device Present When Required PUMP TANK Audible and Visual High Water Alarm Installed on Separate Circuit From Pump  PUMP TANK Inspection/Clean Out Port & Risers Provided PUMP TANK Secondary restraint system provided PUMP TANK Riser permanently fastened to lid or cast into tank PUMP TANK Riser cap protected								
Provided in the Treated Effluent Line PUMP TANK Check Valve and/or Anti- Siphon Device Present When Required PUMP TANK Audible and Visual High Water Alarm Installed on Separate Circuit From Pump  PUMP TANK Inspection/Clean Out Port & Risers Provided PUMP TANK Secondary restraint system provided PUMP TANK Riser permanently fastened to lid or cast into tank PUMP TANK Riser cap protected								
Line PUMP TANK Check Valve and/or Anti- Siphon Device Present When Required PUMP TANK Audible and Visual High Water Alarm Installed on Separate Circuit From Pump  PUMP TANK Inspection/Clean Out Port & Risers Provided PUMP TANK Secondary restraint system provided PUMP TANK Riser permanently fastened to lid or cast into tank PUMP TANK Riser cap protected								
PUMP TANK Check Valve and/or Anti- Siphon Device Present When Required PUMP TANK Audible and Visual High Water Alarm Installed on Separate Circuit From Pump  PUMP TANK Inspection/Clean Out Port & Risers Provided PUMP TANK Secondary restraint system provided PUMP TANK Riser permanently fastened to lid or cast into tank PUMP TANK Riser cap protected		ded in the Treated Effluent						
Anti- Siphon Device Present When Required PUMP TANK Audible and Visual High Water Alarm Installed on Separate Circuit From Pump  PUMP TANK Inspection/Clean Out Port & Risers Provided PUMP TANK Secondary restraint system provided PUMP TANK Riser permanently fastened to lid or cast into tank PUMP TANK Riser cap protected		D TANK Chack Valve and/or						
When Required PUMP TANK Audible and Visual High Water Alarm Installed on Separate Circuit From Pump  PUMP TANK Inspection/Clean Out Port & Risers Provided PUMP TANK Secondary restraint system provided PUMP TANK Riser permanently fastened to lid or cast into tank PUMP TANK Riser cap protected								
High Water Alarm Installed on Separate Circuit From Pump  PUMP TANK Inspection/Clean Out Port & Risers Provided PUMP TANK Secondary restraint system provided PUMP TANK Riser permanently fastened to lid or cast into tank PUMP TANK Riser cap protected								
Separate Circuit From Pump  PUMP TANK Inspection/Clean Out Port & Risers Provided PUMP TANK Secondary restraint system provided PUMP TANK Riser permanently fastened to lid or cast into tank PUMP TANK Riser cap protected								
PUMP TANK Inspection/Clean Out Port & Risers Provided PUMP TANK Secondary restraint system provided PUMP TANK Riser permanently fastened to lid or cast into tank PUMP TANK Riser cap protected								
Out Port & Risers Provided PUMP TANK Secondary restraint system provided PUMP TANK Riser permanently fastened to lid or cast into tank PUMP TANK Riser cap protected								
PUMP TANK Secondary restraint system provided PUMP TANK Riser permanently fastened to lid or cast into tank PUMP TANK Riser cap protected								
system provided PUMP TANK Riser permanently fastened to lid or cast into tank PUMP TANK Riser cap protected								
PUMP TANK Riser permanently fastened to lid or cast into tank PUMP TANK Riser cap protected								
fastened to lid or cast into tank PUMP TANK Riser cap protected								
lagainst linalitnorized intrilsions								
OBUILDE GUIDALINE GUIDA	again	nst unauthorized intrusions						
37								-
PUMP TANK Secondary restraint system provided								

	PUMP TANK Electrical			1-1	
	Connections in Approved Junction	/	AND THE PROPERTY OF THE PARTY O	2/5/19	
39	Boxes / Wiring Buried				

No.	Description	Anwser	Citations	Notes	1st insp.	2nd Insp.	3rd Insp.
	APPLICATION AREA Distribution Pipe, Fitting, Sprinkler Heads & Valve Covers Color Coded Purple?	/	285.33(d)(2)(G)(iii)(II)285.3 3(d)(2)(G)(iii)(III)285.33(d)( 2)(G)(v) 285.33(d)(2)(G)(iii) 285.33(d)(2)(G)(iv) 285.33(d)(2)(G)(ii) 285.33(d)(2)(G)(iii) 285.33(d)(2)(G)(iii)(I)		2/5/19		
40	APPLICATION AREA Low Angle						
41	Nozzles Used / Pressure is as required APPLICATION AREA Acceptable Area, nothing within 10 ft of sprinkler heads? APPLICATION AREA The Landscape Plan is as Designed		285.33(d)(2)(G)(i) 285.33(d)(2)(A) 285.33(d)(2)(F)				
	APPLICATION AREA Area Installed						
42							
43	PUMP TANK Meets Minimum Reserve Capacity Requirements						
44	PUMP TANK Material Type & Manufacturer						
45	PUMP TANK Type/Size of Pump Installed						

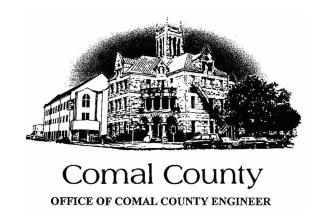

# Permit of Authorization to Construct an On-Site Sewage Facility Permit Valid For One Year From Date Issued

Permit Number: 108588

Issued This Date: 01/09/2019

This permit is hereby given to: Century Land Holdings, II, LLC

To start construction of a private, on-site sewage facility located at:

1979 INCROCIATO

NEW BRAUNFELS, TX 78132

Subdivision: Vintage Oaks at the Vineyard

Unit: 6

Lot: 1030

Block:

Acreage:

## APPROVED MINIMUM SIZES AS PER ATTACHED DESIGN

Type of System: Aerobic

**Surface Irrigation** 

This permit gives permission for the construction of the above referenced on-site facility to commence. Installation must be completed by an installer holding a valid registration card from the Texas Commission on Environmental Quality (TCEQ). Installation and inspection must comply with current TCEQ and Comal County requirements.

Call (830) 608-2090 to schedule inspections.

# \* \* \* COMAL COUNTY OFFICE OF ENVIRONMENTAL HEALTH \* \* \* APPLICATION FOR PERMIT FOR AUTHORIZATION TO CONSTRUCT AN ON-SITE SEWAGE FACILITY AND LICENSE TO OPERATE

Date	century Land Holdings, 11, LLC, a Colorado limi	ted	Permit #	108588
	ability company, D/B/A Century LH II, LLC	Agent Name	JB Septic Systems, Ir	nc
Mailing Address	s 6500 River Place Blvd. Building 2, Suite 200	-	P.O. Box 1609	
	Austin TX 78730	_	Helotes, Texas 78023	3
Phone #	512-271-3825	Phone #	830-931-0292	
Email	mary.timmons@centurycommunities.com	Email	info@jbsepticsystems	sinc.com
All corres	spondence should be sent to:  Owner  A	gent 🗌 Both	Method: 🗍 N	/ail 🗌 Email
Subdivision Nar	ne Vintage Oaks at the Vineyard	Unit 6	Lot 1030	Block
Acreage/Legal				
	dress 1979 Incrociato		Braunfels	Zip 78132
Type of Develo	pment:			
Single Far	nily Residential			RECEIVED
Type of Cor	nstruction (House, Mobile, RV, Etc.) House			DEC 04 and
Number of E	Bedrooms 4			DEC 31 2018
Indicate Sq	Ft of Living Area 2,745		CC	DUNTY ENGINEER
Commercia	al or Institutional Facility		•	LINGINEER
(Planning mate	erials must show adequate land area for doubling the	required land needed	for treatment units and o	disposal area)
Type of Fac	ility			
	tories, Churches, Schools, Parks, Etc Indicate		ants	
	, Lounges, Theaters - Indicate Number of Seats			
	, Hospital, Nursing Home - Indicate Number of E			
	er/RV Parks - Indicate Number of Spaces			
	us			
	st of Construction: \$ 350,000 (Struct			
Is any portion	of the proposed OSSF located in the United Stat	tes Army Corps of E	Engineers (USACE) flo	wage easement?
☐ Yes 🗵	No (if yes, owner must provide approval from USACE to	r proposed OSSF impro	vements within the USACE	flowage easement)
Source of Water	⊠ Public ☐ Private Well	<u></u>		
Are Water Saving	g Devices Being Utilized Within the Residence?	⊠ Yes □ No		
	olication, I certify that: optication and all additional information submitted doe	es not contain any fals	se information and does r	not conceal any material
site/soil evaluatio	ereby given to the permitting authority and designates on and inspection of private sewage facilities			
	a permit of authorization to construct will not be issue unty Flood Damage Prevention Order.	и инн тпе нооарыл	Auministrator has perior	med the reviews required
- I affirmatively con	sent to the online posting/public release of my e-mail	address associated v	with this permit applicatio	n, as applicable.
Men	Marin	12/14/1	8	
Signature of Q	waer	Date'		Page 1 of 2

## \* \* \* COMAL COUNTY OFFICE OF ENVIRONMENTAL HEALTH \* \* \* APPLICATION FOR PERMIT FOR AUTHORIZATION TO CONSTRUCT AN

# ON-SITE SEWAGE FACILITY AND LICENSE TO OPERATE

Planning Materials & Site Evaluation as Required Completed By	Jim W. Blake, Sr. #2289	
System Description Aerobic Treatment with Spray Irrigation		
Size of Septic System Required Based on Planning Materials & S	oil Evaluation	
Tank Size(s) (Gallons) 400/600/700 Al	osorption/Application Area (Sq Ft) 4,923	
Gallons Per Day (As Per TCEQ Table III) 300	_	RECEIVED
(Sites generating more than 5000 gallons per day are required to obtain a	a permit through TCEQ.)	
is the property located over the Edwards Recharge Zone? 🖂 Ye	53 I   INU	EC <b>31</b> 2018
(If yes, the planning materials must be completed by a Registered Sanita	rian (R.S.) or Professional Engineer (P.E.)	NTY ENGINEER
Is there an existing TCEQ approved WPAP for the property? $oximes$	Yes 🗌 No	•
(If yes, the R.S. or P.E. shall certify that the OSSF design complies with a	all provisions of the existing WPAP.)	
If there is no existing WPAP, does the proposed development acti	ivity require a TCEQ approved WPAP?	Yes ⊠ No
(If yes, the R.S. or P.E. shall certify that the OSSF design will comply with be issued for the proposed OSSF until the proposed WPAP has been applying the proposed will be included in the proposed		to Construct will not
Is the property located over the Edwards Contributing Zone?	Yes 🛛 No	
Is there an existing TCEQ approval CZP for the property?	es 🗵 No	
(If yes, the P.E. or R.S. shall certify that the OSSF design complies with a	Ill provisions of the existing CZP.)	
If there is no existing CZP, does the proposed development activity	y require a TCEQ approved CZP? 🔲 Yes	⊠ No
(If yes, the R.S. or P.E. shall certify that the OSSF design will comply with issued for the proposed OSSF until the CZP has been approved by the a		Construct will not be
Is this property within an incorporated city? $\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \$		
If yes, indicate the city:		
By signing this application, I certify that:  - The information provided above is true and correct to the best of my known and the constant of the online posting/public release of my e-mail as		applicable.
Do sel	12-28-18	
Signature of Designer	Date	Page 2 of 2

Page 2 of 2

Jim W. Blake, Sr., RS 2289 P. O. Box 1609 Helotes, TX 78023

> Telephone (830) 931-0292 Fax (830) 931-0409

> > RECEIVED

November 26, 2018

DEC 31 201

Comal County Environmental Office 195 David Jonas Drive New Braunfels, TX 78132-3760 COUNTY ENGINEER

RE: Lot 1030, Vintage Oaks at the Vineyard, Unit 6 (1979 Incrociato)

To Whom It May Concern:

I hereby certify that the On-Site Sewage Facility (OSSF) design for the above referenced property complies with all provisions of the proposed Water Protection Abatement Plan (WPAP), as approved by the Texas Commission on Environmental Quality (TCEQ).

Please contact me at the number listed above if you should have any desire to discuss this matter.

Sincerely,

Jim W. Blake, Sr. JB Septic Systems, Inc.

# 2/6

## AFFIDAVIT TO THE PUBLIC



01806049124 12/28/2018 04:25:06 PM 1/2

The County of Comal § State of Texas §

RECEIVED

DEC 31 2018

### CERTIFICATION OF OSSF REQUIRING MAINTENANCE

According to Texas Commission on Environmental Quality Rules for On-Site Sewage Facilities (CASE) ENGINEER this document is filed in the Deed Records of Comal County, Texas.

Ι

The Texas Health & Safety Code, Chapter 366 authorizes the Texas Commission on Environmental Quality (commission) to regulate on-site sewage facilities (OSSFs). Additionally, the Texas Water Code (TWC), § 5.012 and § 5.013, gives the commission primary responsibility for implementing the laws of the State of Texas relating to water and adopting rules necessary to carry out its powers and duties under the TWC. The commission, under the authority of the TWC and the Texas Health and Safety Code, requires owner's to provide notice to the public that certain types of OSSFs are located on specific pieces of property. To achieve this notice, the commission requires a recorded affidavit. Additionally, the owner must provide proof of the recording to the OSSF permitting authority. This recorded affidavit is not a representation or warranty by the commission of the suitability of this OSSF, nor does it constitute any guarantee by the commission that the appropriate OSSF was installed.

П

An OSSF requiring a maintenance contract, according to 30 Texas Administrative Code § 285.91(12) will be installed on the property described as Tract 5: <u>Lot 1030</u>, <u>Vintage Oaks At The Vineyard</u>, <u>Unit 6</u>, an addition to Comal County, <u>Texas and according to the plat of the development filed of record in Document No. 201306051565, Map and Plat Records of Comal County, <u>Texas.</u></u>

The property is owned by Century Land Holdings, II, LLC a Colorado limited liability company, D/B/A Century LH II, LLC

This OSSF must be covered by a continuous maintenance contract for the first two years. After the initial two-year service policy, the owner of an aerobic treatment system for a single family residence shall either obtain a maintenance contract within 30 days or maintain the system personally.

Upon sale or transfer of the above-described property, the permit for the OSSF shall be transferred to the buyer or new owner. A copy of the planning materials for the OSSF can be obtained from the Comal County Engineer's Office.

WITNESS BY HAND(S) ON THIS 14th Day of December, 2018

Notary Public, State of Texas

KAY L. COEN-LUBOJASKY

Ny Notary ID # 200320

Expires October 31, 2021

Notary/s Printed Name: KAY L CIEL LIWSTADEY/
My Commission Expires: 16 31-2621



RECEIVED

DEC 31 2018

COUNTY ENGINEER

This page has been added to comply with the statutory requirement that the clerk shall stamp the recording information at the bottom of the last page.

This page becomes part of the document identified by the file clerk number affixed on preceding pages.

Filed and Recorded Official Public Records Bobbie Koepp, County Clerk Comal County Texas 12/28/2018 04:25:06 PM JESSICA 2 Page(s) 201806049124

## J.B. Septic Systems, Inc. Two-Year Initial Service Policy

Page one

System Owner: Century Land Holdings, II, LLC	Brand Name: Clearstream Wastewater Systen	n RECEIVED
	System Name: Primary Serial Number: Model Number: Permit Number:	DEC 31 2018
		COUNTY ENGINEER
Site: Legal Description:	1979 Incrociato, Lot 1030 Vintage Oaks at the Vineyard, Unit 6, Comal C	County

J. B. Septic Maintenance, Inc. will inspect and service your Clearstream Aerobic Treatment Plant once every four months for a period of two years. The effective date of this initial maintenance contract shall be the date the License to Operate is issued.

Before this initial two-year service policy expires, JB Septic Maintenance, Inc will notify you. Upon renewal of the contract, a copy of the new contract shall be submitted to the permitting authority. If the property owner or maintenance company desire to discontinue the maintenance contract, the maintenance company shall notify, in writing, the permitting authority at least 30 days prior to the date service will cease.

### Testing and Reporting

- J.B. Septic Maintenance, Inc. shall test and report on this system as required by rule on the following:
  - 1. An Inspection/Service Call every 4 months, which includes inspections, adjustment, and servicing of the mechanical and electrical component parts as necessary to ensure proper function.
  - 2. An effluent quality inspection every 4 months, consisting of a visual check for color, turbidity, scum overflow, and an examination for odors.
  - 3. A sample shall be pulled from the aeration tank every 4 months to determine if there is an excess of solids in the treatment plant. If the test results determine a need for solids removal, the user will be notified and the system will be pumped upon owner authorization.
  - 4. If any improper operation is observed which cannot be corrected at the time, the user shall be notified immediately in writing of the conditions and the estimated date of correction.
  - If required, a chlorine residual test well be taken at each visit. (BOD and TSS annually on commercial only.) If a grab test is required, the Owner will be responsible for the cost of the grab test.

The owner is responsible for keeping chlorine (Bleach) in the chlorinator as well as the cost of the chlorine.

J.B. Septic Maintenance, Inc. has been certified by the manufacturer of your system, and will be responsible for fulfilling the requirements of this Maintenance Contract, as well as responding to any alarms and/or addressing any concerns by the owner of the system. Alarms and/or concerns will be addressed within 48 hours of the initial contact.

VIOLATIONS OF WARRANTY including shutting off the electric current to the system for more than 24 hours, disconnecting the alarm system, restricting ventilation to the aerator, overloading the system above its rated capacity, or introducing excessive amounts of harmful matter into the system, or any other form of unusual abuse.

### Page Two

## This Policy Does Not Include;

- 1. Cost of Pumping Sludge From Unit If Necessary.
- 2. Cost of System Repair Due to Damage or Parts Failure Due to Neglect.
- 3. Cost of Replacement of "Normal Wear & Tear" Items During Routine Maintenance Visits.

The Maintenance Company and the Owner agree to abide by the service policy as stated above.

### MAINTENANCE COMPANY:

J.B. Septic Maintenance, Inc. P.O. Box 1609 Helotes, Texas 78023 (830) 931-0292 (210)414-6289

## Installation Company:

J.B. Septic Systems, Inc. P.O. Box 1609 Helotes, Texas 78023 (830) 931-0292

## MANUFACTURER:

Clearstream Wastewater Systems, Inc. P.O. Box 7568
Beaumont, Texas 77726-7568
(409) 755-1500

## RECEIVED

DEC 31 2018

COUNTY ENGINEER

## Permitting Authority:

Comal County Office of Environmental Health 195 David Jonas Drive New Braunfels, TX 78132-3760 (830) 608-2094

Jim Blake J. B. Septic Systems, Inc.

Service Company Operator License Number: MP0000892

## J. B. Septic Systems, Inc.

Jim Blake Sr. Registered Sanitarian P.O. Box 1609 Helotes, Texas 78023

> Telephone (830) 931-0292 Fax (830) 931-0409

## **SITE EVALUATION**

RECEIVED

DEC 21 2019

				DEC 91 COR
LOCA	ATION: _		0, Vintage Oaks at the Vineyard, nerociato) Comal County	
I.	USDA C	,		omfort-Rock Outcrop Complex
II.	Soil Ana		Two soil borings located in	n the proposed absorption area
III.			clay soil with stones underlain l	by limestone
IV.		ture Classific Class Ia	ation: _Soil Class IbSoil Class II _Soil Class	oil Class III X Soil Class IV
V.	Soil Stru	cture:	Blocky	AND TO SERVICE OF THE
VI.			(Note any dense clay sub-soils, Rock at approximately 10'	rock or fractured rock, depth of
VII.	Topogra	phy:	2 % slope	
VIII:	Flood H	azard:	No	
IX. O	verall Site	Suitability:	The site is Suitable for Aerobic T	Treatment with Spray Irrigation.
X. Re	charge Zo	one: Yes. No	recharge features found within 1	50 Ft. of OSSF site.
Sigr	<u>J. Sir.</u>		November 26-2018 TEX	OS0010832 Registration #

Jim Blake Sr. Registered Sanitarian P.O. Box 1609 Helotes, Texas 78023

> Telephone (830) 931-0292 Fax (830) 931-0409

## **ON-SITE SEWAGE FACILITY DESIGN**

RECEIVED

FOR:

Century LH II, LLC

6500 River Place Blvd., Building 2, Suite 200

DEC 31 2018

Austin, TX 78730

COUNTY ENGINEER

LOCATION: 1979 Incrociato

Lot 1030

Vintage Oaks at the Vineyard, Unit 6

**Comal County** 

DEVELOPMENT: Proposed Four-bedroom residence with 2,745 sq. ft. living area.

ESTIMATE OF WATER CONSUMPTION: 300 gallons per day.

SEWAGE FACILITY DESCRIPTION: Clearstream Aerobic Treatment System with timer, chlorinator, sprinkler pump, and sprinkler heads covering a surface application area of 4,923 square feet. The timer is set for spray between midnight and 5:00 A.M.

## CALCULATION:

Application Area

Required = Flow = 300 Gals. /Day = 4,688 Sq. Ft.
Soil Appl. Rate = .064 Gals./Sq.Ft./Day

ACTUAL APPLICATION AREA TO BE COVERED:

(Radius of Sprinkler Head) X (Radius of Sprinkler Head) X 3.14 = Sq. Ft.

Two Full circle sprinkler heads, each one with a 28 foot radius = 4,923 Sq. Ft.

Total = 4,923 Sq. Ft.

ELECTRICAL WIRING – All wiring must be in complete compliance with 30 Texas Administrative Code 285.34(c) and with the most recent National Electric Code. All electrical components should have an electrical component within direct vision.

IIM BLAKE

2289

2289

SONAL STATEMENT OF THE PROPERTY OF THE

## AEROBIC TREATMENT SYSTEM COMPONENTS AND REQUIREMENTS \$1 2018

1. Minimum 400 gallon Pre-Treatment Tank.

2.

- COUNTY ENGINEER Aerobic Treatment Unit - 600 gallon TCEO approved unit.
- 3. Liquid Chlorinator - Only E.P.A. approved chlorine (Bleach) for use with wastewater shall be used. It is the owner's responsibility to ensure that it is functioning properly and has chlorine IN IT AT ALL TIMES.
- 700 gallon Pump Tank with a minimum ½ horsepower, 18 GPM well pump (Clearstream P-20 pump or 4. approved equivalent.)
- Sprinkler heads must be impact or gear driven rotary design with a maximum inlet pressure of 40 PSI. Only low 5. angle (13 degree trajectory) nozzles shall be used. All sprinkler heads shall be self-draining type so as to prevent in-line freezing. The exact location of sprinkler heads shall be coordinated between the installer and the property owner so that spray patterns shall not be blocked by trees, etc; a minimum of 10 feet shall be required between any sprinkler head and the base of a tree.
- SURFACE APPLICATION AREA The area to be sprayed shall have enough topsoil in place to cover the 6. force lines and to support the growth of vegetation. This vegetation shall consist of grasses, evergreen shrubs, bushes, trees or landscaped beds containing mixed flora. Exposed surface rock in the application area shall be removed or covered with soil and seeded or grassed laid. Sloped land is acceptable if properly landscaped and terraced to minimize run-off. Distribution pipes and sprinkler heads must provide uniform distribution of treated effluent. The application rate must be adjusted so as to not produce run-off. Owners shall not allow driveways, fences, storage buildings, or other structures to be constructed over the treatment or disposal systems. Land that is used for growing food, gardens, orchards, or crops that may be used for human consumption, as well as unseeded bare ground, shall not be used for surface application.
- 7. AFFIDAVIT (signed and notarized) included with this design should be a permanent part of the real property deed. TCEQ requires that it give proper notification to future owners of the continuous maintenance and administrative requirements of this OSSF system.
- **MAINTENANCE CONTRACT:** 8.
  - At the time of system installation, the contractor will submit to the authorized agent, (County Inspector) a copy of the 2-Year Service Policy as required by the TCEQ. Maintenance Company will file a detailed report of the dates and findings of these inspections to the Authorized Agent. This will ensure periodic inspections (at least every 4 months) for system compliance with effluent standards. Correct testing/evaluation of the unit will include periodic measuring of residual chlorine levels and/or fecal coliform analysis, as required by TCEO. Sludge accumulation will be monitored and the system owner will be notified when tanks require pumping.
- NOTE: SEE ATTACHMENT for water treatment equipment and appliances installation requirements. The back flush or discharge from water treatment equipment may be discharged into an On-Site Sewage Facility as provided in this attachment. Effective April 28, 2004.
- **REMARKS**: The contractor may make minor field adjustments to the system with approval of the county regulatory agency. The referenced site has been evaluated and the on-site sewerage facility has been designed generally following the requirements given by the Texas Commission on Environmental Quality and Comal County. The site evaluation and design are based upon technical information available today. The proper performance of any on-site sewerage facility cannot be guaranteed even though all provisions of the regulations have been met.
- CERTIFICATION: I hereby certify that this sewage facility design submitted conforms to the Texas Commission on Environmental Quality and Comal County requirements, and with proper use, maintenance, and under normal climatic conditions can be expected to function without creating a nuisance.

DATE: November 26, 2018

Jim Blake, Professional Sanitarian #2289


JIM BLAKE

TOTAL LOT AREA	50,447 SQ.FT.
SOD AREA FRONT	N/A SQ.FT.
SOD AREA REAR	N/A SQ.FT.
SLAB	4,226 SQ.FT.
DRIVEWAY .	2,005 SQ.FT
DRIVEWAY APRON	137 SQ.FT.
ENTRY WALK	203 SQ.FT
PUBLIC WALK	N/A SQ.FT.
FENCE	N/A LINEAR FT.
HOUSE ORIENT.	NW/NE
IMP. COVERAGE	12.8 %


RECEIVED

DEC 31 2018

COUNTY ENGINEER



COMAL INDEPENDENT
SCHOOL DISTRICT TRACT
25.11 AC.
DOC # 200906040730
OPRCCT

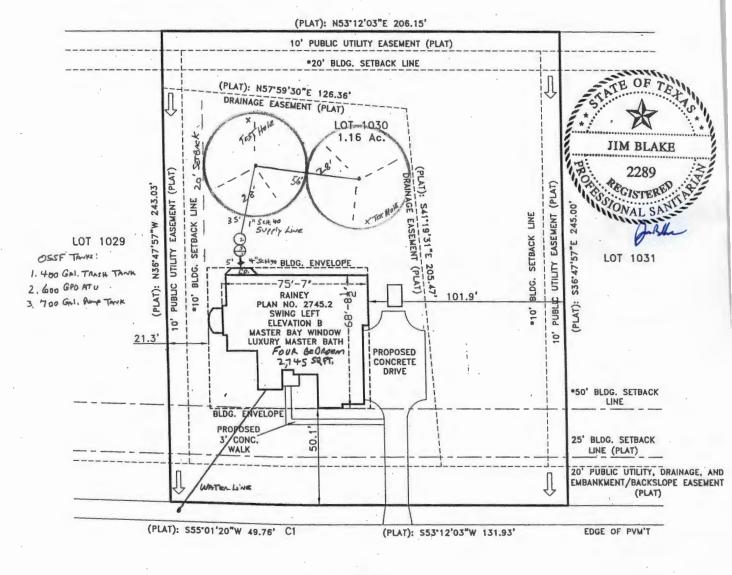

(ADDRESS: 1979) INCROCIATO

Propane

(60' RIGHT-OF-WAY)

STATE OF TEXAS COUNTY OF COMAL

1.) THIS PROPOSED SITE PLAN IS NOT A BOUNDARY SURVEY, AND IS PREPARED FOR ILLUSTRATION PURPOSES ONLY.

- 2.) \*RESTRICTIONS SHOWN ARE PER BUILDER.
- 3.) ALL FLATWORK TO BE DETERMINED BY BUILDER.
- 4.) DRAINAGE FLOW SHOWN IS APPROXIMATE PER THE RECORDED SUBDIVISION PLAT.

			DELTA 1°49'20"			
--	--	--	-------------------	--	--	--

10th

PREPARED FOR CENTURY HOMES

CAESAR A. GARCIA REGISTERED PROFESSIONAL LAND SURVEYOR No. 5904

- FOUND CORNER AS NOTED
- SET CORNER AS NOTED 0
- # EXIST. WOOD FENCE LINE
- --- PROP. WOOD FENCE LINE DENOTES SPOT ELEVATION
- FF= DENOTES FINISH FLOOR

DATE: 05/10/2018 D.B. \_ C.S.

REVISIONS:

## Cross Branch Surveying

2379 N.E. LOOP 410, NO. 5 SAN ANTONIO, TEXAS 78217 (210) 828-1102 T.B.P.L.S. FIRM REG. NO. 10180700

FINAL PLOT PLAN 1979 INCROCIATO, LOT 1030, VINTAGE OAKS AT THE VINEYARD UNIT 6 COMAL COUNTY, TEXAS

No.

### STATE MANDATED REGULATION CONCERNING AEROBIC SYSTEMS

NAME: Century LH II, LLC RECEIVED


LOCATION: 1979 Incrociato, New Braunfels, TX 78132

DATE: November 26, 2018 DEC 31 2018

COUNTY ENGINEER

As part of the installation of this system, the Texas Commission On Environmental Quality requires the following:

- 1. The property owner and the aerobic system maintenance contractor shall enter into a 2 year (minimum) full service maintenance contract in which the company will provide periodic inspections for system compliance with effluent standards. This contract will authorize the maintenance company to operate, maintain, and repair the system as needed. The costs of this service will be paid by the system's owner and may be included with the installation of the system. (See the attached Service Policy.)
- 2. The property owner shall submit an affidavit to the County Clerk's Office to be added to the Real Property Deed on which the surface application system is installed. (See the attached <u>AFFIDAVIT TO THE PUBLIC</u>.)
- 3. The maintenance company shall inspect this system as directed in the Service Policy and shall keep accurate records of their findings. These records shall be submitted to the County at the end of the first 2-year service life of the system.

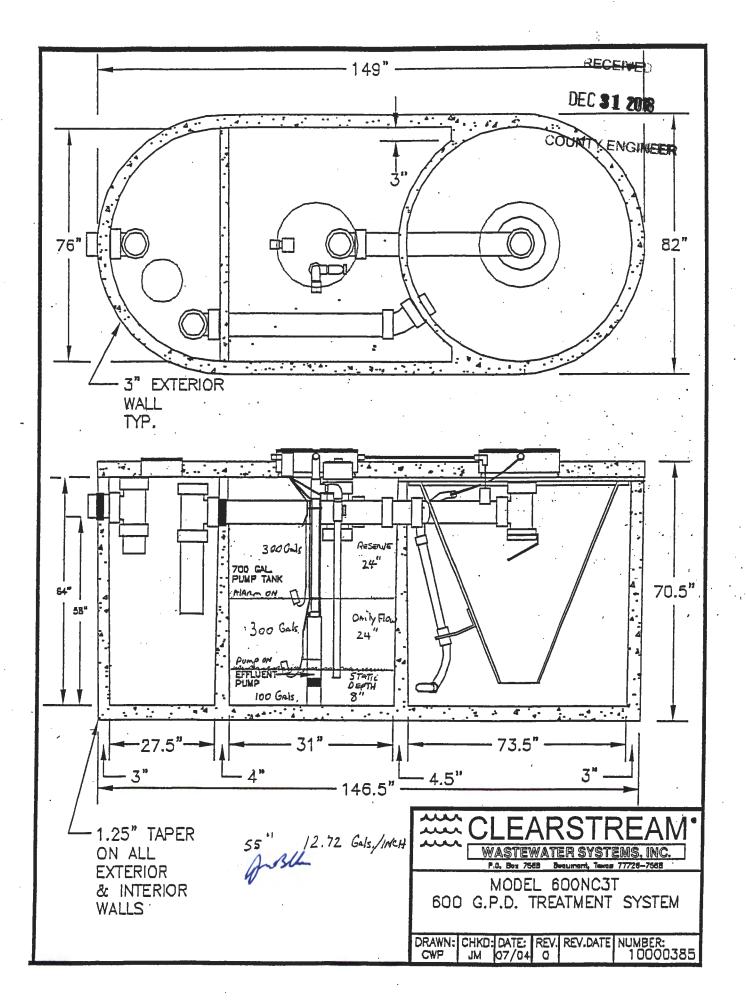

COUNTY ENGINEER



## **OWNER'S MANUAL**

## SERIES P20 4" SUBMERSIBLE PUMP

Two Wire, 1/2 HP, 115 Volt, 60 Hz
Installation • Operation

### LIMITED WARRANTY

Clearstream warrants to the original consumer of the products listed below, that they will be free from defects in material and workmanship for the Warranty Period from the date of installation as noted.

Product Warranty Period
4\* Submersible Pump 2 year

Our warranty will not apply to any product that has been subject to negligence, misapplication, improper Installation or maintenance.

Buyer's only remedy and Clearstream's only duty is to repair or replace defective products (at Clearstream's choice). Buyer agrees to pay all labor and shipping charges associated with this warranty and to request warranty service through the installing dealer as soon as a problem is discovered. If warranty service is requested after the Warranty Period has ended, it will not be honored.

CLEARSTREAM SHALL NOT BE LIABLE FOR ANY CONSEQUENTIAL, INCIDENTAL, OR CONTINGENT DAMAGES WHATSOEVER.

THE FUREGOING WARHANTIES ARE EXCLUSIVE AND IN LIEU OF ALL OTHER EXPRESS WARRANTIES. IMPLIED WARRANTIES, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, SHALL NOT EXTEND BEYOND THE WARRANTY PERIOD PROVIDED HEREIN.

Certain states do not permit the exclusion or limitation of incidental or consequential damages or the placing of limitations on the duration of an implied warranty, therefore, the limitations or exclusions herein may not apply. This warranty sets forth specific legal rights and obligations, however, additional rights may exist, which may vary from state to state.

Supersedes all previous publications.

Clearstream, P.O. Box 9337, Beaumont, TX 77709

CLEARSTREAM
P.O. Box 9337, Beaumont, TX 77709

## DEC 31 2018

## COUNTY ENGINEER

open. Start pump. Slowly open valve until the desired flow rate is reached. Final setting must be within pump's recommended operating range.

### **OPERATION**

- The pump must be submerged at all times during normal operation. Do not run pump dry.
- Make sure that the float switches are set so that the pump stops before the pump runs dry or breaks suction. If necessary, adjust float switches to achieve this.
- The motor bearings are lubricated internally. No maintenance is required or possible on the pump or the motor.

## Table 1: Recommended Fusing Data 115 Volv60 Hz/1 Phase 2-Wire Cable

ЧР	Voltz/Hz/ Phase	Motor Winding Resistance Ohms	Max Load Amps	Locked Rotor Amps	Fuse Size Standard/ Dual Element
1/2	115/60/1	1.0-1.3	12.0	64.8	30/15

## Table 2: Power Supply Wire (Cable) Length in Feet 1 Phase, 2 Wire Cable, 60 Hz (Copper Wire Size - Service to motor)

Volts	НР	14 AWG	12 AWG	10 AWG	8 AWG	6 AWG	4 AWG	3 AWG	2 AWG	1 AWG	0 AWG
115	1/2	100	160	250	390	620	960	1190	1460	1780	2160

1.Maximum wire lengths shown maintain motor voltage at 95% of service entrance voltage, running at maximum nameplate, amperes. If service entrance voltage will be at least motor nameplate voltage under normal load conditions, 50% additional length

is permissable for all sizes.

2.Sizes given are for copper wire. For aluminum wire go twn sizes larger (i.e., if table lists #12 copper wire, use #10 aluminum wire.)

### · Motor Insulation Resistance Readings

Normal Ohm/Megohm readings for all motors, between all leads and ground. Set ohmmmeter to 100K scale.

Condition of Motor and Leads	Ohm Value	Megohm Value						
New motor, without power cable	20,000,000 (or more)	20.0						
Used motor, which can be reinstalled in tank	10,000,000 (or mare)	0.01						
Motor in Tank – Readings are Power Cable plus Motor								
New Motor	2,000,000 (or more)	2.0						
Motor in reasonably good condition	500,000 to 2,000,000	. 0.5–2.0						
Motor which may be damaged or have damaged power cable	20,000 to 500,000	0.02~0.5						
Do not pull motor for these reasons  Motor definitely damaged or with damaged power cable	10,000 to 20,000	0.010.02						
Pull motor and repair	10,000 10 20,000	5.51-0.02						
Failed motor or power cable — Pull motor and repair	Less than 10,000	0-0.01						

### Important Electrical Grounding Information


AWARNING Hazardous voltage. Can shock, burn, or kill. To reduce the risk of electrical shock during pump operation, ground and bond the pump and motor as follows:

- A. To reduce risk of electrical shock from metal parts of the assembly other than the pump, bond together all metal parts accessible at the tank top (including metal discharge pipe, metal tank top, and the like). Use a metal bonding conductor at least as large as the power cable conductors running down the well to the pump's motor.
- B. Clamp or weld (or both if necessary) this bonding conductor to the grounding means provided with the pump, which will be the equip
- ment-grounding terminal, the grounding conductor on the pump housing, or an equipment-grounding lead. The equipment-grounding lead, when provided, will be the conductor having green insulation; it may also have one or more yellow stripes.
- C. Ground the pump, motor, and any metallic condult that carries power cable conductors. Ground these back to the service by connecting a copper conductor from the pump, motor, and condult to the grounding screw provided within the supply-connection box wiring companment. This conductor must be at least as large as the circuit conduclors supplying the pump.

Save these instructions.



## Submersible Effluent Pump

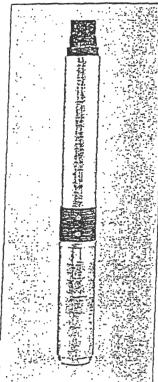

This product is Listed to UL Standards for Safety by Underwiters Laboratories Inc. (UL).

- Nylatron is a registered trademark of Polymer Corp.
- © Lexan is a registered trademark of General Electric Co.
- & Dekkn is a registered trademark of E.I. DuPont de Namours and Co.

Specifications are subject to chance without notice.

GENERAL DESCRIPTION The P20 multistage submersible effluent pump constructed from precision-engineered, corrosionresistant materials, is an industry leader in high pressure effluent removal. The floating stack design resists abrasion wear and reduces motor bearing thrust loading. These pumps feature the patented Signa-Seal™ design, which provides dry running capability in the event of a system failure. This patented Signa-Seal design has no industry equal.

**APPLICATIONS** Casigned for pumping filtered effluent.

SPECIFICATIONS Shell: stainless steet Discharge: fiberglass-reinforced thermoplastic Discharge bearing: Nylatron<sup>a</sup> intermediate bearing: (on larger units) polycarbonate, nitrile rubber, and stainless steel Impellers: Detrin®

Suction caps: Lexan' with stainless steel insert

Dillusers: Lexan\*

Thrust pads: proprietary spec. Shaft and coupling: stainless steel Intake: fiberglass-reinforced thermoplastic Intake screen: polypropylene

Cable guard: stainless steel Agency Listings: UL 778

- Patented Staging System Dur proven Signa-Seal™ staging system incorporates a harder-tizer-sand ceramic wear surface that when incorporated with our floating stack design, greatly reduces problems with abrasives, sand lock-up and running dry.
- Discharge Fiberglass-reinforced thermoplastic material for durability in aggressive water. Octagon-shaped to fit pipe wrench.
- Discharge Bearing Exclusive self-lubricating Nylatron\* bearing resists wear from sand.
- M Intake Fiberolass reinforced thermoplastic malerial for durability in aggressive water.
- M Shaft Positive drive from hexagonal heavy-duty 300 grade stainless steel.
- Coupling Stainless steel press fit to pump shaft. Couples to all standard NEMA motors.
- Shell Highest grade, heavy-walled corrosion-resistant stainless steel. Threaded for easy servicing.

- Hardware All screws, washers and nuts are corrosion-resistant 300 grade stainless steel.
- Check Valve Durable internal check valve.
- x Cable Guard Corrosion-resistant stainless steel guard protects motor leads. Tapered ends pravent pump from catching on well.
- 既 Corrosion-proof intake screen
- Franklin Electric Motor 100% corrosion-resistant stainless steel construction. Constant Jubrication through water-filled design. Hermetically-sealed stator assures moisture-free windings, Bult-in surge arrester provided on 1/2 HP through 1-1/2 HP, single-phase pumps for added protection. All thrust obsorbed by durable Kingsbury-type thrust bearing. Replaceable motor lead assembly. NEMA standard motors. 2- and 3-wire.

### ORDERING INFORMATION

Model No.	HP	Max: Load Amps	Volts	Phase/Cycles	Cord Length
P20	1/2	12	115	1/60	100"

### PERFORMANCE

				1	
Discharge Pressure PSI	57	52	44	; 33	19
Gallons Per Minute	10	15	20	25	30



## - NOTE -

We have a wide range of sump/sewage/effluent pumps to offer. If you need a catalog showing other available units, please contact your Clearstream representative.

## PROPLUS® GEAR JRIVEN SPRINKLER SETTING INSTRUCTIONS

**NOTE:** All of our sprinklers are preset for you with a 90° arc setting, and include a pre-installed #2.5 nozzle.

## **CHANGING A NOZZLE**

USE

### **USE YOUR K-KEY**

After you remove the nozzle retention screw with your K-Key, insert the K-Key into the keyhole on the top of the turret. Then, turn the K-Key 1/4 turn so it doesn't slip out of the hole when you pull it up.

2

### **PULL UP THE RISER**

Firmly pull the entire spring loaded riser up with the K-Key to access the nozzle socket. Hold the riser up with one hand.


3

## REMOVE THE NOZZLE

With the nozzle retention screw removed, insert the K-Key into the slot directly under the nozzle "prongs" at the top of the nozzle. Now, pivot your K-Key 1/4 of a turn to "hook" the nozzle and pull the nozzle out.

### **INSTALL A NOZZLE**

Press the desired nozzle into the nozzle socket. Make sure the nozzle number is visible and the nozzle "prongs" are up. Then, re-install the nozzle retention screw. NOTE: The nozzle retention screw is also a break-up screw and adjusts the distance of the spray.

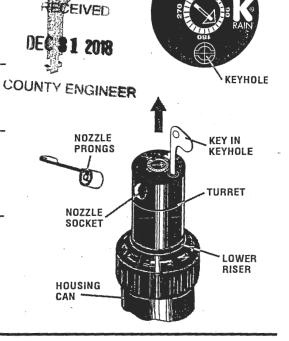

NOZZLE

SCREW

RETENTION

**TURRET TOP** 

NOZZLE

POSITION

KEY


## PROPLUS IS ADJUSTABLE AND CONTINUOUS 360° ALL IN ONE MODEL

SETTING THE ARC ADJUSTMENT (PRESET AT 90°)

5

### FIND THE LEFT START POSITION

First, rotate the turret with your fingers around to the RIGHT (clockwise) until it stops. Then, rotate the turret around to the LEFT until it stops again. This is the LEFT START position. The sprinkler will begin spraying from this point and will rotate clockwise.

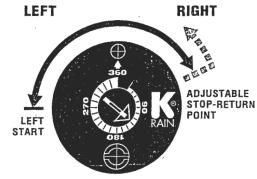

6

### TO CHANGE THE ARC SETTING BEFORE INSTALLATION

Follow step 5 above to find the LEFT START as a reference point. To INCREASE THE ARC, insert the K-Key into the arc indication ARROW SLOT at the center of the turret. While holding the turret with your fingers, turn the K-Key CLOCKWISE until the arc INDICATION ARROW POINTS TO the RIGHT STOPPING POINT.


## WHEN SET AT 360°, PROPLUS WILL ROTATE CONTINUOUSLY IN A CLOCKWISE DIRECTION.

To DECREASE THE ARC, hold the turret steady and turn the K-Key COUNTERCLOCKWISE to the desired setting.

## WITH THE SPRINKLER RUNNING

Follow step 2, hand-spinning the turret gently in the direction it is spraying. Once you have found the LEFT START as a reference point, following the directions to INCREASE THE ARC or DECREASE THE ARC as shown above.

## ARC SELECTION: 35° TO 360°



## §285.37. On-Site Sewage Facilities and Water Treatment Equipment and Appliances

- (a) Water treatment equipment is defined as an appliance, which includes water softeners and reverse osmosis systems, used to:
  - (1) alter the mineral content of water;

RECEIVED

(2) alter the microbiological content of water;

DEC 31 2018

- (3) alter other substances found in water; or
- (4) purify water.
- (b) Back flush or discharge from water treatment equipment installed on or after September 1, 2005; Hawren discharged into an on-site sewage facility (OSSF) as provided in this subsection.
  - (1) Water softener.
- (A) The water softener must regenerate using a demand-initiated regeneration (DIR) control device. The water softener must be clearly labeled as being equipped with a DIR control device as follows:
  - (i) the label shall be affixed to the outside of the water softener so the label can be easily inspected and read; and
  - (ii) the label shall provide the name of the company that installed the water softener.
- (B) A water softener may be connected to an OSSF with a non-standard or proprietary treatment system only as described in §285.32(c) and (d) of this title (relating to Criteria for Sewage Treatment Systems) if the water softener drain line:
  - (i) bypasses the treatment system; and
- (ii) connects directly to a pump tank if the OSSF has a pump tank or directly to the pipe between the treatment system and the disposal system if no pump tank exists.
- (C) An owner may continue to use a water softener that discharges to an OSSF and does not meet the requirements of subparagraph (A) of this paragraph if the water softener was installed before September 1, 2003. An owner must replace any water softener installed before September 1, 2003, with a water softener that meets the requirements of subparagraphs (A) and (B) of this paragraph at such time as:
  - (i) an owner replaces the existing water softener; or
- (ii) an owner or installer installs, alters, constructs, or repairs an OSSF for the structure or property served by the existing water softener.
  - (2) Reverse osmosis system.
- (A) Point-of-use (under sink unit) reverse osmosis systems. The back flush from a point-of-use reverse osmosis system may be discharged into an OSSF without including calculations of the back flush water volume in the OSSF planning materials.
- (B) Point-of-entry (whole house unit) reverse osmosis systems. The back flush from a point-of-entry reverse osmosis system may be discharged into an OSSF if:
- (i) the owner can demonstrate that the point-of-entry reverse osmosis system does not cause hydraulic overloading of the OSSF; or
- (ii) the water volume from the point-of-entry reverse osmosis system is accounted for (added to the usage rate in §285.91(3) of this title (relating to Tables)) by providing calculations of the increase in wastewater volume with the OSSF planning materials.
- (3) Water treatment equipment other than water softeners and reverse osmosis systems. If an owner uses water treatment equipment other than water softeners or reverse osmosis systems, the back flush from the water treatment equipment may be discharged into an OSSF if the water volume is added to the OSSF usage rate in §285.91(3) of this title. This water volume calculation must be provided with the OSSF planning materials.
- (c) Discharges from all water treatment equipment shall enter the OSSF system through an airgap or an airgap device as required in the Uniform Plumbing Code (2000).

Adopted April 7, 2004

Effective April 28, 2004




Texas Hill Country

RECEIVED

DEC 31 2018

COUNTY ENGINEER

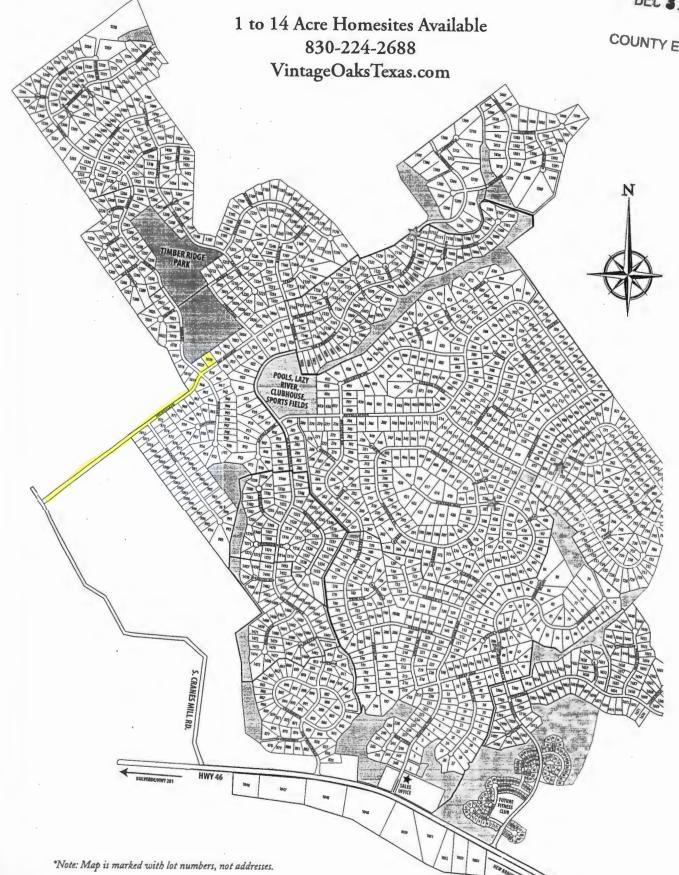

FILED BY
PRESIDIO TITLE
2-148877-00

NOTICE OF CONFIDENTIALITY RIGHTS: IF YOU ARE A NATURAL PERSON, YOU MAY REMOVE OR STRIKE ANY OR ALL OF THE FOLLOWING INFORMATION FROM ANY INSTRUMENT THAT TRANSFERS AN INTEREST IN REAL PROPERTY BEFORE IT IS FILED FOR RECORD IN THE PUBLIC RECORDS: YOUR SOCIAL SECURITY NUMBER OR YOUR DRIVER'S LICENSE NUMBER.

### SPECIAL WARRANTY DEED

THE STATE OF TEXAS

§ KNOW ALL MEN BY THESE PRESENTSECEIVED

COUNTY OF COMAL

§

Grantor:

SOUTHSTAR AT VINTAGE OAKS, LLC

DEC **31** 2018

P. O. Box 630105

Irving, Texas 75063-0105

COUNTY ENGINEER

Grantee:

CENTURY LAND HOLDINGS, II, LLC, a Colorado limited liability company,

D/B/A CENTURY LH II. LLC

8390 E. Crescent Parkway, Suite 650 Greenwood Village, Colorado 80111

That Grantor, for and in consideration of the sum of TEN AND NO/100 DOLLARS (\$10.00) cash and other good and valuable consideration to it in hand paid by Grantee, the receipt of which is hereby acknowledged and confessed has GRANTED, SOLD and CONVEYED, and by these presents does GRANT, SELL and CONVEY, unto the Grantee, the Property described herein to wit:

TRACT 1: Lot 999, VINTAGE OAKS AT THE VINEYARD, UNIT 6, an addition to Comal County, Texas and according to the plat of the development filed of record in Document #201306051565, Map and Plat Records of Comal County, Texas

TRACT 2: Lot 1003, VINTAGE OAKS AT THE VINEYARD, UNIT 6, an addition to Comal County, Texas and according to the plat of the development filed of record in Document #201306051565, Map and Plat Records of Comal County, Texas

TRACT 3: Lot 1004, VINTAGE OAKS AT THE VINEYARD, UNIT 6, an addition to Comal County, Texas and according to the plat of the development filed of record in Document #201306051565, Map and Plat Records of Comal County, Texas

TRACT 4: Lot 1012, VINTAGE OAKS AT THE VINEYARD, UNIT 6, an addition to Comal County, Texas and according to the plat of the development filed of record in Document #201306051565, Map and Plat Records of Comal County, Texas

TRACT 5: Lot 1030, VINTAGE OAKS AT THE VINEYARD, UNIT 6, an addition to Comal County, Texas and according to the plat of the development filed of record in Document #201306051565, Map and Plat Records of Comal County, Texas

(TRACT 1, TRACT 2, TRACT 3, TRACT 4 and TRACT 5 hereinafter collectively referred to as "Property").

TO HAVE AND TO HOLD the Property, together with all and singular the rights and appurtenances thereto in anyway belonging, unto Grantee, its heirs and assigns

CENTURY LAND HOLDINGS, ILLLC DEC 31 2018

forever; and Grantor does hereby bind itself, its heirs, successors and assigns, to WARRANT AND FOREVER DEFEND all and singular the Property unto the Grantee, its heirs and assigns, against every person whomsoever lawfully claiming or to claim the NGINEER same or any part thereof, when the claim is by, through or under Grantor, but not otherwise.

IT IS expressly UNDERSTOOD, ACKNOWLEDGED and AGREED that Grantor hereby RESERVES and EXCEPTS from this conveyance all oil, gas and other minerals of any type or form including all other rights appurtenant to the minerals and the mineral estate owned by Grantor, and does not transfer the minerals and the appurtenant rights thereto to Grantee.

IT IS further UNDERSTOOD, ACKNOWLEDGED and AGREED that Grantor hereby grants exclusive use of the surface to the Grantee and hereby waives all rights to the surface of the Property being conveyed in this Special Warranty Deed including all rights of ingress and egress and any right or any permitted uses Grantor may have as the owner of all or an undivided portion of the mineral estate in the Property as well as waiving the right to use, occupy or place any fixtures, equipment, building, or other structure on the surface of the Property in connection with the exploration or development of the mineral estate thereunder.

THIS CONVEYANCE IS MADE AND ACCEPTED by Grantee SUBJECT TO (i) taxes for the current year, which have been prorated as of the date of closing, the payment of which Grantee assumes; (ii) all subsequent tax assessments for the current year the payment of which Grantee assumes; (iii) the Declaration of Conditions, Covenants and Restrictions for Vintage Oaks at the Vineyard filed in the Official Real Property Records, Comal County, Texas, all other restrictions, covenants, conditions, easements, reservations, leases, mineral severances, and other instruments that affect the Property and as may be shown in the public records of Comal County, Texas; (iv) all zoning laws, regulations and ordinances of municipal and/or other governmental authorities that affect the Property and (v) the items listed below as Permitted Exceptions:

- Subject to the Declaration of Conditions, Covenants and Restrictions for Vintage Oaks at the Vineyard, recorded at Clerk's Document #200706000771, annexed by Document #201306051741, Document #201106044284, Document #201406032083, #201406036864, Document #201406037322, Document #201606000890, Document #201606020343, Document #201606034480, Document #201606034595 and the Assignment of Declarant Rights filed at Document #201206016339, Official Real Property Records, Comal County, Texas.
- Subject to those items, restrictions, building setback lines, easements and Notes shown on the plat recorded in Document #201306051565, Official Map and Plat Records of Comal County, Texas as well as those setbacks included in the Declaration of Conditions, Covenants and Restrictions and/or Design Guidelines for Vintage Oaks at the Vineyard;
  - (a.) Subject to a 50-foot building setback line from the front and rear property lines;
  - Subject to a 10-foot side property line building setback except on corner lots wherein the street-side corner shall have a 25-foot setback:
    - Subject to a 10-foot wide Public Utility and Drainage (c.)

easement adjacent to all non-street lot lines.

RECEIVED

(d.) Subject to Public Utility Easement, 20 feet from the front property line and 10 feet from the side and rear property lines.

DEC 31 2018

(e.) Public Drainage and Public Embankment/Backslope Easement adjacent to all street right of way lines.

COUNTY ENGINEER

- 3. Subject to Easement and Right-of-Way as provided in instrument recorded in Volume 73, Page 101, Deed Records of Comal County, Texas.
- 4. Electric Easement granted to New Braunfels Utilities by instrument dated October 26, 1998, recorded under Document #9806025937, Official Public Records, Comal County, Texas;
- 5. Maintenance Easement for Drainage Easements as provided by instrument recorded Document #201406020804, Official Public Records, Comal County, Texas (Lots 999 and 1030);
- 6. Deed Recordation Affidavit concerning Edwards Aquifer Protection Plan as provided in instrument recorded under Clerk's Document #200706020092, Official Public Records, Comal County, Texas.
- 7. Seller hereby RESERVES and EXCEPTS all oil, gas and other minerals of every kind and character in, on and under the Property together with all rights appurtenant thereto.

GRANTEE has purchased the foregoing Property, "AS IS," "WHERE IS," and "WITH ALL FAULTS." Except with respect to claims arising from covenants, agreements, representations and warranties expressly contained in the Purchase and Sale Agreement, GRANTEE hereby waives and fully releases GRANTOR and its affiliates, parent companies, partners, and their respective owners, employees, representatives and agents, from any and all claims that it may now have or hereafter acquire against GRANTOR or its affiliates, parent companies, partners, or their respective owners, employees, representatives and agents, for any cost, loss, liability, damage, expense, demand, action or cause of action arising from, related to or affecting the Property. GRANTEE further acknowledges and agrees that this release shall be given full force and effect according to each of its expressed terms and provisions, including those relating to unknown and unsuspected claims, damages and causes of action.

When the context requires, singular nouns and pronouns include the plural.

EXECUTED on the 26 day of October , 2016

SOUTHSTAR AT VINTAGE OAKS, LLC

Sr. Vice President - Operations

### **ACKNOWLEDGMENT**

RECEIVED

STATE OF TEXAS §
COUNTY OF Trails §

DEC 31 2018

COUNTY ENGINEER

This instrument was acknowledged before me on the <u>26</u> day of <u>OCTOBER</u>, 2016, by Thad Rutherford, Senior Vice President – Operations of SOUTHSTAR AT VINTAGE OAKS, LLC, Grantor in above Special Warranty Deed.

Derry H. Gle NOTARY PUBLIC, STATE OF TEXAS

AFTER RECORDING RETURN TO:

TERRY L. COLE
Notary Public, State of Texas
My Commission Expires
May 19, 2019

Filed and Recorded Official Public Records Bobbie Koepp, County Clerk Comal County, Texas 10/28/2016 08:13:49 AM LAURA 4 Pages(s) 201606040901



Bobbie Koepp

Page 1 of 2

### J.B. Septic Systems, Inc. Two-Year Initial Service Policy

System Owner: Lamond Jasper

Brand Name: Clearstream Wastewater System

System Name: Primary

Serial Number: <u>23486-06 NC 3T</u>

Model Number: 600 NC 3T Permit Number: 108588

Effective: 8/29/2019 thru 8/29/2021

Site Legal Description 1979 Incrociato, Lot 1030, Unit 6
Vintage Oaks at the Vineyard, Comal County

J. B. Septic Maintenance, Inc. will inspect and service your Clearstream Aerobic Treatment Plant once every four months for a period of two years. The initial two-year service policy shall be effective for two years from the date the OSSF is first used. This initial two year Service Policy will be at no additional charge to the property owner as required by State guidelines.

Before this initial two-year service policy expires, JB Septic Maintenance, Inc will notify you. Upon renewal of the contract, a copy of the new contract shall be submitted to the permitting authority. If the property owner or maintenance company desire to discontinue the maintenance contract, the maintenance company shall notify, in writing, the permitting authority at least 30 days prior to the date service will cease.

### Testing and Reporting

- J.B. Septic Maintenance, Inc. shall test and report on this system as required by rule on the following:
  - 1. An Inspection/Service Call every 4 months, which includes inspections, adjustment, and servicing of the mechanical and electrical component parts as necessary to ensure proper function.
  - An effluent quality inspection every 4 months, consisting of a visual check for color, turbidity, scum overflow, and an examination for odors.
  - 3. A sample shall be pulled from the aeration tank every 4 months to determine if there is an excess of solids in the treatment plant. If the test results determine a need for solids removal, the user will be notified and the system will be pumped upon owner authorization.
  - 4. If any improper operation is observed which cannot be corrected at the time, the user shall be notified immediately in writing of the conditions and the estimated date of correction.
  - If required, a chlorine residual test will be taken at each visit. (BOD and TSS annually on commercial only). If a grab test is required, the Owner will be responsible for the cost of the grab test.

The owner is responsible for keeping chlorine (Bleach) in the chlorinator as well as the cost of the chlorine.

J.B. Septic Maintenance, Inc. has been certified by the manufacturer of your system, and will be responsible for fulfilling the requirements of this Maintenance Contract, as well as responding to any alarms and/or addressing any concerns by the owner.

VIOLATIONS OF WARRANTY including shutting off the electric current to the system for more than 24 hours, disconnecting the alarm system, restricting ventilation to the aerator, overloading the system above its rated capacity, or introducing excessive amounts of harmful matter into the system, or any other form of unusual abuse.

Page 2 of 2

This Policy Does Not Include;

- 1. Cost of Pumping Sludge From Unit If Necessary.
- 2. Cost of System Repair Due to Damage or Parts Failure Due to Neglect.
- 3. Cost of Replacement of "Normal Wear & Tear" Items During Routine Maintenance Visits.

The Maintenance Company and the Owner agree to abide by the service policy as stated above.

### MAINTENANCE COMPANY:

J.B. Septic Maintenance, Inc. P.O. Box 1609 Helotes, Texas 78023 (830) 931-0292 (210) 414-6289

### Installation Company:

J.B. Septic Systems, Inc. P.O. Box 1609 Helotes, Texas 78023 (830) 931-0292

### MANUFACTURER:

Clearstream Wastewater Systems, Inc. P.O. Box 7568
Beaumont, Texas 77726-7568
(409) 755-1500

### Permitting Authority:

Comal County Office of Environment Health 195 David Jonas Drive New Braunfels, TX 78132-3760 (830) 608-2094

Jim Blake, Sr. J. B. Septic Maintenance, Inc.

System Owner

System Owner

Service Company Operator License Number: MP0000892

## J. B. Septic Maintenance, Inc.

<b>Installation</b>	Date: 8/29/2019	Scheduled Repo	ort	Permit Number: 1	08588
retained	ing and reporting record shall be c by the maintenance company. The o be sent to the system owner alon	e second copy is to be sent	t to the local per	mitting authority and the	
1.	Required frequency of visits is ev	drynonths.	D	ate of inspection visit: 1/3	/2020
2.	System inspected:	Owner:La	amond Jasper Jr		
	em Name: Primary	Property Address: 19			
		City, State., ZipCode: N			
	and Name: Clearstream odel Num: 600 NC 3T	Inspecto	ed by: Victor	(Signature)	
	Inspected Item	Operational	Inoperative	Not Applicable	
	Aerators	₩.			
	Filters				
	Irrigation Pumps	7			
	Recirculation Pumps	. 🗖		· 🔽	
	Disinfection Device	. 🔽			
	Chlorine Supply	<b>✓</b>			
	Electrical Circuits				
	Distribution System			Ħ	
	Sprayfield Vegetation/Seed	. <u> </u>	Ħ	Ħ	
	Other Item (Specify)		$\exists$		
	o mar starr (observi)	`			
3.	Repairs to system (list all compor	ents replaced);			
4.	Tests required and results:			Test	
	Test Required Check if YES	Results mg/1, mpn/100 ml, o	r trace	Method	
	BOD (Grab)			-	
	TSS (Grab)				
	Cl <sub>2</sub> (Grab)	0.2mg/L		DPD	
	Fecal Coliform				
5.	Comments:				
•	PT= 0"				
	ATU= 0 %				
	TT= 1" Lids secure at de	eparture			

## J. B. Septic Maintenance, Inc.

Installation Date: 8/29/2019	Scheduled Report	Permit Number: 108588
This testing and reporting record shall be or retained by the maintenance company. The copy is to be sent to the system owner alon  1. Required frequency of visits is ev	e second copy is to be sent to the g with an invoice for services be	ne local permitting authority and the third
	•	•
2. System inspected: System Name: Primary Serial Num: 23486-06 NC 3T Brand Name: Clearstream	Owner: Lamond Property Address: 1979 I City, State., ZipCode: New B Inspected by	ncrociato
Model Num: 600 NC 3T	Hispected by	· Victor Arvarado
Inspected Item	Operational Ino	(Signature) perative Not Applicable
•	operational mo	
Aerators	<b>√</b>	
Filters	<b>∀</b>	
Irrigation Pumps	<b>▼</b>	
Recirculation Pumps Disinfection Device		
Chlorine Supply		H H
Electrical Circuits		
Distribution System	<b>▼</b> :.	
Sprayfield Vegetation/Seed Other Item (Specify)	II 🔨	
<ol> <li>Repairs to system (list all compor Replaced air compressor &amp;</li> </ol>		
4. Tests required and results:		Total
Test Required Check if YES	Results mg/1, mpn/100 ml, or trace	<u>Test</u> <u>Method</u>
BOD (Grab)		
TSS (Grab)		
Cl <sub>2</sub> (Grab)	0.2mg/L	DPD
Fecal Coliform		
5. Comments:		
PT= 3 "		
ATU=5 %		
$TT=4$ " Lids secure at $\alpha$	lenarture	

### J.B. SEPTIC MAINTENANCE, INC.



#### SERVICE CONTRACT AGREEMENT

In consideration of the pre-payment of the <u>annual fee of \$275.00</u> this licensed maintenance provider will provide the following services for your On-Site Sewage Facility.

• Routine service visits once every 4 months during the service period of one year from 08/29/2021 to 08/29/2022 on the Aerobic system indicated below.

Owner:	Lamond Jasper Jr	Phone No:	(419) 357-2290
System:	Clearstream 600NC-3T	Permit:	108588
Address:	1979 Incrociato	Sub Division:	Vintage Oaks at the Vineyard
City/County:	New Braunfels/Comal		

#### Service calls will include:

- An effluent quality inspection consisting of a visual check for color and examination for odor.
- Adjustment of any mechanical and electrical components that are out of order (Replacement of materials or parts is not covered).
- 3. Sampling of the settled solids in the aeration chamber.
- 4. Check chlorine residual when applicable.
- Diffuser stones and air filters "normal wear and tear" items will be replaced as needed at an additional cost.
- 6. To avoid an additional trip charge, if your system needs a replacement part that is less than \$100.00, we will replace the part without authorization.

If any improper operation is observed which cannot be corrected at the time of the inspection, you shall be notified immediately in writing of the conditions and the estimated date and cost, if applicable, for correction.

At the conclusion of the service policy, J. B. Septic Maintenance, Inc. will make available, for purchase on an annual basis, a continuing service policy to cover labor for normal inspection and maintenance.

Owner / user operation instructions must be strictly followed. Also, it is the responsibility of the system owner to maintain chlorine in the system. The chlorine must be the appropriate type which is approved for waste water treatment.

J.B. Septic Maintenance, Inc. will be responsible for fulfilling the requirements of this Maintenance Contract, as well as responding to any alarms and/or addressing any concerns by the owner of the system. Alarms and/or concerns will be addressed within 48 hours of the initial contact.

Important: this service policy agreement does not cover the cost of service calls, labor or materials which are required or which are due to misuse or abuse of the system; failure to maintain electrical power to the system; disposal of non-biodegradable materials such as chemicals, solvents, grease, oil, paint, etc.; pumping of sludge build-up from the system; or any usage contrary to the requirements as stated in the "Operation Manual." Additional service, including replacement of components, laboratory test work, and pumping of tanks will be done upon customer authorization and at an additional charge.

Fax: 830-931-0409

OWNER

Signature

Date: 06/14

SERVICE

J.B. Septic Maintenance, Inc.

P.O. Box 1609 HELOTES, TX 78023

Email: info@jbsepticsystemsinc.com

## J. B. Septic Maintenance, Inc.

Installation Date: 8/29/2019	Scheduled Report	Permit Number: 108588
This testing and reporting record shall be corretained by the maintenance company. The copy is to be sent to the system owner along	second copy is to be sent to the local p g with an invoice for services by the ma	ermitting authority and the third intenance company.
<ol> <li>Required frequency of visits is ev</li> </ol>	<b>dry</b> nonths.	Date of inspection visit: 9/1/2021
2. System inspected: System Name: Primary Serial Num: 23486-06 NC 3T Brand Name: Clearstream Model Num: 600 NC 3T	Owner: Lamond Jasper Property Address: 1979 Incrociat City, State., ZipCode: New Braunfels Inspected by: Isaac	50 TX 78132
Inspected Item	Operational Inoperative	(Signature) Not Applicable
Aerators Filters Irrigation Pumps Recirculation Pumps Disinfection Device Chlorine Supply Electrical Circuits Distribution System Sprayfield Vegetation/Seedi		
<ol> <li>Repairs to system (list all compore</li> <li>Tests required and results:</li> </ol>	nents replaced):	
Test Required Check if YES  BOD (Grab)  TSS (Grab)	Results mg/1, mpn/100 ml, or trace	Test Method
Cl₂ (Grab) ✓	0.2 mg/L	DPD
Fecal Coliform  5. Comments:  PT= 0"  ATU= 5 %  TT= 2 " Lids secured at 6	leparture.	

## J. B. Septic Maintenance, Inc.

Installation Date: 8/29/2019	Scheduled Report	t	Permit Number: <u>108588</u>
This testing and reporting record shall be corretained by the maintenance company. The copy is to be sent to the system owner along	e second copy is to be sent to	o the local permittings by the maintenan	ng authority and the third ce company.
1. Required frequency of visits is ev	drynonths.	Date of in	spection visit: 10/26/2022
2. System inspected:	Owner:Lamo	ond Jasper Jr	
System Name: Primary	Property Address: 1979		
	City, State., ZipCode: New		
Brand Name: Clearstream	mspected	by: <u>Julio Esquiv</u>	al MSM
Model Num: 600 NC 3T			(Signature)
Inspected Item	Operational In	noperative Not	Applicable
Aerators	$\checkmark$		
Filters	$\checkmark$		
Irrigation Pumps	$\checkmark$		
Recirculation Pumps			$\checkmark$
Disinfection Device	✓ ✓		·
Chlorine Supply	$\checkmark$		
Electrical Circuits	<b>✓</b>		
Distribution System	$\checkmark$		
Sprayfield Vegetation/Seedi	r 🗸		
Other Item (Specify)			
3. Repairs to system (list all compon	ents replaced):		*
4. Tests required and results:			Test
<u>Test</u> <u>Required</u>	Results		Method
BOD (Grab) Check if YES	mg/1, mpn/100 ml, or tra	ace	
TSS (Grab)			
$Cl_2$ (Grab) $\checkmark$	0.2 mg/l		DPD
Fecal Coliform			
5. Comments:			· · ·
PT= 1"			
ATU= 15%			
TT= 2" Lids Secure at Do	eparture.		

## J. B. Septic Maintenance, Inc.

Installation Date: <u>8/29/2019</u>	<b>Scheduled Report</b>	Permit Number: <u>108588</u>
This testing and reporting record shall be cretained by the maintenance company. The copy is to be sent to the system owner alon	e second copy is to be sent to t g with an invoice for services	he local permitting authority and the third by the maintenance company.
1. Required frequency of visits is ev	drynonths.	Date of inspection visit: 3/9/2023
2. System inspected:	Owner:Lamor	<u>-</u>
System Name: Primary	Property Address: 1979	
	City, State., ZipCode: New I	y: Zoltan Juhasz O
Brand Name: Clearstream	mspected of	y. Zonan Junasz Choom
Model Num: 600 NC 3T		(Signature)
Inspected Item	Operational Inc	operative Not Applicable
Aerators	<b>✓</b>	
Filters	<u>~</u>	
Irrigation Pumps	<b>√</b>	
Recirculation Pumps		
Disinfection Device	<u>~</u>	
Chlorine Supply	<b>√</b>	
Electrical Circuits	<b>✓</b>	
Distribution System		
Sprayfield Vegetation/Seed	ir 🔽	
Other Item (Specify)	٠٠٠ النسا	H
Other Item (Speerly)		
3. Repairs to system (list all compor	nents replaced):	
4. Tests required and results:		Test
Test Required	<u>Results</u>	<u>Method</u>
Check if YES	mg/1, mpn/100 ml, or trac	e
BOD (Grab)		
TSS (Grab)		
Cl₂ (Grab) ✓	0.2 mg/l	DPD
Fecal Coliform		
5. Comments:		
PT= 0"		
ATU=0%		
TT= 4" Lids secure at de	parture.	

### J. B. Septic Maintenance, Inc.

Installation Date: 8/29/2019	<b>Scheduled Report</b>	Permit Number: 108588
This testing and reporting record shall be cretained by the maintenance company. The copy is to be sent to the system owner alon	e second copy is to be sent to the	ne local permitting authority and the third
1. Required frequency of visits is ev	<del>d</del> rynonths.	Date of inspection visit: 11/8/2023
2. System inspected:	Owner:Lamon	d Jasper Jr
System Name: Primary	Property Address: 1979	
	City, State., ZipCode: New E	
Brand Name: Clearstream	Inspected by	: Jose J Roman
Model Num: 600 NC 3T		(Signature)
Inspected Item	Operational Inc	perative Not Applicable
Aerators	$\checkmark$	
Filters	$\checkmark$	
Irrigation Pumps	$\checkmark$	
Recirculation Pumps		
Disinfection Device	$\checkmark$	
Chlorine Supply	V	
Electrical Circuits	$\checkmark$	
Distribution System	$\checkmark$	
Sprayfield Vegetation/Seed	ı 🗸	
Other Item (Specify)	_	
3. Repairs to system (list all compor	nents replaced):	
4. Tests required and results:		
Test Required Check if YES	Results mg/1, mpn/100 ml, or trace	<u>Test</u> <u>Method</u>
BOD (Grab)		
TSS (Grab)		
$Cl_2$ (Grab)		
Fecal Coliform		
5. Comments:		
PT= 0"		
ATU= 0 %		
TT= 5" Lids secure at de	parture.	

### J. B. Septic Maintenance, Inc.

MAR 28 2024

Contact: Jim Blake

Installation Date: 8/29/2019

PT= 2" ATU= 0 %

TT= 3 " Lids secure at departure

Scheduled Report

This testing and reporting record shall be completed, signed and dated after each inspection. One copy shall be

CANNED

Permit Number: 108588

retained by the maintenance company. The second copy is to be sent to the local permitting authority and the third copy is to be sent to the system owner along with an invoice for services by the maintenance company. Required frequency of visits is everynonths. Date of inspection visit: 3/22/2024 2. System inspected: Owner:Lamond Jasper Jr Property Address: 1979 Incrociato System Name: Primary City, State., ZipCode: New Braunfels, TX 78132 Serial Num: 23486-06 NC 3T Inspected by: Jose J Roman Brand Name: Clearstream Model Num: 600 NC 3T (Signature) Operational Inspected Item Inoperative Not Applicable Aerators Filters Irrigation Pumps Recirculation Pumps Disinfection Device Chlorine Supply **Electrical Circuits** Distribution System Sprayfield Vegetation/Seedir Other Item (Specify) 3. Repairs to system (list all components replaced): Replaced sprinkler Tests required and results: 4. Test Required Results Test Method Check if YES mg/1, mpn/100 ml, or trace BOD (Grab) TSS (Grab) Cl<sub>2</sub> (Grab) Fecal Coliform 5. Comments:

J. B. Septic Maintenance, Inc.

MAY 9 2024

Contact: Jim Blake

SCANNED

Installation Date: 8/29/2019	Scheduled Report	Permit Number: 108588
This testing and reporting record shall be coretained by the maintenance company. The copy is to be sent to the system owner along	ompleted, signed and dated afted second copy is to be sent to to g with an invoice for services	ter each inspection. One copy shall be the local permitting authority and the third
1. Required frequency of visits is even	<del>d</del> rynonths.	Date of inspection visit: 5/3/2024
2. System inspected: System Name: Primary Serial Num: 23486-06 NC 3T Brand Name: Clearstream Model Num: 600 NC 3T	Owner: <u>Lamon</u> Property Address: <u>1979</u> City, State., ZipCode: <u>New E</u> Inspected by	nd Jasper Jr Incrociato
Inspected Item	Operational Ino	(§ignature) pperative Not Applicable
Aerators Filters Irrigation Pumps Recirculation Pumps Disinfection Device Chlorine Supply Electrical Circuits Distribution System Sprayfield Vegetation/Seedin Other Item (Specify)  3. Repairs to system (list all compone		pperative Not Applicable
4. Tests required and results:  Test Required Check if YES BOD (Grab) TSS (Grab) Cl <sub>2</sub> (Grab) Fecal Coliform	Results mg/1, mpn/100 ml, or trace	Test Method
5. Comments:  PT= "  ATU= %		

TT= " Lids secure at departure.

J. B. Septic Maintenance, Inc.

3	CAI	THE	Shine . D
	marks and	and make the	Lamb of B

Contact: Jim Blake

Installation Date: 8/29/2019	Scheduled Report	Permit Number: <u>108588</u>
This testing and reporting record shall be c retained by the maintenance company. The copy is to be sent to the system owner along	e second copy is to be sent to the	he local permitting authority and the third
1. Required frequency of visits is ev	<del>'dry</del> nonths.	Date of inspection visit: 6/21/2024
2. System inspected:	Owner:Lamon	d Jasper Jr
System Name: Primary	Property Address: 1979	
	City, State., ZipCode: New E	
Brand Name: Clearstream Model Num: 600 NC 3T	inspected by	7: Jose J Roman
		(Signature)
Inspected Item	Operational Ino	perative Not Applicable
Aerators	$\checkmark$	
Filters	$\checkmark$	
Irrigation Pumps	$\checkmark$	
Recirculation Pumps		
Disinfection Device	$\checkmark$	
Chlorine Supply	$\checkmark$	
Electrical Circuits	✓ ✓ ✓ ir	
Distribution System	✓	
Sprayfield Vegetation/Seed	ir 🔽	
Other Item (Specify)	_	
3. Repairs to system (list all compo	nents replaced):	_
4. Tests required and results:		Test
Test Required Check if YES	<u>Results</u> mg/1, mpn/100 ml, or trace	Method
BOD (Grab)		
TSS (Grab)		
Cl <sub>2</sub> (Grab)		
Fecal Coliform		
5. Comments:		
PT= 1"		
ATU= 20 %		

TT= 2" Lids secure at departure.